CLEVER CLICK RIGID



Easy-to-install, versatile range of high-quality flooring designed to enhance any space with durability and style.


Guardian
Building Products

What is Clever Click Rigid?

Home is where your personal style truly comes to life, and there is no greater canvas than your floor. More than just a surface to walk on, it sets the tone for your entire space.

With Clever Click Rigid, you can enjoy the natural, refined look of wood and stone at a price and convenience that works for you. Choose from our wide range of designs, colours and formats, and install it in any room with ease to bring stylish practicality to your home.

CLEVER CLICK RIGID

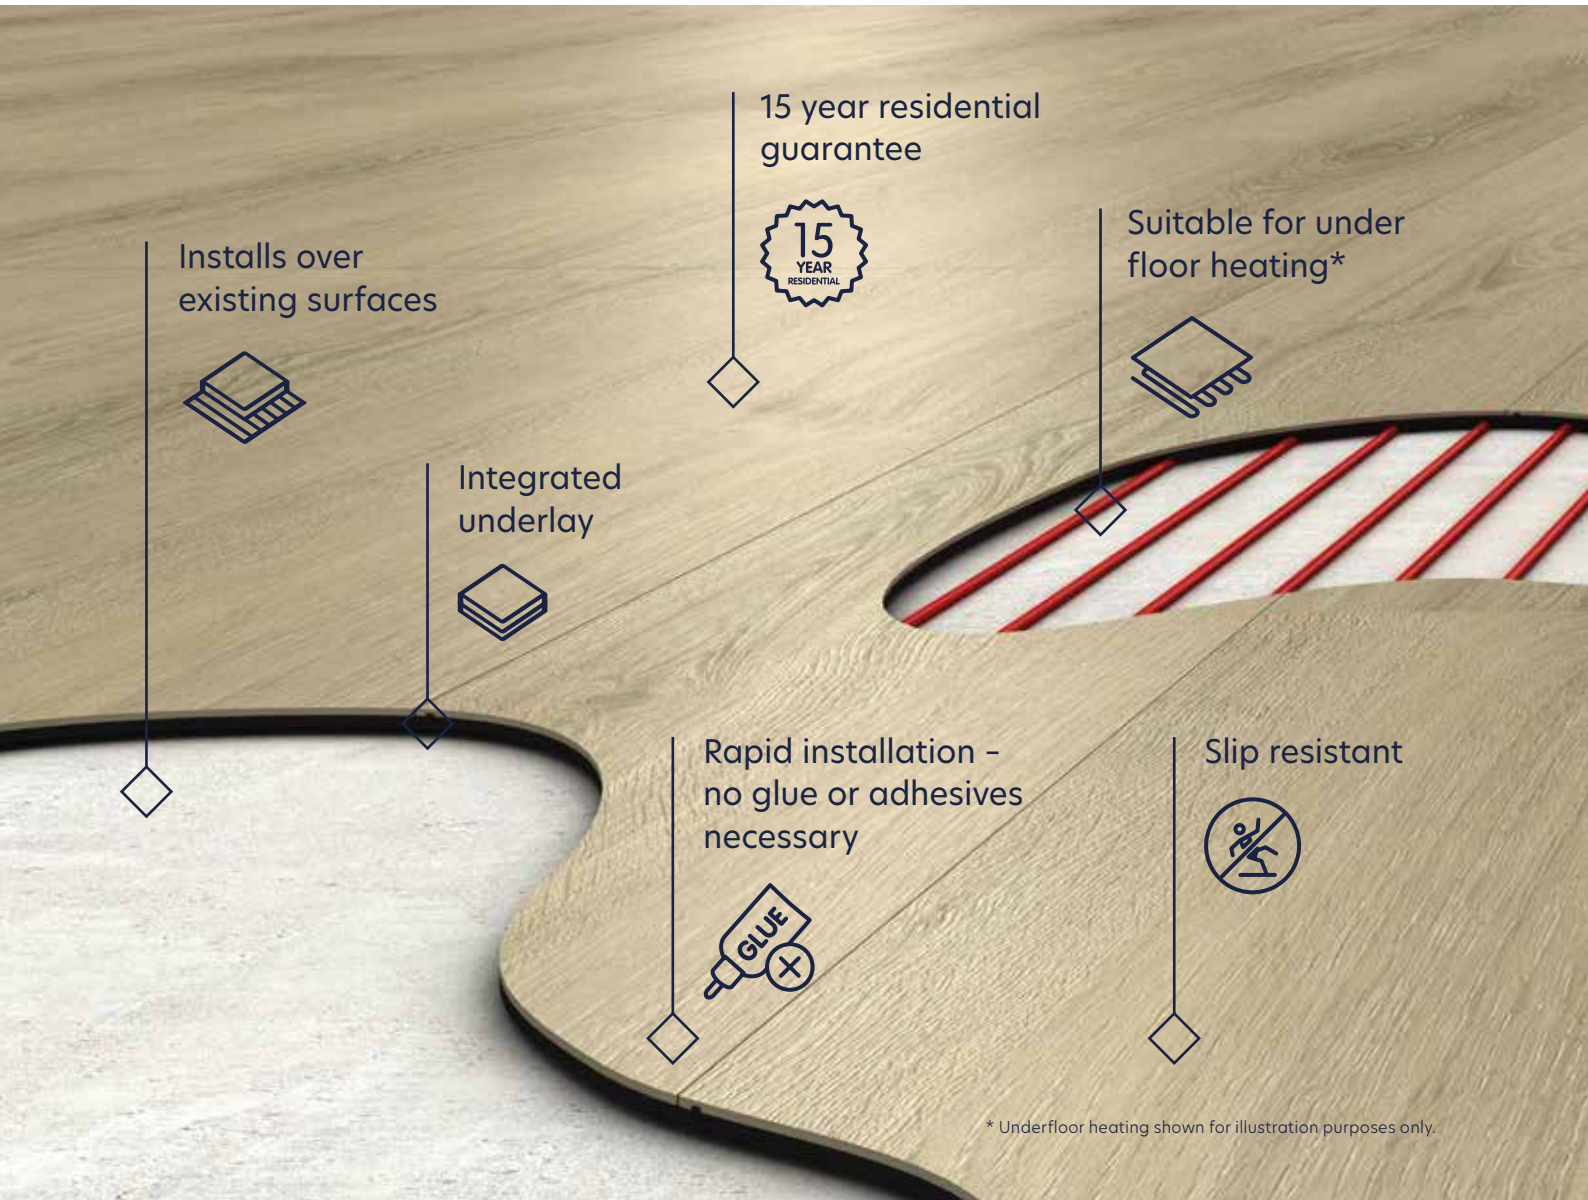

* Underfloor heating shown for illustration purposes only.

Designed to work over existing flooring substrates including floorboards, concrete and tiles





Why choose Clever Click Rigid?

Clever Click Rigid is a stone polymer composite (SPC) flooring solution designed for the demands of real homes. SPC stands out for its durability and ease of installation. This combination of strength and convenience makes it a practical choice for any room in your home.

What's the benefits of rigid SPC flooring?

Durability and Strength

SPC flooring solutions offer superior durability.
Its construction features a core made from crushed limestone, making it firm and more resistant to wear than more flexible solutions. This ensures it can stand up to the daily demands of your home.

Ease of Installation

One of the standout features of Clever Click Rigid is its easy installation process. Our innovative Clever Click technology makes installation quick and easy with no adhesive or complicated preparation required. You'll have a low-maintenance, slip and stain-resistant floor that's perfect for any room in no time.

Reduced Subfloor Preparation

Its rigid structure and integrated underlay allow it to be quickly installed over uneven subfloors without imperfections showing through. This means it can be laid directly over all kinds of existing floors, saving time and simplifying your renovation project.

Superior Dimensional Stability

Clever Click Rigid offers excellent stability which reduces the risk of shrinkage and expansion caused by changes in temperature, sunlight and humidity.

Low Maintenance and Long-lasting Appeal


Clever Click Rigid is scratch-resistant, stain-resistant, and requires minimal maintenance, meaning it stays looking fresh for years. It's easy-to-clean surface makes it a great option for busy households.

Improved Acoustics

Quietness is something we all value and with our Clever Click Rigid flooring range you get this. Our flooring has an IXPE integrated underlay, which ensures a high transmission sound reduction which is great for your home. In any busy household this is a welcome benefit as it softens sounds around your home.

Our Clever Click Rigid flooring consists of five layers, which provides strength, durability, comfort and softens acoustics.

1. **Protective PU Coating**
   This is the topcoat which adds protection against water, scratches and stains. With its matt finish it also makes it easy to clean.
2. **Wear Layer**
   A protective barrier that provides durability.
3. **PVC Décor Film**
   The design layer that gives your floor its stylish wood or stone look, available in a variety of patterns.
4. **Rigid Core**
   Provides strength and stability.
5. **IXPE Integrated Underlay**
   Eliminates the need for a separate underlay, making it easy to install and improves the acoustics in your home.

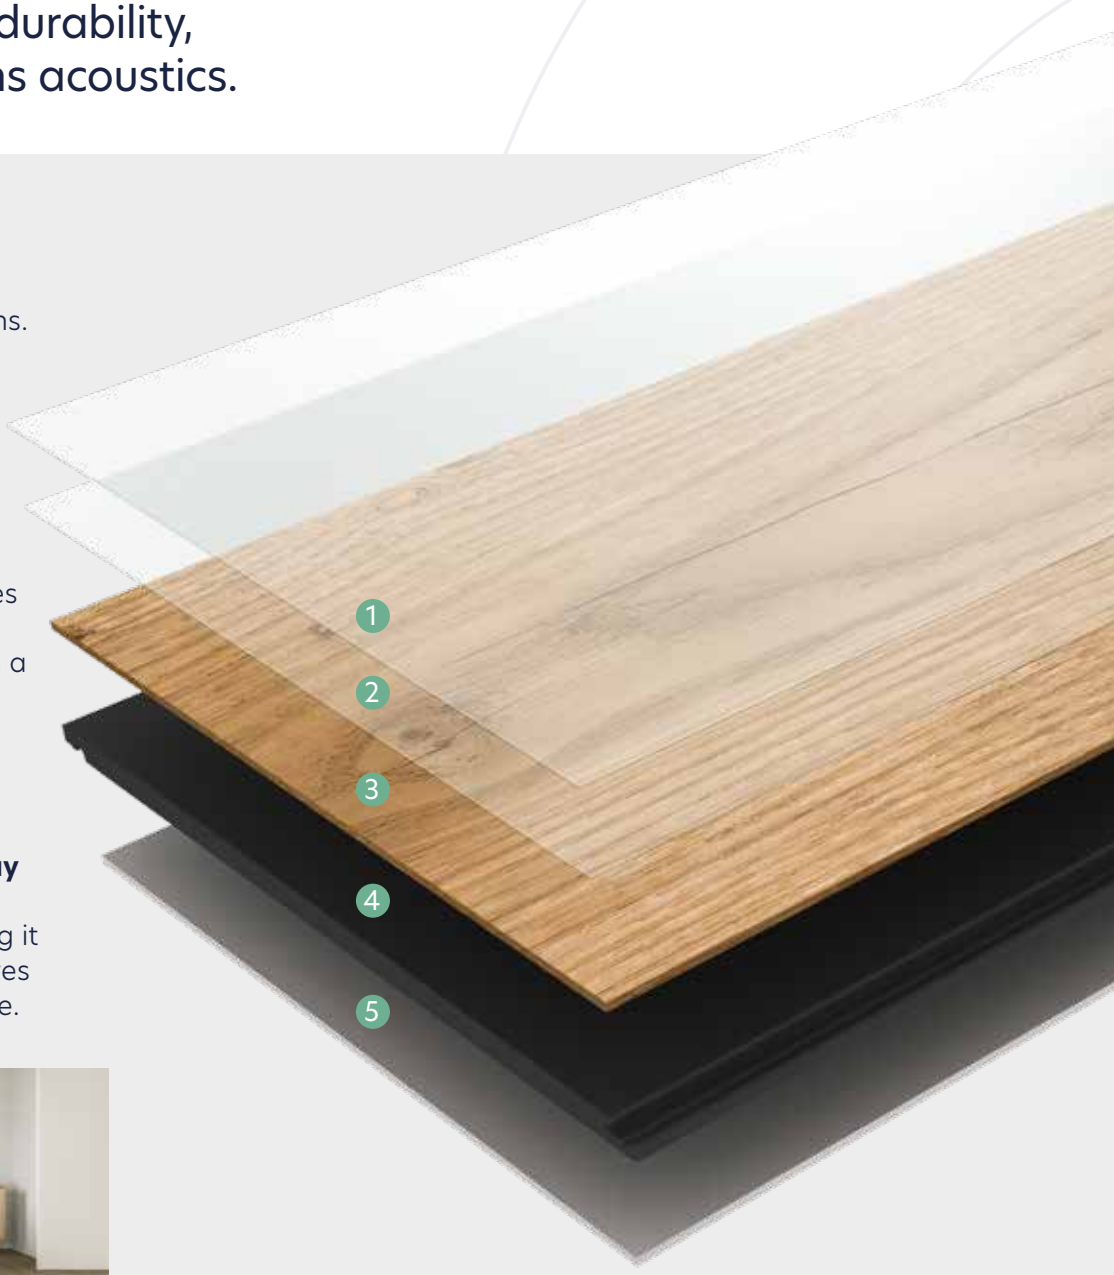





Florina Mosaic

Mosaic

UNILIN CLICK PATENTED TECHNOLOGY


4-sided Bevel

Elevate your floors with the **timeless charm** of our Mosaic Tiles, blending intricate design with **durable performance**.

These tiles are ideal for creating standout spaces in bathrooms, kitchens, hallways, and beyond. Whether you're going for a modern look or a classic finish, our mosaic range brings style and substance to every step.



Corfu Mosaic
305mm x 610mm

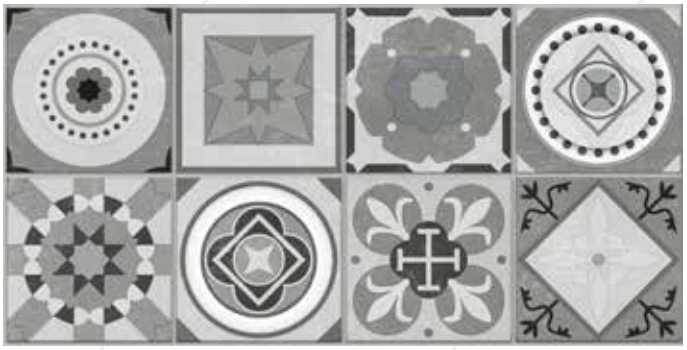

Valetta Mosaic
305mm x 610mm



Florina Mosaic
305mm x 610mm



Valetta Mosaic

Stone Collection

UNILIN CLICK PATENTED TECHNOLOGY

4-sided Bevel

Add industrial beauty to your home with our stone flooring range. The **earthy textures and natural tones** bring a grounded, architectural feel to any space.



Lisbon Stone
305mm x 610mm



Santiago Slate
305mm x 610mm



Genoa Stone
305mm x 610mm



Genoa Stone



Santiago Slate



Cannes Tile


Stone Collection

UNILIN CLICK PATENTED TECHNOLOGY

4-sided Bevel



Porto Tile
305mm x 610mm

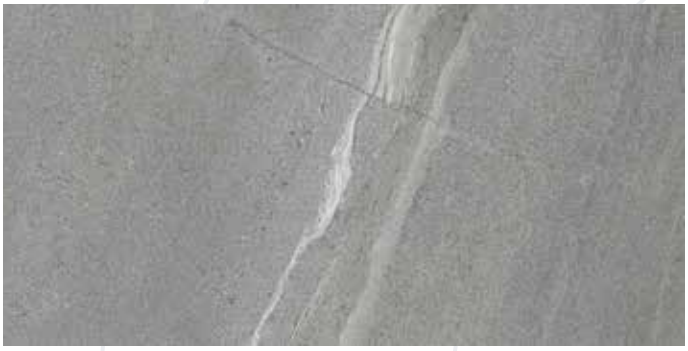

Montpellier Tile
305mm x 610mm



Cannes Tile
305mm x 610mm



Palma Stone
305mm x 610mm



Montpellier Tile

Herringbone

UNIZIP PATENTED TECHNOLOGY

4-sided Bevel

Bring **timeless elegance** into modern spaces with our Herringbone Flooring – now featuring **Unizip Technology**.

This innovative installation system eliminates the need for separate left and right planks, making it quicker and easier to achieve the classic herringbone look. Perfect for adding character and sophistication to any room with minimal hassle.



Wichita Beech Herringbone
125mm x 625mm



Concord Ash
125mm x 625mm



Lexington Oak Herringbone
125mm x 625mm



Concord Ash Herringbone



Lexington Oak Herringbone



Akron Teak

Wood Collection

4-sided Bevel

Bring **natural warmth** into your space with our timeless wood finishes. Its **life-like textures** and rich tones create a welcoming ambiance, perfect for adding character to your interiors.



Amarillo Walnut
180mm x 1,220mm



Denver Oak
180mm x 1,220mm



Concord Light Oak
180mm x 1,220mm



Boston Ash
180mm x 1,220mm

Wood Collection

UNILIN CLICK PATENTED TECHNOLOGY

4-sided Bevel



Buffalo Maple
180mm x 1,220mm



Portland Beech
180mm x 1,220mm



Springfield Ash
180mm x 1,220mm



Akron Teak
180mm x 1,220mm




Portland Beech



Palma Stone


Accessories

Clever Click Rigid Flooring Profiles are designed to handle height variations and create smooth transition between flooring types. Our profiles create the perfect finish for your flooring project.

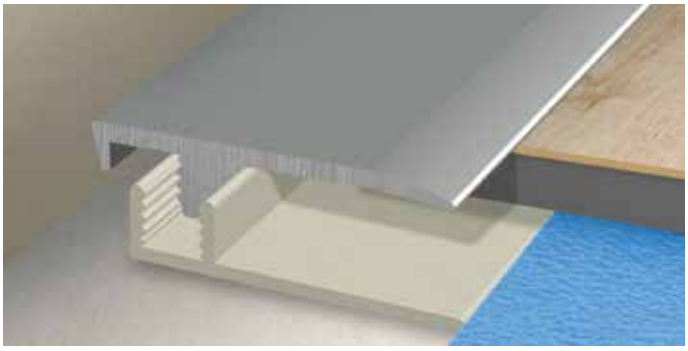

End Profile Silver 2m (4020080010)

End Profiles will provide a neat finish to the edge of a floor where it ends against a wall, a sliding door, or another surface that doesn't require a transition to another floor level.

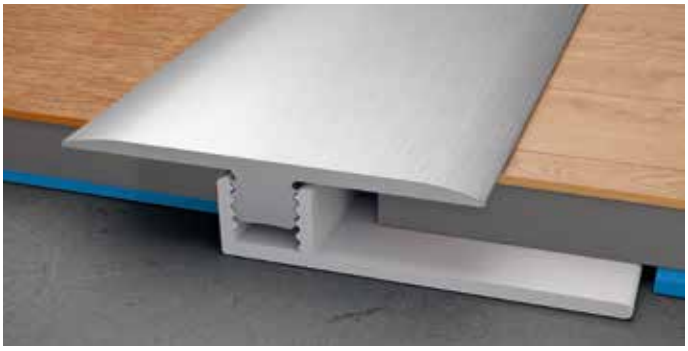

T Profile Silver 2m (4020080015)

T Profile is a flooring transition profile used to bridge two floors of equal height. It sits between the two floor edges and covers the expansion gap and can be used in door frames to break up rooms.



Adaptor Profile Silver 2m (4020080020)

Adaptor Profile is designed to bridge the height difference between two uneven floor surfaces, where a higher SPC floor meets a lower floor like vinyl, tile or concrete.



Flooring Protection

Flooring Protection is used to shield floors from damage during renovation, moving or daily use. It helps preserve the integrity, appearance and lifespan of your floor.

Technical Specifications

Stone by Colour





















Woods and Herringbone by Colour



























	Mosaic Tiles	Tiles
Dimensions:	305mm x 610mm	305mm x 610mm
Thickness:	5.5mm with integrated underlay	5mm with integrated underlay
Wear layer:	0.4mm	0.4mm
Bevel:	Micro	Micro
Waterproof:	Yes	Yes
Installation:	Unilin click	Unilin click





	Standard Planks	Herringbone Planks
Dimensions:	180mm x 1220mm	269mm x 640mm x 57mm
Thickness:	5mm with integrated underlay	6.0mm with integrated underlay
Wear layer:	0.4mm	0.4mm
Bevel:	Micro	Micro
Waterproof:	Yes	Yes
Installation:	Unilin click	Unizip

Technical Specifications

Mosaic

Product code	Description	Width x length (mm)	Number in pack	M² per pack	Packs per pallet
4020055050	Corfu Mosaic	305 x 610	8	1.49	48
4020055055	Valetta Mosaic	305 x 610	8	1.49	48
4020055060	Florina Mosaic	305 x 610	8	1.49	48

Stone

Product code	Description	Width x length (mm)	Number in pack	M² per pack	Packs per pallet
4020055010	Palma Stone	305 x 610	8	1.49	48
4020055015	Tangier Stone	305 x 610	8	1.49	48
4020055020	Lisbon Stone	305 x 610	8	1.49	48
4020055025	Porto Tile	305 x 610	8	1.49	48
4020055030	Montpellier Tile	305 x 610	8	1.49	48
4020055035	Cannes Tile	305 x 610	8	1.49	48
4020055040	Florence Slate	305 x 610	8	1.49	48
4020055045	Genoa Slate	305 x 610	8	1.49	48
4020055080	Santiago Slate	305 x 610	8	1.49	48

Herringbone

Product code	Description	Width x length (mm)	Number in pack	M² per pack	Packs per pallet
4020075010	Wichita Beech Herringbone	125 x 625	18	1.41	60
4020075015	Lexington Oak Herringbone	125 x 625	18	1.41	60
4020075020	Concord Ash Herringbone	125 x 625	18	1.41	60

Wood

Product code	Description	Width x length (mm)	Number in pack	M² per pack	Packs per pallet
4020065010	Amarillo Walnut	180 x 1220	8	1.76	50
4020065015	Denver Oak	180 x 1220	8	1.76	50
4020065020	Concord Light Oak	180 x 1220	8	1.76	50
4020065025	Springfield Ash	180 x 1220	8	1.76	50
4020065030	Buffalo Maple	180 x 1220	8	1.76	50
4020065035	Boston Ash	180 x 1220	8	1.76	50
4020065040	Portland Beech	180 x 1220	8	1.76	50
4020065045	Akron Teak	180 x 1220	8	1.76	50

Accessories

Product code	Description	Width x length (mm)
4020080010	End Profile Silver	25mm x 2000mm
4020080015	T Profile Silver	32mm x 2000mm
4020080020	Adaptor Profile Silver	31mm x 2000mm
9030010245 - FSDU only (holds 9 rolls) 4020030035 - One roll	Flooring Protection	1m x 10m

Testing

Property	Test method standard	Review in accordance with standard
Use of class	EN ISO 10874	Class 23, 32
Formaldehyde emission	EN 717-1	E1
Reaction to fire	EN 13501-1	Bfl-s1
Slip resistance	EN 13893	Class DS
Slip resistance	DIN EN 16165	R9/R10
Wear resistance	ISO 24338 Procedure A	≥ 4000 cycles
Micro-scratch resistance	EN 16094	≤ MSR-A3
Impact resistance	EN 13329	≥ 1200mm
Effect of furniture legs	EN ISO 16581	No visible damage
Castor chair resistance	EN ISO 4918	25,000 cycles
Resistance to staining	EN 438-2	Groups 1 and 2: grade 5 Group 3: grade 4
Locking strength [kN/m]	ISO 24334	Long side ≥ 1,0kN/m; short side ≥ 1,5kN/m
Light stability	EN ISO 105-B02	≥ 6
Antistatic resistance	EN 1815	< 2kV
Thermal conductivity and thermal resistance	EN 12664	0.112 W/(m·K) & 0.085 (m².K)/W
Dimensional stability	EN ISO 23999	≤ 0.15%
Curling after exposure to heat	EN ISO 23999	≤ 1mm
Residual indentation	ISO 24343-1	≤ 0.1mm
Sound insulation	ISO 10140-3 ISO 717-2	21 db
VOC emissions	ISO 16000 parts -3, -6, -9, 11	A+
CE		Certified
UKCA		Certified
EPD		Certified
Floorscore		Certified
Indoor Air Comfort Gold		Certified
Utilisation		Recyclable

Phthalat Free

Discover more on our website

Phone: 01332 296844
Visit: guardianbp.co.uk
Email: info@guardianbp.co.uk

Whilst Guardian has made every attempt to ensure that this information is accurate and reliable at the time of its publication; we cannot accept responsibility for any errors, omissions, inaccuracies or any changes that have occurred since the date of publication or for the results obtained from the use of such information.

Version 4 | September 2026

Guardian Building Products