



CLEVER CLICK

Luxury Vinyl Flooring



Revolutionary, quick and easy flooring with the natural beauty of wood and stone

What is Clever Click?

Available in a range of both Wood and Stone designs, Clever Click is a revolutionary, easy-to-install technology which cuts installation time by half compared to traditional vinyl flooring.

Clever Click technology removes the need for adhesive and lengthy room preparation, meaning your new floor can be installed in next to no time.

Designed to work over existing flooring substrates including floorboards, concrete and tiles

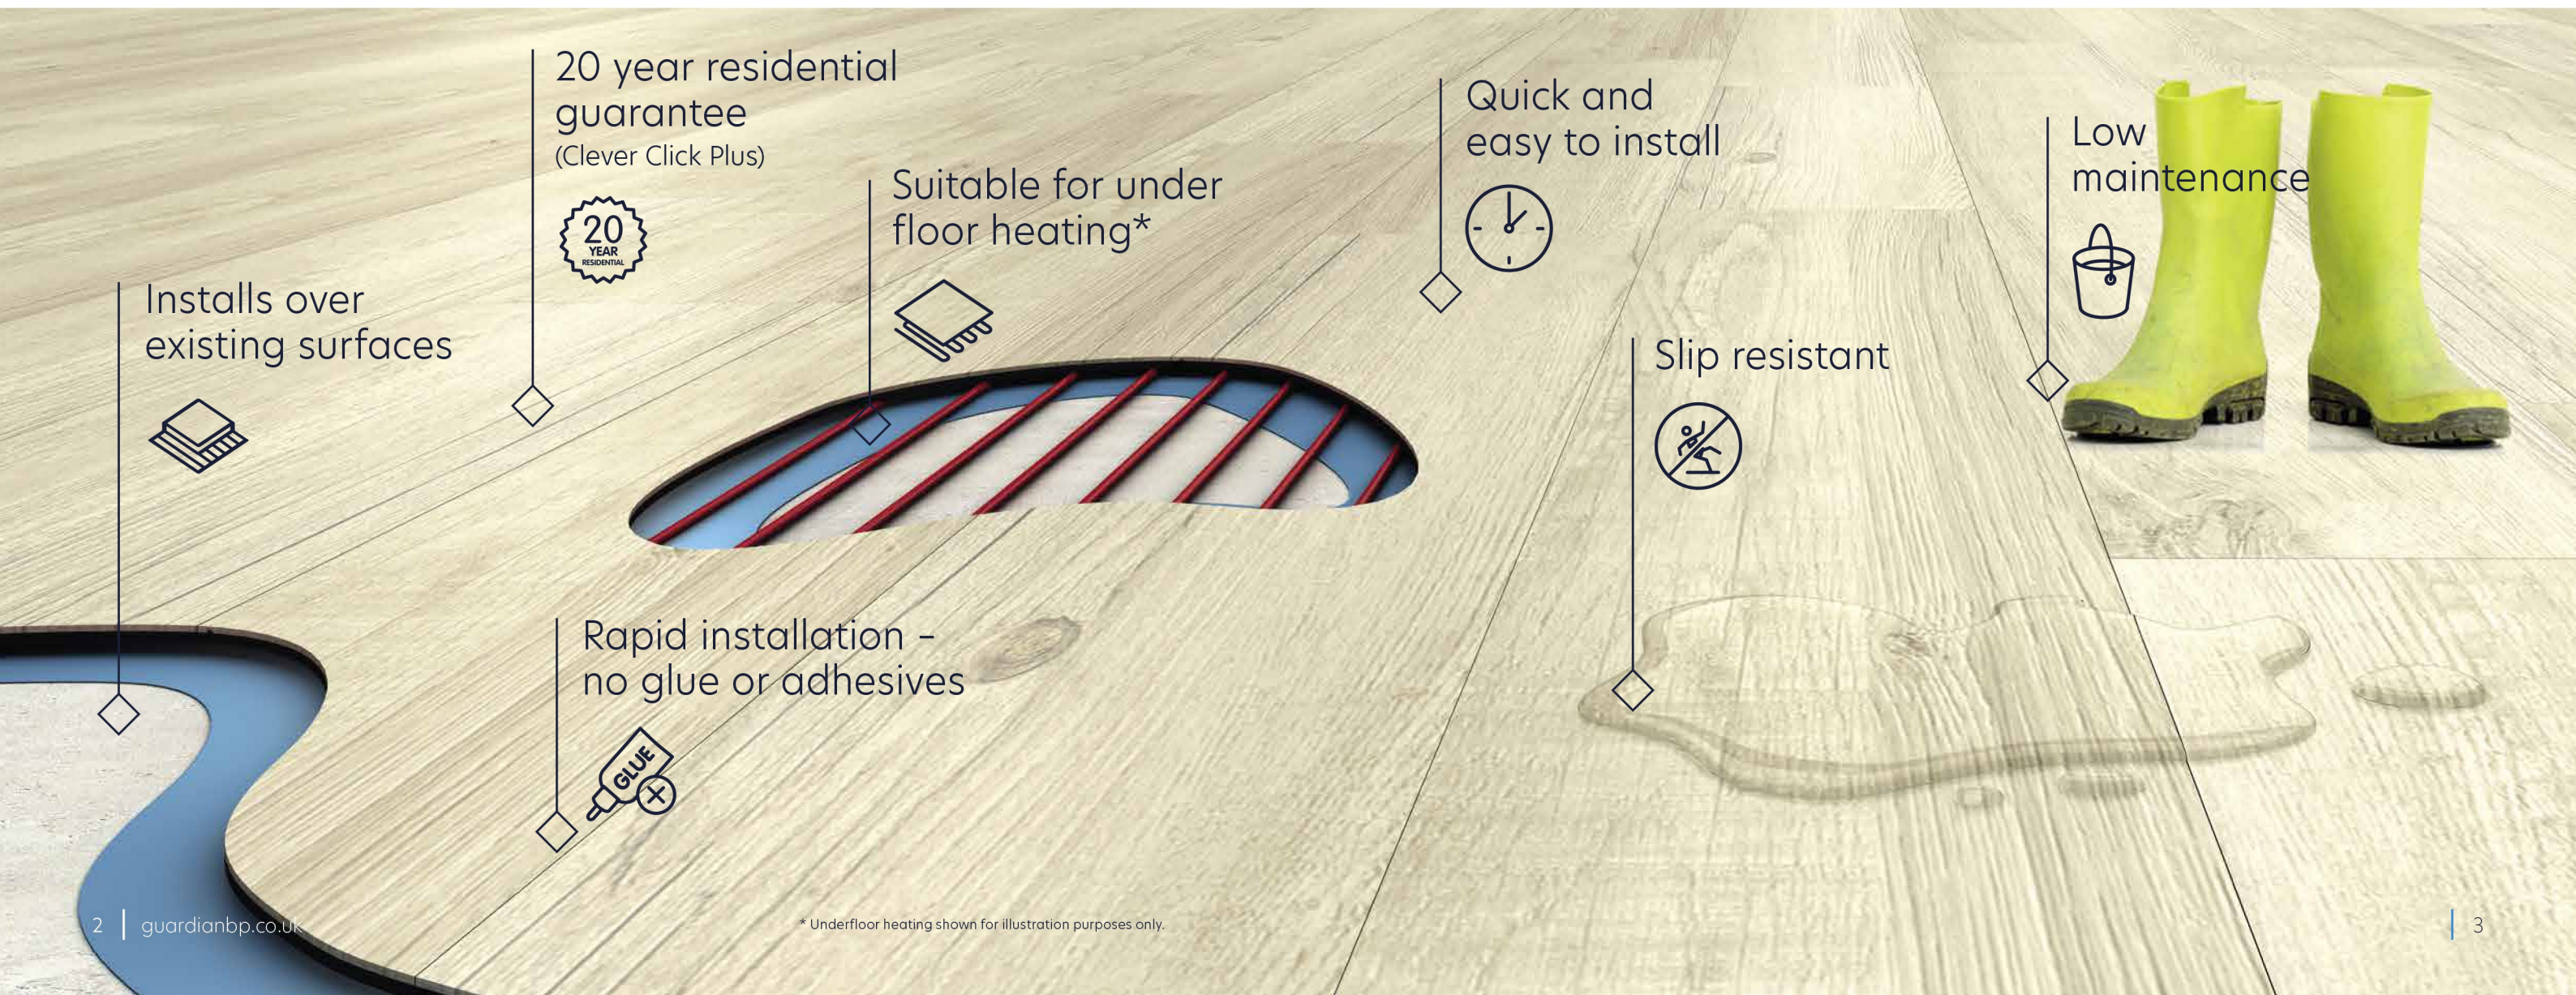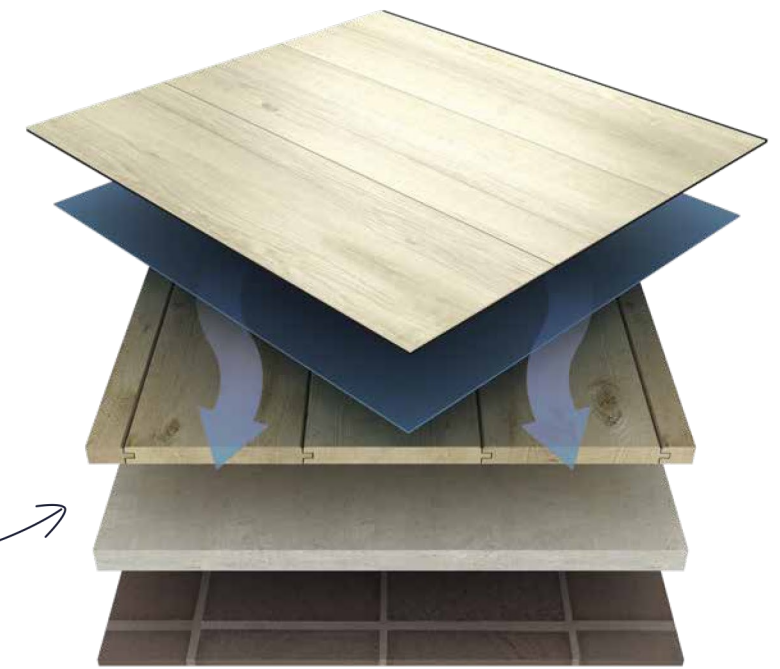

Installs over existing surfaces

20 year residential guarantee
(Clever Click Plus)



Suitable for under floor heating*



Quick and easy to install



Slip resistant



Low maintenance



Rapid installation - no glue or adhesives



* Underfloor heating shown for illustration purposes only.

Why choose Clever Click?

Clever Click is designed to provide all the stunning detail and outstanding natural beauty of conventional wood and stone floors - but at an affordable price.

Simple yet stylish patterns, that capture the natural elegance of stone and wood, create a feeling of tranquillity in a room.

Inspired designs, combined with the practical advantages of wear-resistant vinyl, create floors that function effectively in any room or environment.

Choose from the **Clever Click Plus** and **Clever Click** ranges - contemporary and classic designs that ensure you'll always find something to match your style.

- ◆ Gives any space a warm atmosphere.
- ◆ Adaptable to interior styles.
- ◆ Makes any space bigger and brighter.
- ◆ Natural palette so doesn't date quickly.
- ◆ Dirt-repellent and low maintenance.
- ◆ Ideal for renovations.

Scuff and Stain Resistant	Clever Click Plus Residential Guarantee	Clever Click Plus Commercial Guarantee	Clever Click Residential Guarantee	Clever Click Commercial Guarantee	Water Resistant	Natural Look and Feel	No Glue Required	Patented Technology
Quick and Easy Installation	Easy to Clean and Maintain	Warm and Quiet Under Foot	Superguard Protected	Suitable for all Rooms	No Delamination	Slip Resistant	Eco-friendly Solution	Made in the EU

Clever Click Plus
Bear Oak

CLEVER CLICK PLUS

Designer Floors: Stone Selection


Thickness: 4.5mm. Wear layer: PU 0.55mm.
Coverage: 1.49m² per box.



Dorato Stone
324mm x 655mm



Orion Jet Stone
324mm x 655mm

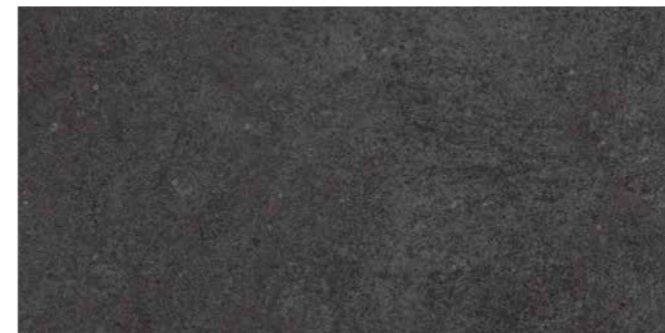

Florentine
324mm x 655mm



Monterey Stone
324mm x 655mm



Clever Click Joint



4-sided
Bevel

◆ CLEVER CLICK PLUS

Designer Floors: Wood Selection

Thickness: 4.5mm. Wear layer: PU 0.55mm.
 Coverage: 1.76m² per pack.
 Wood selection embossed and registered.



Chestnut Oak
191mm x 1316mm



Scarlet Oak
191mm x 1316mm



Bear Oak
191mm x 1316mm



White Oak
191mm x 1316mm



Smoked Oak
191mm x 1316mm



Whitewash Pine
191mm x 1316mm



Clever Click Joint



4-sided Bevel

CLEVER CLICK

Designer Floors: Stone Selection

Thickness: 4.5mm. Wear layer: PU 0.30mm.
Coverage: 1.49m² per box.



Ventura
324mm x 655mm



Belmont
324mm x 655mm



Galveston Stone
324mm x 655mm



Burlington Stone
324mm x 655mm



Clever Click Joint



Micro Bevel



CLEVER CLICK

Designer Floors: Wood Selection

Thickness: 4.5mm. Wear layer: PU 0.30mm.
Coverage: 1.76m² per pack.



Claremont Oak
191mm x 1316mm



Denver Oak
191mm x 1316mm



Hartford Wood
191mm x 1316mm



Huntington Wood
191mm x 1316mm



Pontiac Oak
191mm x 1316mm



Portland Wood
191mm x 1316mm



Clever Click Joint



Micro Bevel

It all starts with a solid foundation...



Xtrafloor Power
 Made of up to 90% natural raw materials, our Power standard underlay is 100% recyclable. Power boasts excellent thermal conductivity, making it the perfect choice for rooms with underfloor heating or cooling.
 This elastic underlay smooths out small subfloor irregularities; 1 metre wide x 10 metres long x 1.55mm thick. Its lightly tackified surface prevents LVT movement, allowing for an easier installation of your vinyl floor. The protective film captures all dust particles, making it possible to install the underlay while carrying out other work in the room.

Xtrafloor GO
 Is noise affecting your living comfort? Or are you trying to meet the current building regulations? Acoustic underlay is just what you need. Perfect for upper floors or flats in multi-storey buildings, GO blocks different types of noise, from footfall to vibrations.
 Extensively tested and officially certified, this sound-damping underlay shows outstanding impact sound reduction values of $\Delta L_w=19dB$ in combination with 4.5mm Clever Click Plus or Clever Click.
 A remarkable performance backed by official certificates. Enjoy the peace and quiet with Xtrafloor GO. Suited for under floor heating and cooling, the extruded closed-cell polyolefin foam material increases your floor's thermal insulation.
 Roll size: 980mm wide x 15.3 metres long x 1mm thick.

Starter Kit
 The starter kit is designed to keep your luxury vinyl floor looking its best for years to come and includes:
 ♦ 1L cleaner maintainer
 ♦ 500ml floor spill cleaner, flat cap loose trigger
 ♦ 1 pack of felt pads
 ♦ 1 non-abrasive sponge/scourer
 ♦ 6 blue cleaning cloths
 ♦ Promotional literature
 ♦ Instruction sheet

Xtrafloor Cleaner Maintainer
 Our concentrated cleaner has a fresh aroma for routine cleaning. Suitable for use with all cleaning methods including manual, spray buffing and scrubber-drying. Availability: 1 ltr / 2.5 ltr.

Xtrafloor Spot Remover
 A ready to use cleaner with a fresh aroma and formulated for removal of spills and other deposits. Availability: 500ml.

Xtrafloor Hand Roller
 Ensures a smooth click. A handy tool that, unlike hammers, will not damage your Clever Click floor.



- Total solution for residential purposes
- Smooths out subfloor irregularities 5mm in width, 2mm in height
- Improved sound insulation $\Delta L_w=13dB$ with 4.5mm Clever Click Plus or Clever Click
- Lightly tackified surface and dust-capturing protective foil for easy installation

- Smooths out subfloor irregularities 5mm in width, 2mm in height
- Improved sound insulation $\Delta L_w=19dB$ with 4.5mm Clever Click Plus or Clever Click
- Non-skid coating for quick and easy installation

Technical Specifications

**100%
 DESIGNED
 & MADE IN
 BELGIUM**

		CLEVER CLICK PLUS		CLEVER CLICK	
Level of use	EN ISO 10874	23 - 33 - 42	23 - 33 - 42	23 - 31	23 - 31
Total thickness	EN ISO 24346	ca. 4.5mm	ca. 4.5mm	4.5mm	4.5mm
Wear layer	EN ISO 24340	ca. 0.55mm	ca. 0.55mm	0.30mm	0.30mm
Wear layer PUR treatment	-	Superguard®			
Total weight kg/m²	EN ISO 23997	ca. 7.68	ca. 7.68	7.82	7.80
Plank / Tile size	EN ISO 24342	191mm x 1,316mm	324mm x 655mm	191mm x 1,316mm	324mm x 655mm
Pieces per box	-	7	7	7	7
Coverage per box	-	1.76m²	1.49m²	1.76m²	1.49m²
Inflammability	EN 13501	Bfl-S1			
Scratch resistance	EN ISO 660-2	Class T			
Squareness & straightness	EN ISO 24342	≤ 0.35mm			
Slip resistance	EN 13893	DS			
Slip restraint	DIN 51130	R10	R10	R10	R10
Residual indentation	EN ISO 24343-1	≤ 0.10 mm			
Furniture leg resistance	EN ISO 16581	No cracks, no damage			
Curling	EN ISO 23999	≤ 2mm			
Electrical resistance	EN 1081	≤ 10 ⁹ hm			
Dimensional stability	EN ISO 23999	Norm: ≤ 0.25%. Average result measured: ≤ 0.05%			
Heat insulation	EN ISO 10456	0.25w/(m.K)			
Thermal resistance R	EN 12664	0.0159m².K/W	0.0159m².K/W	0.0154m².K/W	0.0154m².K/W
Electrostatic performance	EN 1815	< 2kV			
Fomaldehyde group	EN 717-1	E1			
Acoustic insulation	EN ISO 717-2	4dB			
Castor chair resistance	EN ISO 4918	No damage to wearlayer, no delamination			
Stain resistance	EN ISO 26987	Very good			
Light fastness	EN ISO 105-B02	≥ 6			
Underfloor heating	EN 12524	Suitable, max 27°C			
Resistance to chemicals	EN 423	Very good	Very good	-	-
Warranty	-	20 yrs Residential / 10 yrs Commercial		12 yrs Residential / 5 yrs Commercial	

The warranty covers manufacturing defects and premature wear in the event of normal use.

