



Product Catalogue

HIGH PERFORMANCE SEALANTS, FOAMS AND ADHESIVES

Proud sponsor of:




Soudal Worldwide

Soudal is the largest independent European manufacturer of PU foams, sealants, adhesives and building chemicals for the construction, retail and industrial markets. Soudal now operates on a fully global basis with 17 manufacturing locations, 63 subsidiaries and sales into over 130 countries. The head-count is now more than 2,800 employees. In 2017 the Group's consolidated turnover was in excess of €760M. Continued investments in R&D, a long-term vision for innovation and adaptations to local market requirements have resulted in Soudal's excellent performance, for which it was named Company of the Year in 2011.



In 2016 Soudal celebrated 50 years of quality and innovation.

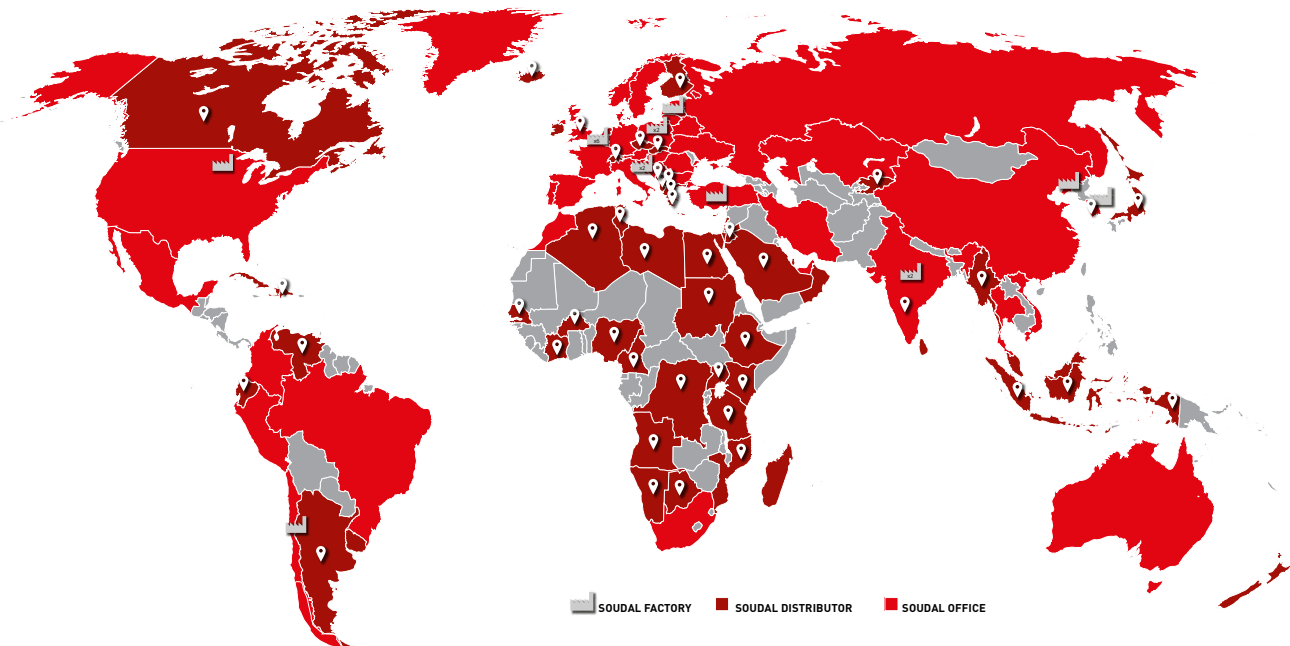

FACTORIES

EUROPE

- Turnhout (Belgium)
Sealants (Plant 1) - Foams (Plant 2) - Adhesives (Plant 3)
- Overpelt (Belgium)
Aerosols
- Sapac (Netherlands)
Adhesives
- Weert (Netherlands)
Adhesives
- Pionki (Poland)
Sealants (Plant 1) - Foams (Plant 1) - Adhesives (Plant 2)

- Srpenica (Slovenia)
Sealants - Foams - Adhesives - Admixtures
- Dobele (Latvia)
Sealants
- Istanbul (Turkey)
Sealants
- Sežana (Slovenia)
Adhesives

ASIA

- Bawal (India)
Sealants
- Chennai (India)
Sealants
- Shanghai (China)
Sealants - Foams
- Seoul (South-Korea)
Sealants

NORTH AMERICA

- Kentucky (USA)
Sealants - Adhesives

SOUTH AMERICA

- Santiago (Chile)
Sealants - Adhesives



www.soudal.com

www.fixall.co.uk



SODAL - Experts in sealants, foams and adhesives

Founded in 1966 by current Chairman Vic Swerts, Soudal has grown at over 10% per year, every year. Its success is based on the quality of its products and its ability to stay at the cutting edge of technology through innovation.

Quality

Every week more than 4 million cartridges and 2 million cannisters of PU Foam are manufactured in our state of the art production facilities on various continents according to exacting quality standards. To maintain these standards, Soudal became the first company in its industry to achieve the ISO 9001 quality certification. Product consistency and full traceability are therefore ensured across the huge range of over 1,000 chemical formulations.

Innovation

Highly qualified scientists, engineers and application technicians develop state of the art formulas, packaging and accessories to perfectly suit the demands of both the market and end users. Driven by the will to continuously improve and to provide better and more environmentally friendly solutions for its customers, Soudal is leading from the front in product innovation.

Commitment to customers

Apart from offering an extensive range of high quality products, Soudal offers ongoing commitment to providing outstanding service, guaranteed delivery times and a personalised approach to on-going partnerships with existing customers. Soudal's legendary flexibility in production and logistics stands it in good stead. Technical support is also a vital component of Soudal's commitment to customer service. This approach to customer service, together with an innovative and high quality product range has proved to be a winning formula.

Golden Bridge Awards

In November 2015 Soudal was awarded this prestigious award for outstanding achievements in export to the UK. The judges praised the impressive track record of 40% growth during the previous three years, the high degree of integration in the UK market and the array of products specifically designed for the UK market. This shows respect for local markets and a long-term vision to implement all necessary steps for sustainable growth.



Soudal Professional Range

The Soudal Professional Range is the most innovative and comprehensive branded range of sealants, adhesives, fillers, building chemicals, cleaners, lubricants and ancillary products for the construction and industrial markets.

SOUDAL WINDOW SYSTEM - SWS® is an innovative system of premium quality sealing and filling products used to make weatherproof and airtight connection joints between windows and doors and the building envelope. SWS® improves thermal and acoustic properties and has been independently tested for long-term airtight performance.

The SWS® range includes **Soudaseal 215 LM**, a hybrid polymer sealant with several application benefits over neutral silicone sealants. It also includes Soudafoam Window & Door SWS, a truly airtight expanding foam based on Soudal's **FLEXIFOAM®** technology.

SILIRUB® is a structured range of branded silicones for industrial, construction and sanitary sealing applications. It includes Silirub® 2, the silicone sealant reference, independently tested to ISO 11600 F&G 25 LM. It also includes the unique Silirub® COLOR service, providing practically any RAL CLASSIC colour quickly and in small quantities.

Fix ALL® branded products combine unique technology, with market leading brand value. Fix ALL® products offer simple and effective solutions for all sealing, bonding and filling applications, on all materials in all weather conditions. All Fix ALL® products are based on our proprietary **SMX® Hybrid Polymer Technology**.

SOUDASEAL® For over 25 years now, as the original innovator in Europe, Soudal has been at the forefront of developments in Hybrid Polymer technology under the Soudaseal® brand.

SOUDABOND EASY combines two Soudal areas of expertise – PU Foams and adhesives. This is an easy to use PU foam based construction adhesive, which replaces messy and time consuming powder based adhesives.

T-REX® - Soudal's professional adhesive offer includes global brands such as T-REX®, which updates the grab adhesive category with innovative **Fibre Reinforced Technology**. The extended adhesive range includes high quality spray applied contact adhesives, PVA and polyurethane based timber adhesives and cyanoacrylate. These conform to international standards such as DIN EN 204.

SOUDAFOAM is the professional brand of the World's largest manufacturer of polyurethane foams. The SOUDAFOAM brand is a structured range based around applications, with a focus on quality and value for money. The Soudafoam range incorporates many patents including **GENIUS GUN®**, an easy to use, superior alternative to hand applied foams and **CLICK & FIX®**, a safer and faster alternative to traditional gun applied foam.

All gun applied SOUDAFOAM products now incorporate, the unique, state of the art, **DuraValve** system. DuraValve is guaranteed to improve the yield and performance of our products, over a much longer period of time than all other valves and puts an end to all the typical problems associated with PU foams.

We also have a structured and specialist range of decorating sealants and fillers, as well as all the sundries required to start and finish off the job.



Silirub® 2 - Hasselt Kinopolis, Belgium



Soudaseal® 215LM - America's Cup Building, Seville, Spain



Silirub® MA & Soudaseal® 240FC - KBC Bank in Leuven, Belgium

Soudal Building Systems

Soudal develops system based solutions, often combining several of our technologies together. These systems are designed to meet the latest demands from within construction and focus on three mega-trends; energy efficient construction; ecological solutions; and systems focused on safety.

We tackle the fundamental issues around modern construction; combining excellent energy performance and airtightness with cost effectiveness with a whole range of Airtight Construction Systems designed for weatherproofing different interfacing parts of the building envelope; window and door connections, façade connections, roofing connections, connections between walls and floors and even within the different elements used in the fabrication of windows and doors. At the heart of these systems is Soudal Window System - SWS®.



SMX® 506 - PPL in Warsaw, Poland

The **Window Fabrication Range** includes products such as Soudabond 641 and 642. These are used for the structural bonding of aluminium window and door frames.

The **Glass & Glazing Range** keeps pace with innovations, such as the introduction of self-cleaning glass. Our SMX® 506 is fully compatible with all self-cleaning glass brands and has been used on large commercial projects such as PPL in Warsaw, Poland.

The **High Temperature Range** contains products such as Firecement HT which can withstand sustained temperatures as high as 1,500 Celsius.

The **Fire Range** includes products which conform to rigorous international and local standards such as the new EN1366-4 and BS476 part 20. Sealant, filling and adhesive technologies are combined to form various passive fire protection systems,

safeguarding against the spread of fire and heat, for up to 4 hours.

The **Roofing & Ducting Range** brings together several Soudal technologies: waterproofing, bonding and sealing.

The **Flooring Range** is used for the technically demanding application of bonding wooden parquet flooring. SMX®-30 PLUS adhesive has been developed for professional flooring contractors and copes with all types and sizes of wood and subfloors, even with under-floor heating. SMX®-30 PLUS is produced using SMX® Hybrid Polymer Technology.



Soudaseal® 215LM -
Gallo-Roman Museum,
Tongeren, Belgium

The **Cleaning Range** includes products for cleaning hands, tools, and substrates such as glass and PVCu. Also available are products for the safe removal of unwanted sealants, adhesives and PU foam.

The professional range also includes a selection of lubricating and engineering aerosols.

Soudal DIY & Trade Ranges

Our DIY offer is focused around our **Express** and **Fix** Ranges. These ranges are focused on offering premium quality solutions to sealing, bonding and filling. These are all quick and easy to use. All products are very easily identifiable as they are task specific, making the correct selection of product a simple process. These are market leading products within the DIY sector.

Our DIY and Trade PU foams all utilise **GENIUS GUN®** which is the ideal application system for PU Foam. The combination of professional quality products with easy usability is an ideal solution.

The **Trade Range** from Soudal is a market leading range of sealants, foams and adhesives for all serious trades. This range is aimed at completing all jobs as quickly and easily as possible, with great value for money and guaranteed reliability. All products are grouped together by application or trade area and conform to the highest international quality standards.

The **Automotive Range** contains products for body repair, sealing, bonding and coating of vehicle bodies and components.

The **Bike Range** has been developed with our World Tour Cycling team and contains professional quality products for cleaning, assembling, maintaining and lubricating of all types of bikes. The choice of winners.

SEALING

Soudal Window System - SWS®	
Soudaseal 215 LM	10
Soudafoam Window & Door SWS	11
Acryrub SWS	11

Neutral Cure Sealants

Silirub 2	12
Silirub LMN	12
Silirub LM	13
Silirub N	13
Silirub AL	14
Silirub COLOR	14

Sanitary Sealants

Soudaseal Cleanroom	16
Stay Fresh	16
Silirub 2S	16
Silirub 1	17
Silirub S	17
Silirub A	17

Sealant Ancillaries & Tools

Soudaband PRO BG 1	18
Backer Rods	18
Winbag	18
Cartridge Cutter	18
Applicator Tools	19
Silicone Remover	19
Twisty Nozzles	19

SEALING & BONDING

Fix ALL®

Fix ALL Flexi	22
Fix ALL Crystal	22
Fix ALL High Tack	23
Fix ALL High Tack Invisible	23
Fix ALL X-Treme Power	24
Fix ALL Turbo	24

Hybrid Polymers

Soudaseal 240 FC	26
Soudaseal 250 XF	26
Soudaseal 270 HS	26
Soudaseal MS Clear	26
Soudaseal High Tack	27
Soudaseal Supertack	27
Soudaseal SL	27
Soudaseal 2K	27

Polyurethane Polymers

Soudaflex 20 LM	28
Soudaflex 40 FC	28
Soudaflex JGS	28
Aquaswell	28
Soudaflex 33 SL	29
Soudaflex 36 FL	29

Surface Preparation & Primers

Primer 100	30
Primer 150	30
Alu-Prep	30

BONDING

Soudabond Easy

Soudabond Easy	33
----------------------	----

T-REX®

T-REX Solvent Based.....	35
T-REX Solvent Free.....	35

Construction Adhesives

Spray Contact Adhesive 370 SP	36
Ergogrip Gun	36
Flexible Hose	36
Spray Nozzle	36
Adhesive Roller	37
Dissolver SP	37
Cleaning Adaptor	37
Spray Contact Adhesive 270 SP	37
Contact Adhesive 170 TX	38
Contact Adhesive 140 LQ	38
Fix ALL Floor & Wall	38
Superglue MV	39
Superglue HV	39
Mitre-Kit	39
Superglue Activator	39

Timber Adhesives

PRO 45P	40
PRO 40P	40
Purocol Express	40
Purocol	40
PU Construct	41
PRO 30D	41
PRO 20D	41
PRO 10D	41

FILLING

PU Foam - Windows & Doors

Window & Door XTRA	44
Window & Door	44
Window & Door Combibox	44

PU Foam - Gap Filling

Gap filler XTRA	45
Gap Filler	45
Gap Filler Combibox	45

PU Foam - Specialist

One Shot	46
SMX®	46
Express	46

Cleaners, Tolls & Ancillaries

Gun & Foam Cleaner	46
Foam Guns	47
Foam Remover	47
PU Foam Nozzles	47

DECORATING SEALANTS & FILLERS

Flexible Fillers

Acryrub	48
Acryrub UK	48
Dec Caulk	48
Transpacryl	48

Specialist Fillers

Repa-cryl D	49
Soudafill Light	49
PVCu Gap Filler	49

AIRTIGHT CONSTRUCTION

Window Connections SWS

Soudabond Activ PLUS - BG1 + BGR .	50
SWS Inside Tape	51
SWS Outside Tape	51
Soudafoil 330D	51
Soudafoil 360H	51

Façade Cladding

Soudaseal EPDM	52
EPDM Membrane Fix	52
EPDM Membrane	52

Roofing

Vapourseal	53
Soudatape Connect	53
Soudatape Flex	53
Soudatape Façade	53

Walls, Floors & Windows

Soudatight LQ Liquid	54
Soudatight Geotextile	54
Soudatight SP Sprayable.....	54
Soudatight SP Gun	54
Soudatight SP Gun Applicator.....	55
Soudatight SP Nozzle Applicator.....	55
Butyband Fleece	55
Cox Jetflow 3 Applicator Gun	56
Cox Jetflow 3 Applicator Nozzles	56

Window Fabrication

Soudatherm SFI 600P	57
Soudatherm SFI 600P Nozzle	57
Soudatherm SFI 600P Gun	57
Soudatherm SFI 600P Multi Gun	57
Soudatherm SFI 600P Trolley	57

WINDOW FABRICATION RANGE

Soudabond 642 DUO	58
Soudabond 641	58
Soudabond Duo Gun	58
Aluseal	59
Surface Cleaner	59
Surface Activator	59
Activator Spray 601	59

GLASS & GLAZING RANGE

Soudaseal Mirror	60
SMX 506	60
Silirub AQ	60
Universal Putty	60

HIGH TEMPERATURE RANGE

Silirub HT-N	61
Silirub HT-A	61
Firecement HT	61

FIRE RANGE

Firesilicone B1 FR	62
Firecryl FR	62
Soudafoam FR	63
Soudaseal FR	63

ROOFING & DUCTING RANGE

Soudatherm Roof 330	64
Soudatherm Roof 330 Gun	65
Soudatherm Roof 330 Hose	65

Cleaning Adapter Ring	65	DIY RANGE		Grip All Solvent Free	97
Soudatherm Roof 330 Back Pack	65	Express Range Sealants		AUTOMOTIVE RANGE	
Soudatherm Roof 250	66	Colourseal	82	Body Repair	
Soudatherm Roof 250 Combibox	66	General Purpose Silicone	82	Metal Plastics	98
Soudatherm Roof 170	67	Window & Door Silicone	82	Hardeners	99
Butyrub	68	Decorators Sealant	82	Dispenser System	99
Soudafalt	68	Kitchen Sealant	83	Spray Filler	99
Aquafix	68	Bathroom & Shower Silicone	83	Celluplast	99
Soudalead	68	Roof & Gutter	83	Poly Liquid	100
Waterstop	69	Natural Stone	83	Fibreglass Matt	100
Butyband	69	Express Range Premium DIY Foams		Polyfiber	100
Soudaduct	69	Building Adhesive	84	Polyfiber Clear	100
FLOORING RANGE		Plasterboard Adhesive	84	Polysset	100
SMX-30 PLUS	70	Insulation Foam	85	Sealants, Adhesives & Coatings	
MS-30 PLUS	70	Gap Filling Foam	85	Carbond 940 FC	101
MS-20 PLUS	70	DIY Special Application Adhesives		Carbond 955 DG	101
SMX-15 P	71	Green Fix	86	Carbond 955 DG Cleaner/Activator	101
MS-25 P	71	Pool Fix	86	Carbond 955 DG Primer	101
LVT Premium Adhesive	71	Metal Fix	87	Gasket Seal	101
PU-20P	72	Zinc Fix	87	Carjoint	102
SV-15P	72	Mirror Fix	88	Carsealer	102
DS-10P	72	REPAIR EXPRESS RANGE		MS Seam Sealer	102
Trowels	72	Repair Express Plaster	89	MS Seam Sealer Gun	102
WBPR-11P	73	Repair Express Cement	89	Connection Ring	102
WBPR-21P	73	TRADE RANGE		Soudafloor SL2	102
EPR-31P	73	Construction		Anti-Corrosion	
Parquet & Timber Sealant	73	Building Silicone	90	Underbody Protection	103
CLEANING RANGE		Multi-Purpose Silicone	90	Anti-Gravel	103
Dust Sheets	75	Decorators Caulk	90	Incoat ML	103
Stair-Runner	75	Gap Filler Expanding Foam	91	Incoat ML-Wax	103
Tissue Rolls	75	Foam Cleaner	91	Pneumatic Coating Gun	103
Tarpaulins	75	Lightweight Gap Filler	91	BIKE RANGE	
PVCu Frame Cleaner	76	Sanitary		Cleaners	
Frame & Glass Cleaner	76	Bathroom & Kitchen Silicone	92	Bike Cleaner	104
PVCu Cream Cleaner	76	Sanitary Silicone	92	Chain Cleaner Genius Spray	104
Glass & Mirror Cleaner	76	Pipe & Plumbing Expanding Foam	92	Mud Remover	105
Swipex Wipes	76	Sealing Strips	92	Disc Cleaner	105
Swipex Hand Cleaner	76	Glazing		Protect & Polish	105
Cleaner & Degreaser	77	Exterior Frame Sealant	93	Bike Wipes	105
Sealant Remover	77	Interior Frame Sealant	93	Lubrication	
Adhesive Remover	77	Glazing Silicone	93	Dry Wax	106
Multi Cleaner	77	Window & Door Expanding Foam	93	Dry Weather Lubricant	106
Brake Cleaner	77	Roofing		Wet Weather Lubricant	106
LUBRICATING AEROSOLS		Lead Sheet Sealant	94	All Weather Lubricant	106
Vaseline Spray	78	All Weather Sealant	94	Assembly Paste	107
Silicone Spray	78	Roofing & Gutter Sealant	94	Carbon Assembly Paste	107
PTFE Spray	78	Roof & Insulation Expanding Foam	94	Silicone Paste	107
White Grease	78	Fire		Bike Box	107
Multi-Spray	78	B1 Fire & Acoustic Expanding Foam	95	MARKETING MATERIAL	
ENGINEERING AEROSOLS		B2 Fire & Acoustic Expanding Foam	95	Marketing Material	108-111
Zinc Spray (Matt)	79	Adhesives		TECHNICAL INFORMATION	
Zinc Spray (Shiny)	79	5 Min D4 Wood Adhesive Liquid	96	Guide to CE Marking	114-115
Contact Spray	79	30 Min D4 Wood Adhesive Liquid	96	Application Guide	116-117
Degrip All	79	5 Min D4 Wood Adhesive Gel	96	Product Information	118-133
Cutting Oil	79	30 Min D4 Wood Adhesive Gel	96	RAL Color Product List	134-135
GENIUS SPRAY AEROSOLS		Water Resistant Wood Glue	97		
Protect All	81	Mitre-Kit/Superglue	97		
Lubricate All	81	Grip All	97		
All-in-One	81				
Clean All	81				
Degrip All	81				



Product Guide


THE SOUDAL WINDOW SYSTEM

The professional window joint system SWS® is a combination of several products which provide a long lasting weather tight seal between windows and doors and the building envelope. These products when used in a system have improved performance in terms of thermal and acoustic properties and are fully airtight.


SWS® can be used for new build and renovation and is compatible with all types of frame materials: aluminium, wood and PVCu. SWS® also offers solutions for passive houses and timber framed houses.


SWS® has been independently tested in various setups. A typical system set-up is Soudaseal 215 LM providing the flexible sealant on the exterior of the building with Soudafoam Window & Door SWS providing the thermal and acoustic insulation element and Acryrub SWS as the flexible paintable sealant on the interior of the joint.

When properly installed SWS® offers:

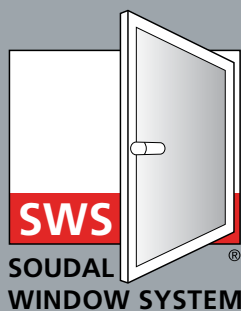

- ◆ SUPERIOR THERMAL & ACOUSTIC INSULATION
- ◆ GUARANTEED AIRTIGHTNESS
- ◆ LONG-TERM WEATHER RESISTANCE

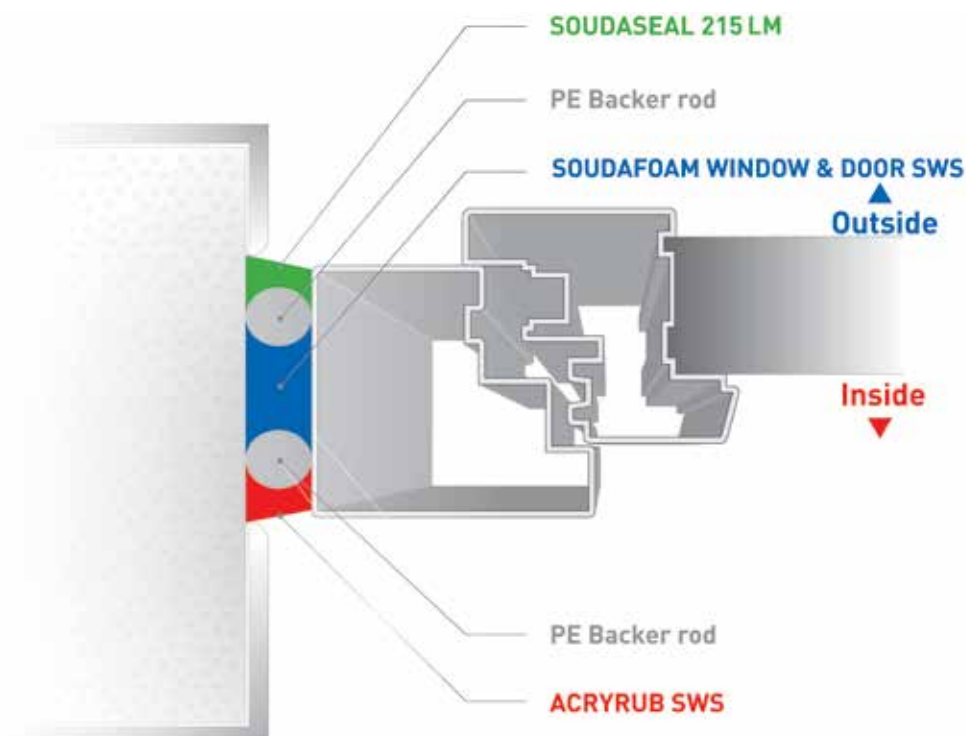



SODASEAL® 215 LM

DESCRIPTION

PREMIUM QUALITY low modulus hybrid polymer sealant. Odourless. Extended open time versus silicones to allow longer tooling of product. 100% Hybrid Polymer sealant, no shrinkage. Primerless adhesion on nearly all common construction materials such as plastics, masonry, metals and wood - even when surfaces are damp. Can be used on sensitive metals such as copper and lead. Non-staining when applied on natural stone substrates, with no hydrophobic effect. No bubble formation within the sealant when applied on damp surfaces. High performance mechanical properties. Colour stable and UV resistant. Free of harmful chemicals - isocyanates, solvents, halogens and acids. Paintable with all water-based paints. Excellent weathering resistance in all climates. Easy to apply, even at low temperatures. Airtight when used as part of Soudal Window System - SWS®.

APPLICATIONS

Construction and industrial sealing applications. Perimeter sealing of all window and door frame substrates – PVCu, aluminium and wood. Sealing of roofline and drainage systems. Sealing of expansion and connection joints in the building industry, including natural stone. Roofing seals including lead, copper, roofing slates and fibre-cement. Industrial applications: coated metals, anodized aluminium, stainless steel. HVAC ducting, pipework and drainage joints. General maintenance and sealing.

- Low modulus hybrid polymer sealant
- Virtually odourless
- 100% hybrid polymer with no extension
- Free of silicone, solvents, isocyanates, halogens & acid
- Primerless adhesion, even on damp surfaces
- Independently tested to ISO 11600 F 25 LM
- Extensive colour range, including RAL® CLASSIC colours
- Over-paintable with water-based paints
- Airtight when used as part of Soudal Window System - SWS®

OPTIONS



SODASEAL® HYBRID POLYMER VERSUS SILIRUB® SILICONE PERFORMANCE

CHEMISTRY & MECHANICAL PROPERTIES

PRODUCT NAME	SILIRUB 1	SILIRUB 2	SODASEAL 215 LM
CHEMISTRY	ACETOXY SILICONE	NEUTRAL SILICONE	HYBRID POLYMER
TYPE	LMA	LMN	LMN
ODOUR	VINEGAR	LOW	NONE
EXTERIOR & INTERIOR USE – EN15651-1	✓	✓	✓
COLD CLIMATE – EN15651-1	✓	✓	✓
MOVEMENT CLASS – EN15651-1	F 25 LM	F 25 LM	F 25 LM
MODULUS – EN15651-1	LOW MODULUS	LOW MODULUS	LOW MODULUS
SKINNING TIME, APPROX	5-10 MINUTES	5-10 MINUTES	10-20 MINUTES
SUBSTRATE COMPATIBILITY			
WOOD	✓	✓	✓
ALUMINIUM	✓	✓	✓
SENSITIVE METALS – LEAD, COPPER	X	✓	✓
PVCu	X	✓	✓
NATURAL STONE – NON-STAINING	X	X	✓
DAMP SURFACES	X	X	✓
OTHER IMPORTANT PROPERTIES			
AIRTIGHTNESS	X	X	SWS® SYSTEM
OVER-PAINTABLE	X	X	✓



SOUDAFOAM WINDOW & DOOR SWS

DESCRIPTION

AIRTIGHT premium quality polyurethane expanding foam filler for use around windows & doors. Recommended for all A, A+ and A++ windows and doors. Vastly improved thermal and insulation properties. Totally airtight after curing. The product is highly flexible once cured, based on FLEXIFOAM® Technology, which gives improved durability. Can be used at temperatures of between -10° Celsius to +30° Celsius. One component. Rapid curing. Primerless adhesion on most construction materials. Available in Gun Grade.

APPLICATIONS

Recommended for all A, A+ and A++ windows and doors or any applications where an airtight seal is required. Sealing gaps where improved thermal and acoustic properties are required. Any joint filling which has high and repetitive movement or where vibration resistance is required. Thermal and acoustic insulation around doors and window frames. All seasons application - can be used at temperatures as low as -10° Celsius.

- Polyurethane foam filler
- Airtight: RAL MO-01/1 and DIN 18542 tested
- Highly flexible
- Acoustic rating ISO 717-1: 60 dB
- Thermal conductivity DIN 52612: 34.5mW/mK
- Application temperature range: -10° Celsius to +30° Celsius
- Linear yield FEICA TM1002 - 750ml Gun Grade: 22M
- Gun Grade.

OPTIONS

750ml Gun Grade DuraValve: Blue.



ACRYRUB® SWS

DESCRIPTION

PREMIUM QUALITY acrylic polymer based sealant and filler. Solvent free and virtually odourless. Very easy to apply. Colourfast and waterproof after curing. Can be painted over after curing. Very good adhesion on many porous surfaces. Highly flexible. Very low emissions - EC-1R PLUS label.

APPLICATIONS

Sealing of window sills, skirting boards, architraves, plasterboard, brickwork, etc. Filling of small cracks in plaster. Part of Soudal Window System - SWS®.

- Acrylic polymer sealant and filler
- Highly elastic
- Paintable
- Virtually odourless
- Low emissions - EC-1R PLUS label.
- Conforms to ISO 11600 F 12.5 E




OPTIONS

310ml Cartridge




White



More SWS® products on pages 50-51





SILIRUB® 2

DESCRIPTION

PREMIUM QUALITY low modulus neutral cure silicone sealant. Virtually odourless. Very fast skinning time and final cure. 100% silicone, no shrinkage. Thick-bodied. Excellent toolability. Primerless adhesion on all common construction materials (glass, plastics, masonry substrates, metals and wood). High movement capability. Resistant to UV, rain, snow, ozone and many chemicals. High and low temperature resistance.

APPLICATIONS

Glazing, construction and industrial sealing applications. Perimeter sealing of window and door frames. Sealing of roofline and drainage systems. Weather sealing of aluminium glazing systems, curtain walling and façade panels. Can be used with all types of glass, except self-cleaning types. Bedding of double glazed sealed units in wet glazing applications. Sealing of expansion joints. Roofing seals including lead, roofing slates, and fibre-cement. Industrial applications; coated metals, anodized aluminium, stainless steel. HVAC ducting, pipework and drainage joints. General maintenance and sealing.

- Low modulus neutral cure silicone
- Virtually odourless
- 100% silicone with no extension
- Primerless adhesion on most surfaces
- Independently tested to ISO 11600 F&G 25 LM
- Extensive colour range, including RAL® CLASSIC colours
- Compatible with sealed units

OPTIONS



SILIRUB® LMN

DESCRIPTION


SUPERIOR QUALITY low modulus neutral cure silicone sealant. Virtually odourless. Very fast skinning time and final cure. Thick-bodied. Excellent toolability. Primerless adhesion on all common construction materials (glass, plastics, masonry substrates, metals and wood). High movement capability. Resistant to UV, rain, snow, ozone and many chemicals. High and low temperature resistance.


APPLICATIONS

Glazing, construction and industrial sealing applications. Perimeter sealing of window and door frames. Sealing of roofline and drainage systems. Weather sealing of aluminium glazing systems, curtain walling and façade panels. Can be used with all types of glass, except self-cleaning types. Sealing of expansion joints. Roofing seals including lead, roofing slates, and fibre-cement. Industrial applications; coated metals, anodized aluminium, stainless steel. HVAC ducting, pipework and drainage joints. General maintenance and sealing.

- Low modulus neutral cure silicone
- Virtually odourless
- Primerless adhesion on most surfaces
- Conforms to ISO 11600 F&G 25 LM
- Extensive colour range

OPTIONS





SILIRUB® LM

DESCRIPTION

HIGH QUALITY low modulus, neutral cure silicone sealant. Virtually odourless. Very fast skinning time and final cure. Excellent toolability. Primerless adhesion on all common construction materials. High movement capability. Resistant to UV, rain, snow, ozone and many chemicals.


APPLICATIONS

Glazing, construction and industrial sealing. Perimeter sealing of window, door frame and roofline systems. Can be used in direct contact with all types of glass, except self cleaning types. Sealing of expansion joints. Roofing seals including lead, roofing slates, and fibre-cement. Industrial sealing applications; coated metals, anodized aluminium, stainless steel. HVAC ducting, pipework and drainage joints. General maintenance and sealing.

- Low modulus neutral cure silicone
- Virtually odourless
- Primerless adhesion on most surfaces
- Conforms to ISO 11600 F 12.5 E
- Extensive colour range

OPTIONS

300ml Cartridge



SILIRUB® N

DESCRIPTION



GENERAL PURPOSE low modulus, neutral cure silicone sealant. Virtually odourless. Very fast skinning time and final cure. Excellent toolability. Primerless adhesion on most common construction materials. Resistant to UV, rain, snow, ozone and many chemicals.


APPLICATIONS

Glazing, construction and industrial sealing. Perimeter sealing of window, door frames and roofline systems. Can be used in direct contact with all types of glass, except self cleaning types. Sealing of expansion joints. Roofing seals including lead, roofing slates, and fibre-cement. Industrial sealing applications; coated metals, anodized aluminium, stainless steel. HVAC ducting, pipework and drainage joints. General maintenance and sealing.

- Low modulus neutral cure silicone
- Virtually odourless
- Primerless adhesion on most surfaces
- Extensive colour range

OPTIONS

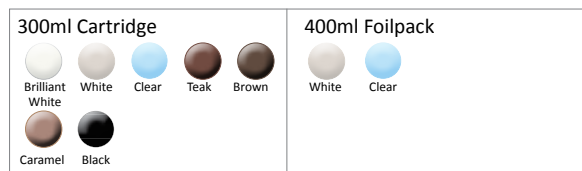



SILIRUB® AL

DESCRIPTION


LOW MODULUS alcoxy neutral cure silicone sealant for use on polycarbonate and other difficult plastic materials. Does not cause stress cracking on polycarbonate. Permanent colour. UV resistant. Stays elastic after curing. Very good adhesion on most traditional construction materials. Virtually odourless. Primerless adhesion.

APPLICATIONS

Sealing between polycarbonate, treated wooden and metal profiles and glass. All usual building joints with high movement. Expansion joints between many different construction materials.

- Low modulus alcoxy neutral cure silicone
- Does not stress crack polycarbonate
- Colourfast and UV resistant
- Conforms to ISO 11600 F&G 25 LM
- Very good adhesion on many materials
- Low odour

OPTIONS

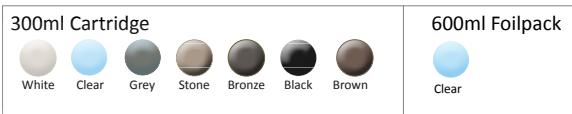

SILIRUB® COLOR

DESCRIPTION

"A UNIVERSE OF COLOUR" - any RAL® CLASSIC colour can be produced. Low modulus, neutral cure silicone. Virtually odourless. Very fast skinning time and final cure. Thick-bodied. Excellent toolability. Primerless adhesion on all common construction materials (glass, plastics, masonry substrates, metals and wood). High movement capability. Resistant to UV, rain, snow, ozone and many chemicals.


APPLICATIONS

Glazing, construction and industrial sealing applications. Perimeter sealing of windows and doors. Sealing of roofline and drainage systems. Weather sealing of aluminium glazing systems, curtain walling and façade panels. Can be used with all types of glass, except self-cleaning types. Sealing of expansion joints. Roofing seals including lead, roofing slates, and fibre-cement. Industrial applications; coated metals, anodized aluminium, stainless steel. HVAC ducting, pipework and drainage joints. General maintenance and sealing.

- Low modulus neutral cure silicone
- Any RAL® CLASSIC colour can be produced
- Virtually odourless
- Primerless adhesion on most surfaces
- Conforms to ISO 11600 F&G 25 LM

OPTIONS

300ml Cartridge
Any RAL® CLASSIC Colour
Full Silirub COLOR product list available on pages 134-135



Silirub[®] color

A tailored service offered from Soudal


Silirub Color is a high quality neutral cure silicone. It has been specially developed for colour matching using the RAL[®] Colour system.

- Any RAL[®] Classic colour can be produced
- Virtually odour free
- Low modulus neutral cure
- Primerless adhesion on most surfaces
- UV resistant
- Conforms to ISO 11600 F&G 25 LM



**SOUDAL**

Scan here to
visit our website



Proud sponsor of

LOTTO
SOUDAL 
Belgian Cycling Project



CE	14 NB0074
	SOUDAL DoP 230742
EN15651-1 F-EXT-INT-20HM EN15651-3 XS1 EN15651-4 PW-INT	

SOUDASEAL® CLEANROOM

DESCRIPTION

HYBRID POLYMER based cleanroom sealant and adhesive. Outstanding bond strength and mechanical properties on nearly all surfaces. Extrudes easily, even at low temperatures. Colour stable. UV-resistant. Free of isocyanates, solvents, halogens and acids. Can be painted with all water based paints. No staining of porous materials such as natural stone, granite, marble, etc.

APPLICATIONS

Specialist sealing and bonding applications in critical surroundings (hospitals, laboratories, pharmaceutical industry, computer areas) and in food safe applications. Sealing in environments where food is handled and stored (food containers, cold store installations, food industry, etc).

- Hybrid polymer sealant and adhesive
- Food safe
- Tested according to FDA regulations CFR 21 & 177.2600 (e)
- Odourless
- Environmentally safe
- XS1 fungicide

OPTIONS

290ml Cartridge



White



STAY FRESH

DESCRIPTION

THE ULTIMATE ANTI-MOULD AND FOOD SAFE SEALANT. Neutral cure silicone. Contains powerful anti-fungal and anti-biocide agents. Virtually odourless. Very fast skinning time and final cure. 100% silicone, no shrinkage. Thick-bodied. Primerless adhesion on all sanitary materials, including plastics. Highly elastic. Resistant to UV, rain, snow, ozone and many chemicals. High and low temperature resistant.


APPLICATIONS

Sealing sanitary, construction and industrial applications where long term mould protection and/or food contact is required. Sealing in all areas prone to high humidity - bathrooms and kitchens. Sealing of all sanitary ware including baths, basins, showers, toilets and glazed tile surrounds.

- Low modulus neutral cure silicone
- Food Safe & Virtually odourless
- Lifetime guarantee
- 100% silicone with no extension
- Conforms to ISO 11600 F&G 25 LM
- XS1 fungicide

OPTIONS

300ml Cartridge



Ice White

Clear

Ivory



SILIRUB® 2S

DESCRIPTION

FOOD SAFE, low modulus neutral cure, sanitary silicone. Contains a powerful anti-fungal agent. Virtually odourless. Very fast skinning time and final cure. 100% silicone, no shrinkage. Thick-bodied. Primerless adhesion on all sanitary materials, including plastics. Highly elastic. Resistant to UV, rain, snow, ozone and many chemicals.

APPLICATIONS

Sealing sanitary, construction and industrial applications where food contact is required. Container, cold-storage, air conditioning, bathroom, kitchen and other areas prone to high humidity. Sealing of all sanitary ware. Sealing in areas of high humidity.

- Low modulus neutral cure silicone
- Food safe
- Virtually odourless
- 100% silicone with no extension
- Primerless adhesion on most surfaces
- Conforms to ISO 11600 F&G 25 LM
- XS1 fungicide

CE	14 NB0757
	SOUDAL DoP 230003
EN15651-1 F-EXT-INT-CC-25LM EN15651-2 G-CC-25LM EN15651-3 XS1	

OPTIONS

300ml Cartridge



Brilliant White

White

Clear

Light Ivory

Grey

Light Grey

Jasmine

Alu White

Grey White

Transparent Grey

Silver Grey

Concrete Grey

Bahama Beige

Cream White



CE	14 NB0757
	SOUDAL DoP 230397
EN15651-1 F-EXT-INT-CC-25LM EN15651-2 G-CC-25LM EN15651-3 XS1	

SILIRUB® 1

DESCRIPTION

PREMIUM QUALITY low modulus, acetoxy silicone sealant. 100% silicone, no shrinkage. Contains powerful anti-fungicidal agents to restrict mould growth. Thick-bodied formulation. Excellent toolability. Primerless adhesion on many common construction materials (glass, ceramic, porcelain, metals and wood). Resistant to weathering, chemicals and high and low temperatures.

APPLICATIONS

Sanitary, construction and industrial applications. Sealing in areas prone to high humidity - bathrooms and kitchens. Sealing of all traditional sanitary ware including baths, basins, showers, toilets and glazed tile surrounds. Perimeter sealing of wooden window and door frames. Glass to glass sealing joints. Industrial applications; coated metals, anodized aluminium, stainless steel. General maintenance sealing.

- Low modulus acetoxy cure silicone
- 100% silicone with no extension
- Primerless adhesion on traditional materials
- Conforms to ISO 11600 F&G 25 LM
- XS1 fungicide

OPTIONS

300ml Cartridge



CE	14 NB0757
	SOUDAL DoP 230117
EN15651-1 F-EXT-INT-12.5E EN15651-2 G EN15651-3 S1	

SILIRUB® S

DESCRIPTION

GENERAL PURPOSE acetoxy sanitary silicone sealant. Mould resistant. Primerless adhesion on many common construction materials (glass, ceramic, porcelain, metals and wood). Resistant to weathering, chemicals and high and low temperatures.

APPLICATIONS

Sanitary, construction and industrial applications. Sealing in areas prone to high humidity - bathrooms and kitchens. Sealing of all traditional sanitary ware including baths, basins, showers, toilets and glazed tile surrounds.

- Acetoxy cure sanitary silicone
- Primerless adhesion on traditional materials
- Conforms to ISO 11600 F 12.5 E
- S1 fungicide

OPTIONS

300ml Cartridge



CE	14 NB0074
	SOUDAL DoP 230881
EN15651-1 F-EXT-INT EN15651-2 G EN15651-3 S1	

SILIRUB® A

DESCRIPTION

GENERAL PURPOSE acetoxy silicone sealant. Mould resistant. Primerless adhesion on many common construction materials (glass, ceramic, porcelain, metals and wood). Resistant to weathering, chemicals and high and low temperatures.


APPLICATIONS

Sanitary, construction and industrial applications. Sealing in areas prone to high humidity - bathrooms and kitchens. Sealing of all traditional sanitary ware including baths, basins, showers, toilets and glazed tile surrounds. Perimeter sealing of wooden window and door frames. Glass to glass sealing joints. Industrial applications; coated metals, anodized aluminium, stainless steel. General maintenance sealing.

- Acetoxy cure silicone
- Primerless adhesion on traditional materials
- S1 fungicide
- Extensive colour range

OPTIONS

295ml Cartridge



Soudaband Pro BG 1



DESCRIPTION
 PRE-COMPRESSED open cell polyurethane foam sealant tape. Used for the sealing, insulating and weather proofing of façades joints. The tape is impregnated with an adhesive and can be used without primer. Weather resistant to at least 600Pa. Matches the requirements of DIN 18542: 2009, class BG1. Conforms to

DIN 4102, class B1. Fully UV and rain resistant. Supplied in various roll lengths and widths. Virtually odourless. After application the tape expands to fill gaps and also adapts to uneven surfaces. Provides long term thermal and acoustic insulation.

APPLICATIONS

Suitable for interior and exterior use. Sealing between aluminium, PVCu and wooden window and door frames and walls. Sealing of concrete, steel, timber, brickwork, blockwork and prefabricated constructions.

- Pre-compressed open cell polyurethane sealant tape
- Conforms to DIN 18542: 2009, class BG1
- Conforms to DIN 4102, class B1
- Weather resistant to at least 600Pa
- Interior and exterior use

OPTIONS

10/1-2 x 20m	15/2-6 x 12m	30/4-9 x 8m	20/9-20 x 3.3m
15/1-4 x 13m	20/2-6 x 12m	15/5-12 x 5.6m	25/11-25 x 2.6m
20/1-4 x 13m	15/4-9 x 8m	15/6-15 x 4.3m	35/18-34 x 3.3m
12/2-6 x 12m	20/4-9 x 8m	20/6-15 x 4.3m	40/24-42 x 2.6m

BACKER RODS



DESCRIPTION
 POLYURETHANE based open cell backer rods. Supplied in 1M lengths.

APPLICATIONS

Used to control depth and shape of sealant joints and avoid 3 sided adhesion.

- PU based
- Grey colour
- Various diameters

OPTIONS

1M lengths
15mm, 20mm, 25mm, 30mm, 40mm, 50mm

WINBAG



DESCRIPTION
 INFLATABLE air wedge for window and door fixing and lifting tool.

APPLICATIONS

Used for the lifting and positioning of doors and windows, prior to fixing.

- Lifts and positions doors and windows
- Quick and safe

OPTIONS

Pack: 4 Winbags

CARTRIDGE CUTTER



DESCRIPTION
 HIGH QUALITY cartridge cutter.

APPLICATION

Used for cutting cartridges and nozzles safely and quickly.

- Cuts cartridges and nozzles
- Quick and safe

OPTIONS

Single unit

APPLICATOR TOOLS



CARTRIDGE GUN SKELETON

DESCRIPTION

Steel skeleton gun. Soudal dripless system. Suitable for all cartridge applied adhesives, fillers and sealants. Available in 310ml and 400ml sizes. Also available in Cox brand in 400ml.



CARTRIDGE GUN HEAVY DUTY

DESCRIPTION

Heavy duty steel skeleton gun. Soudal dripless system. Suitable for all cartridge applied adhesives, fillers and sealants. Available in 310ml and 400ml sizes.



MANUAL FOIL PACK GUN

DESCRIPTION

Soudal manual foilpack gun. Can be used with all foilpack products. Available in 400ml and 600ml sizes. Also available in Cox brand.

SILICONE REMOVER

DESCRIPTION

TERPENE based, easy to use cleaning gel for the removal of cured silicone sealants. Applied by brush or spatula. Non sagging.

APPLICATIONS

Used to remove all cured silicone sealants, especially on non-porous surfaces. Can also be used with Hybrid Polymer based sealants and adhesives.

- Terpene based
- Works on silicones and hybrid polymers
- Brush applied
- Non sagging
- Fast and effective



OPTIONS

100ml Bottle: Clear

TWISTY NOZZLES

DESCRIPTION

TWISTABLE sealant and adhesive nozzles. Re-sealable after use.

APPLICATIONS

Used with all standard sealant, adhesive and filler cartridges. Useful for sealing, filling and bonding into hard to access areas e.g. around pipes

- Compatible with all standard cartridges
- Fully twistable, up to 90° angle
- Allows access into difficult areas
- Re-sealable



OPTIONS

Pack: 5 nozzles



All you need is...
Fix ALL®.



 750%	 100% transparent	 320 Kg/10cm ²	 320 Kg/10cm ²	 400Kg*	 20 min.
----------	----------------------	------------------------------	------------------------------	------------	-------------



The Fix ALL® range of products from Soudal are the perfect answer to all interior and exterior bonding, filling and sealing jobs. Use on porous, non-porous, wet and humid surfaces, even under water!



The Fix ALL range can be applied on all* common surfaces including:

Bricks	Concrete	Stone	Marble
Granite	Plaster	Wood	MDF
Chipboard	Rockwool	Cork	Ceramics
Laminate	Steel	Glass	Mirror
Copper	Aluminium	Lead	Zinc
Ceramics	Porcelain	Cardboard	PVC
Polystyrene	Polyurethane	Slate	Synthetics

*Not suitable for PE, PP or Teflon.


Friendly to the environment and the user
no solvents, halogens, acids, isocyanates*

- Anti-mould
- Odourless
- Paintable
- Quick & easy



Scan here to visit our website and find out more...



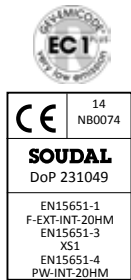

FLEXI

DESCRIPTION

MULTI USE sealant, adhesive and filler with high flexibility. Can be applied in all weather conditions. Internal and external use. Virtually odourless. Primerless adhesion on most construction materials, including wet and damp surfaces. Paintable with most paints. Non-staining on porous natural stones. Contains fungicides - suitable for sanitary applications.

APPLICATIONS

For all bonding, sealing & filling applications in all weather conditions, on most surfaces. Paintable elastomeric sealing and bonding. Bonding & sealing of porous natural stone surfaces such as marble and limestone. Sanitary sealing and bonding - kitchens, bathrooms and showers.

- Multi use
- Primerless adhesion
- Virtually odourless
- All weather use
- Highly flexible
- Mould resistant - XS1 fungicide
- Non staining - conforms to ISO 16938-1
- Conforms to ISO 11600 F 20 HM

OPTIONS

290ml Cartridge	125ml Tube	80ml Tube
 White Black Grey Brown	 White	 White

CRYSTAL

DESCRIPTION

SUPER CLEAR sealant, adhesive and filler. 100% crystal clear. Can be applied in all weather conditions. Internal and external use. Virtually odourless. Primerless adhesion on most construction materials, including wet and damp surfaces. Paintable with most paints. Non yellowing - UV resistant. Contains fungicides - suitable for sanitary applications. Food safe. Highly flexible.


APPLICATIONS


For all bonding, sealing & filling applications where transparency of the final bond or seal is important. Heavy duty bonding and sealing in all weather conditions, on most surfaces. Paintable elastomeric sealing and bonding. Sanitary sealing and bonding - kitchens, bathrooms, showers etc.

- Super clear
- Primerless adhesion
- Virtually odourless
- All weather use
- Highly flexible
- Mould resistant - XS1 fungicide
- Food safe
- Tested according to FDA regulations CFR 21 & 177.2600 (e)

OPTIONS

290ml Cartridge	125ml Tube	80ml Tube
 Crystal Clear	 Crystal Clear	 Crystal Clear





HIGH TACK

DESCRIPTION

SUPER STRONG sealant, adhesive and filler with high initial tack. Can be applied in all weather conditions. Internal and external use. Virtually odourless. Primerless adhesion on most construction materials, including wet and damp surfaces. Paintable with most paints. Non yellowing - UV resistant. Contains fungicides - suitable for sanitary applications. Very high final mechanical properties.

APPLICATIONS

For all bonding, sealing & filling applications where initial grab and final bond strength is important. Heavy duty bonding and sealing in all weather conditions, on most surfaces. Paintable elastomeric sealing and bonding. Bonding of porous natural stone surfaces such as marble and limestone. Sanitary sealing and bonding.

- Super strong
- High initial tack
- Very high final mechanical properties
- Mould resistant - XS1 fungicide
- Primerless adhesion
- Virtually odourless
- All weather use
- Conforms to ISO 11600 F 20 HM

OPTIONS



HIGH TACK INVISIBLE

DESCRIPTION

SUPER STRONG adhesive with high initial tack. Can be applied in all weather conditions. Internal and external use. Virtually odourless. Primerless adhesion on most construction materials, including wet and damp surfaces. Paintable with most paints. Non yellowing - UV resistant. Very high final mechanical properties.

APPLICATIONS

For all bonding where initial grab and final bond strength is important. Heavy duty bonding in all weather conditions, on most surfaces. Paintable elastomeric bonding. Bonding of porous natural stone surfaces such as marble and limestone. Sanitary sealing and bonding.

- Super clear
- Super strong
- High initial tack
- Very high final mechanical properties
- Primerless adhesion
- Virtually odourless
- All weather use

OPTIONS





X-TREME POWER

DESCRIPTION

EXTREME TACK high strength elastomeric adhesive with enhanced mechanical properties. The ULTIMATE in initial grab - 400kg/m². Can be applied in all weather conditions. Internal and external use. Virtually odourless. Primerless adhesion on most construction materials, including wet and damp surfaces. Easy gunnability.

APPLICATIONS

For all bonding applications where initial grab and final bond strength is extremely critical. Heavy duty bonding in all weather conditions, on most surfaces. Bonding of porous natural stone surfaces such as marble and limestone.

- Extreme tack
- Ultimate initial grab - 400kg/m²
- Very high final mechanical properties
- Easy gunnability
- Primerless adhesion
- Virtually odourless
- All weather use

OPTIONS

290ml Cartridge



White

TURBO

DESCRIPTION

SUPER FAST elastomeric adhesive. Rapid strength build up after 20 minutes. Final bond strength after 3 hours. High initial tack. Can be applied in all weather conditions (including wet and damp surfaces), internally and externally. No solvents or odours. Primerless adhesion on most construction materials.

APPLICATIONS

For all elastomeric bonding applications where adhesive build up speed is highly critical or important. Heavy duty bonding and sealing in all weather conditions, on most surfaces. Bonding of porous natural stone surfaces such as marble and limestone.

- Super fast
- Rapid strength build up after 20 minutes
- 3 hours - final bond strength
- Primerless adhesion
- Virtually odourless
- All weather use

OPTIONS

290ml Cartridge



White

125ml Tube



White








FIND THE RIGHT FIX ALL® PRODUCT FOR YOUR APPLICATION!






	ALL Materials (except PE,PP, Teflon)	Sealing	Bonding	Initial Grab	Strength build up/ fast bonding	Crystal Clear/ Invisible
--	--	---------	---------	--------------	---------------------------------------	-----------------------------

ALL BONDING AND SEALING

 FLEXI	★★★★★	★★★★★	★★★	★★	★	
 CRYSTAL	★★★★★	★★★★★	★★★	★★	★	★★★★★
 HIGH TACK	★★★★★	★★★★★	★★★★★	★★★★★	★★	

ALL BONDING

 HIGH TACK INVISIBLE	★★★★★		★★★★★	★★★★★	★★	★★★★★
 X-TREME POWER	★★★★★		★★★★★	★★★★★	★★	
 TURBO	★★★★★	★★	★★★★★	★★★	★★★★★	



SODASEAL® 240 FC

DESCRIPTION

HIGH MODULUS hybrid polymer sealant and adhesive. Chemically neutral and fully elastic. Outstanding bond strength on nearly all surfaces, even when damp. No bubble formation in high temperatures or humid applications. Very easy to tool. Good extrudability even at low temperatures. Good colour stability, weather and UV resistant. Free of isocyanates, solvents, halogens and acids. Can be painted with all water based paints. Contains fungicides - suitable for sanitary applications. Virtually odorless.

APPLICATIONS

Structural bonding which requires elasticity and high end strength. Structural bonding in vibrating constructions. Elastic bonding in car-bodies, buses, trains, caravans and containers. Flooring joints in construction.

- High modulus hybrid polymer sealant & adhesive
- Damp surface adhesion
- Conforms to ISO 11600 F 20 HM
- Over-paintable
- Silicone & isocyanate free
- XS1 fungicide

CE	14
	NB0074
SODAL	
DoP 230267	
EN15651-1	
F-EXT-INT-CC-20HM	
EN15651-3	
XS1	
EN15651-4	
PW-INT-20HM	

OPTIONS

290ml Cartridge	600ml Foilpack
<p>White Grey Black</p>	<p>White Concrete Grey Black</p>



SODASEAL® 250 XF

DESCRIPTION

HIGH MODULUS hybrid polymer sealant and adhesive, with enhanced mechanical properties and extra fast strength build up. Chemically neutral and fully elastic. Outstanding bond strength on nearly all surfaces, even when damp. No bubble formation in high temperatures or humid applications. Very easy to tool. Good extrudability even at low temperatures. Good colour stability, weather and UV resistant. Free of isocyanates, solvents, halogens and acids. Can be painted with all water based paints. Contains fungicides - suitable for sanitary applications. Virtually odorless.

APPLICATIONS

Structural bonding which requires elasticity and higher end strength. Structural bonding in vibrating constructions. Elastic bonding in car bodies, buses, trains, caravans and containers.

- High modulus hybrid polymer sealant & adhesive
- Damp surface adhesion
- Conforms to ISO 11600 F 20 HM
- Over-paintable
- Silicone & isocyanate free
- XS1 fungicide

CE	14
	NB0757
SODAL	
DoP 230743	
EN15651-1	
F-EXT-INT-CC-20HM	
EN15651-3	
XS1	
EN15651-4	
PW-INT-20HM	

OPTIONS

290ml Cartridge	600ml Foilpack
<p>White Grey Black</p>	<p>White</p>



SODASEAL® 270 HS

DESCRIPTION

HEAVY DUTY hybrid polymer elastomeric adhesive with very high mechanical properties, final bond strength and strength build up. Very high initial grab. Extremely durable due to very high Shore A hardness after curing. Free of isocyanates, silicone, or solvent. Can be sanded after cure. Very easy to tool. Colour stable and UV resistant. Can be painted with most industrial paints. Withstands all climatic conditions. "Anti-pick" properties.

APPLICATIONS

For use in elastic structural bonding applications in the car, coach, caravan, marine and aerospace industries where a tough and flexible bond is required. Structural elastic bonding between metal surfaces, coated surfaces and many plastics. Structural bonding in vibrating constructions. "Anti-pick" applications.

- Extreme strength hybrid polymer adhesive
- Extreme mechanical properties
- Damp surface adhesion
- Silicone and isocyanate free
- "Anti-pick" properties

OPTIONS

290ml Cartridge	600ml Foilpack
<p>White Black</p>	<p>White Black</p>



SODASEAL® MS CLEAR

DESCRIPTION

CRYSTAL CLEAR hybrid polymer sealant and adhesive. Chemically neutral and fully elastic. Outstanding bond strength on nearly all surfaces, even when damp. No bubble formation in high temperatures or humid applications. Very easy to tool. Good extrudability even at low temperatures. Good colour stability, weather and UV resistant. Free of isocyanates, solvents, halogens and acids. Can be painted with all water based paints. Contains fungicides - suitable for sanitary applications. Virtually odorless.

APPLICATIONS

Structural bonding which requires elasticity and high end strength, with a crystal clear finish. Structural bonding in vibrating constructions. Elastic bonding in car bodies, buses, trains, caravans and containers.

- Crystal clear hybrid polymer sealant & adhesive
- Damp surface adhesion
- High modulus
- Over-paintable
- Silicone & isocyanate free
- XS1 fungicide

CE	14
	NB0757
SODAL	
DoP 230773	
EN15651-1	
F-INT	
EN15651-3	
XS1	

OPTIONS

290ml Cartridge
<p>Crystal Clear</p>



Soudaseal® HIGH TACK


DESCRIPTION

HIGH TACK hybrid polymer adhesive and sealant. Chemically neutral and fully elastic. Initial tack reduces the need for support. High bond strength and fast cure onto nearly all surfaces, even when damp. No bubble formation in high temperatures or humid applications. Very easy to tool. Good extrudability even at low temperatures. Colour stable and UV resistant. Free of isocyanates, solvents, halogens and acids. Solvent free. Paintable with all water based paints. Contains fungicides - suitable for sanitary applications.

APPLICATIONS

Sealing and bonding in the building and manufacturing industries. Sealing of floor joints and low movement wall joints. Suitable for sanitary applications. Structural bonding in vibrating constructions. Connection joints in sheet metal fabrication. Paintable gap filler and sealant.

- High tack hybrid polymer sealant & adhesive
- Damp surface adhesion
- Conforms to ISO 11600 F 20 HM
- Over-paintable
- Silicone & isocyanate free
- XS1 fungicide



OPTIONS

290ml Cartridge



White Black



Soudaseal® SUPERTACK

DESCRIPTION

SUPER TACK elastomeric hybrid polymer adhesive with extreme initial grab. Chemically neutral and fully elastic. For bonding objects on horizontal or vertical surfaces where high adhesive strength with exceptional initial grab is required. Primerless adhesion on most porous and non-porous surfaces. Flexible and accommodates thermal expansion or vibrations of bonded surfaces. Straightforward application even in adverse conditions. Free of isocyanates, solvents, halogens and acids.

APPLICATIONS

Structural elastic bonding in the building and metal working industry. Structural bonding applications in the automotive industry (cars, coaches, caravans, marine, trains). Elastic bonding of panels, profiles and other common construction substrates.

- Super tack hybrid polymer adhesive
- Virtually odourless
- Solvent, silicone and isocyanate free
- Damp surface adhesion
- Over-paintable

OPTIONS

290ml Cartridge



White Black



Soudaseal® SL

DESCRIPTION

SELF-LEVELLING hybrid polymer sealant and adhesive. Excellent workability. High end strength. Permanently elastic after full cure. Odourless. Paintable with waterbased paints.

APPLICATIONS

Sealing of joints in building and metal work industry. Sealing of overlap joints between panels in automotive applications. Sealing of horizontal joints.

- Self leveling hybrid polymer sealant & adhesive
- Damp surface adhesion
- Virtually odourless
- Solvent, silicone and isocyanate free
- Over-paintable

OPTIONS

600ml Foilpack



Pure White



Soudaseal® 2K

DESCRIPTION

TWO COMPONENT super fast curing hybrid polymer adhesive and sealant. For use in elastical bonding applications where fast curing is required. Fast strength build-up. Fast curing. High performance mechanical properties. Permanently elastic after curing. Does not contain isocyanates, silicone and solvents. Cures without the presence of atmospheric moisture.

APPLICATIONS

Bonding and sealing applications in industrial, automotive, marine, construction and building areas. Bonding between metal surfaces, coated surfaces and many plastics. Elastic bonding applications in car, coach, caravan and train industries where fast curing and strength build up is required. Full surface bonding of non porous (sheet) material and large areas which are not porous enough to let atmospheric moisture through.

- Two component hybrid polymer sealant & adhesive
- Super fast cure speed
- Cures without atmospheric moisture
- Solvent, silicone and isocyanate free
- Virtually odourless
- Static mixer also available

OPTIONS

250ml Cartridge



Grey



SODAFLEX® 20 LM


DESCRIPTION

LOW MODULUS polyurethane based sealant. Very easy to apply. Stays elastic after curing. Very good adhesion on many materials. Excellent resistance to many chemicals. Developed especially for concrete applications. Paintable with some types of paint, after curing.

APPLICATIONS

All usual building joints with high movement. Connection joints between window and door frames and walls. Expansion joints between many different construction materials. Joints with large movement.

- Low modulus polyurethane sealant
- Permanently flexible
- Conforms to ISO 11600 F 25 LM
- Excellent adhesion
- Highly flexible
- Extensive colour range



OPTIONS

600ml Foilpack



SODAFLEX® 40 FC


DESCRIPTION

HIGH MODULUS polyurethane based sealant and adhesive. Very easy application. Stays elastic after curing. Very good adhesion on many materials. Excellent resistance to many chemicals. Developed especially for concrete applications. Paintable with some types of paint, after curing.

APPLICATIONS


Sealing and bonding applications in the manufacturing and construction industries. Structural bondings on materials subject to vibration and movement. Sealing applications including concrete flooring joints.

- High modulus polyurethane sealant & adhesive
- Can be used for flooring joints
- Excellent adhesion
- High bond strength
- Fast curing



OPTIONS

310ml Cartridge



600ml Foilpack



SODAFLEX® JGS


DESCRIPTION

LOW MODULUS polyurethane based sealant with excellent chemical resistance. Resistant to liquid manure and sewage (tested according to DIN 11622-2). Very easy application. Stays elastic after curing. Very good adhesion on many materials.

APPLICATIONS

Sealing and bonding applications in the manufacturing and construction industries. Joint sealing in silos or tanks of liquid manure and biogas. Sealing of overlapping steel segments and bottom joints of steel tanks.

- Low modulus polyurethane sealant
- Excellent chemical resistance
- Conforms to DIN 11622-2
- Resists liquid manure and sewage



OPTIONS

600ml Foilpack



AQUASWELL

DESCRIPTION

POLYURETHANE pipe and cable sealant which swells up in contact with water to create a water and gas tight seal - up to 5 bar (DVGW VP-601). Very good adhesion on concrete, most metals and PVC. Very easy application in both horizontal and vertical applications. Swells up to 450% of its original volume when in contact with water. Stays elastic after curing. Returns to its original shape after swelling.

APPLICATIONS

Water sealing pipe and cable penetrations. Water sealing concrete joints.

- POLYURETHANE pipe and cable sealant
- Water and gas tight up to 5 bar (DVGW VP-601)
- Swells up to 450% of its original volume in contact with water
- Stays elastic after curing
- Returns to its original shape after swelling

OPTIONS

310ml Cartridge



600ml Foilpack





SOUDAFLEX® 33 SL

DESCRIPTION

SELF-LEVELLING polyurethane flooring sealant. Very easy to apply. Stays elastic after curing. Very good adhesion on many materials. Excellent resistance to many chemicals. Developed especially for concrete flooring applications. No bubble formation within sealant as a result of high temperatures or humidity. Non-staining on natural stone and concrete. Resistant to many fuels and other chemicals.

APPLICATIONS

Flooring expansion joints where high movement is expected. Self-levelling up to a maximum slope of 3%. Sealing flooring joints where exposure to fuel and oil is expected e.g. garages. Resistant to splash and spillage contact from hydraulic fluids, lubricants, oils, petrol and many chemicals. Conforms to DIN EN 14187-4, DIN EN 14187-5 and DIN EN 14187-6

- Self-levelling polyurethane flooring sealant
- Permanently flexible
- Conforms to DIN EN 14187-4
- Conforms to DIN EN 14187-5
- Conforms to DIN EN 14187-6
- Non-staining on natural stone and concrete
- Resistant to lubricants, oils, petrol and chemicals

OPTIONS

600ml Foilpack



Concrete
Grey

SOUDAFLEX® 36 FL

DESCRIPTION

PREMIUM QUALITY polyurethane flooring sealant. Very easy to apply. Stays elastic after curing. Very good adhesion on many materials. Excellent resistance to many chemicals. Developed especially for concrete flooring applications. No bubble formation within sealant as a result of high temperatures or humidity. Non-staining on natural stone and concrete. Resistant to many fuels and other chemicals.

APPLICATIONS

Flooring expansion joints where high movement is expected. Sealing flooring joints where exposure to fuel and oil is expected e.g. garages. Resistant to splash and spillage contact from hydraulic fluids, lubricants, oils, petrol and many chemicals. Conforms to DIN EN 14187-4, DIN EN 14187-5 and DIN EN 14187-6

- Polyurethane flooring sealant
- Permanently flexible
- Conforms to DIN EN 14187-4
- Conforms to DIN EN 14187-5
- Conforms to DIN EN 14187-6
- Non-staining on natural stone and concrete
- Resistant to lubricants, oils, petrol and chemicals

OPTIONS

600ml Foilpack



Concrete
Grey



PRIMER 100



DESCRIPTION

UNIVERSAL one part, porous surface primer. Liquid, easy to apply. Suitable for all professional sealants and adhesives based on polyurethane, polysulphide and hybrid polymers.

APPLICATIONS

Priming of expansion joint surfaces. Joint surfaces of porous materials with high water exposure.

- Liquid primer for porous substrates
- Universal use; can be used with polyurethane, polysulphide and hybrid polymers
- One component - easy to use
- Clear

OPTIONS

500ml Flask: Clear

PRIMER 150



DESCRIPTION

UNIVERSAL one part, porous surfaces primer. To be used with silicone sealants, hybrid polymer sealants and adhesives. Liquid, easy to apply.

APPLICATIONS

Priming of expansion joint surfaces. Joint surfaces of porous materials with high water exposure.

- Liquid primer for porous surfaces
- Universal use, can be used with silicones and hybrid polymers
- One component - easy to use
- Clear

OPTIONS

500ml Flask: Clear

ALU-PREP



DESCRIPTION

UNIVERSAL liquid surface activator for use with silicones and hybrid polymers to improve the adhesion on anodized, lacquered and powder coated aluminium. Mild smelling. Fast drying. Compatible with most lacquered surfaces. Suitable for most plastics and metals. Can also be used to clean and remove uncured silicone.

APPLICATIONS

Cleaning of anodized, lacquered and powder coated aluminium surfaces prior to the application of silicones and hybrid polymers.

- Liquid surface activator for aluminium surfaces
- Cleans, degreases and activates
- Works with silicones and hybrid polymers
- One component - easy to use
- Clear

OPTIONS

250ml Flask: Clear

PLEASE SEE PAGE 59 FOR MORE SURFACE PREPARATION & PRIMERS.



>>> p. 59



Proud sponsor of



SOUDAL BOND EASY

Makes life **EASY**

What is it?

A PU Foam Adhesive.


What does it do?

Replaces traditional methods of fixing panels, insulation & dry walls.

14m²

30% faster

750ml = 25kg

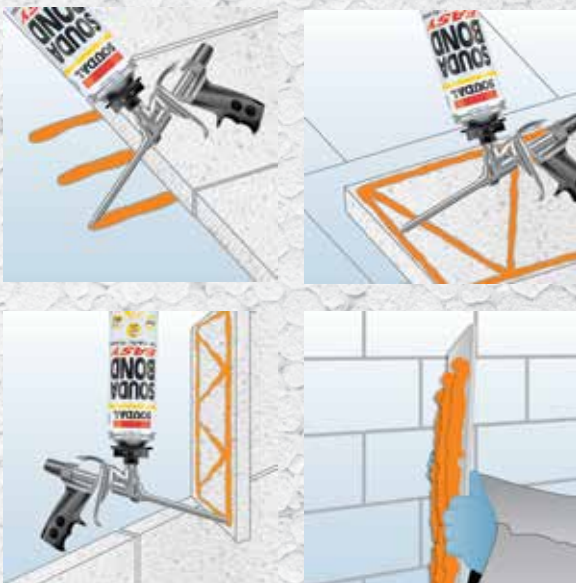

Soudal's UNIQUE Delivery Systems:



SOUDAL

www.soudal.com

LOTTO SOUDAL Belgian Cycling Project



SODABOND EASY

DESCRIPTION

POLYURETHANE foam based, single component, construction adhesive. Quick and easy to use – no mixing required. Replaces traditional powder based adhesives. Used for the bonding of many building materials such as insulation panels, plasterboard and light weight building blocks in non-load bearing applications. Lightweight and easy to transport. Available in Hand Held MEGA ADAPTOR, Genius Gun® MAX and Gun Grade with Dura Valve versions.

APPLICATIONS

Clean, efficient and economical bonding of many types of Insulation panels - polyurethane, phenol, resin foam. Can also be used for bonding polystyrene. Bonding of gypsum plasterboard in dry lining applications. Can be used for bonding non-load bearing walls. Bonds many other building materials such as brick, stone, aluminium, ceramics, MDF, steel, cork, wood and chipboard.

- Single component PU adhesive
- Up to 30% quicker than traditional methods
- Gap-filling capabilities
- No mixing required
- Porous and non-porous materials
- Hand Held, Gun Grade and Genius Gun® MAX versions

OPTIONS

- | |
|--------------------------------------|
| 750ml Gun Grade DuraValve: Orange |
| 750ml Hand Held MEGA ADAPTOR: Orange |
| 750ml Genius Gun® MAX: Orange |





**BIGGER.
FASTER.
STRONGER.**



Soudal

T-Rex is an ultra-strong gap filling grab adhesive with extremely high initial grab, using Soudal's unique FIBRE REINFORCED TECHNOLOGY which improves strength and gap filling properties.



T-REX® SOLVENT BASED

DESCRIPTION

SOLVENT BASED gap filling construction adhesive, with Soudal's unique Fibre Reinforced Technology. High initial grab - 125kg/m². Very high final bond strength. Compatible with most building materials, porous and non-porous. Direct application onto one surface. Moisture resistant. Replaces screws and nails.

APPLICATIONS

Bonding of heavy materials such as wooden skirting boards, window sills, plaster and plasterboard. Bonding of carpet grippers, edge strips and stair nosings. Bonding of wall and floorboards, window frames and partitions. Repair of loose tiles.

- Solvent based construction adhesive
- High initial grab - 125kg/m²
- Gap filling properties
- Fast strength build up
- Porous and non-porous materials
- Fibre Reinforced Technology

OPTIONS

310ml Cartridge



Beige

T-REX® SOLVENT FREE

DESCRIPTION

SOLVENT FREE gap filling construction adhesive, with Soudal's unique Fibre Reinforced Technology. Extremely high initial grab - 300kg/m². Very high final bond strength. Compatible with most building materials, but especially effective on porous surfaces. Direct application onto one surface. Moisture resistant. Replaces screws and nails. Works on materials which are sensitive to solvents e.g. polystyrene. Virtually odourless.

APPLICATIONS

Bonding of heavy materials such as wooden skirting boards, window sills, plaster and plasterboard. Bonding of carpet grippers, edge strips and stair nosings. Bonding of wall and floorboards, window frames and partitions. Repair of loose tiles. Fixing polystyrene and other soft construction materials.

- Solvent free construction adhesive
- Extreme initial grab - 300kg/m²
- Gap filling properties
- Virtually odourless
- Porous and solvent sensitive materials
- Fibre Reinforced Technology

OPTIONS

310ml Cartridge



White



SPRAY CONTACT ADHESIVE 370 SP



DESCRIPTION

SPRAYABLE ready to use, polychloroprene contact adhesive in large format canister. No need for electricity or air compressor. Quick and easy to apply with the ErgoGrip gun. No visible irregularities after application, due to fine nozzle spray (pebble style). Fast adhesion and short drying time. High temperature resistance, up to +115° C. Excellent moisture resistance. Does not contain toluene or methylene chloride. Pink and transparent colours available.

APPLICATIONS

For bonding many materials - laminates, plywood, laminated boards, decorative panels onto MDF, lightweight panels, chipboard, rubber, leather, artificial leather, cork and plastics. Bonding of decorative paper, PVC foil and other decorative foils onto chipboard, metals and MDF.

- Sprayable contact adhesive
- Fast drying
- Fast strength build-up
- High bond strength
- Suitable for most materials
- High temperature resistance, up to +115° C.
- Toluene and methylene chloride free

OPTIONS

22.1L Canister: Transparent, Pink.

ERGOGRIP GUN



DESCRIPTION

PROFESSIONAL quality, spray applicator gun to use with Soudal canister based contact adhesives. Heavy duty. Can be used with various spray nozzles, depending on application.

APPLICATIONS

Used to apply Soudal canister based contact adhesives.

- Professional quality spray applicator gun
- Used with Soudal canister based contact adhesives
- Heavy duty
- Can be used with various spray nozzles

OPTIONS

Gun

FLEXIBLE HOSE



DESCRIPTION

PROFESSIONAL quality, spray applicator hose to use with Soudal canister based contact adhesives. Heavy duty. Flexible.

APPLICATIONS

Used to apply Soudal canister based contact adhesives.

- Professional quality spray applicator hose
- Used with Soudal canister based contact adhesives
- Flexible
- Heavy duty

OPTIONS

Hose

SPRAY NOZZLES



DESCRIPTION

PROFESSIONAL quality, spray applicator nozzles used with ErgoGrip gun to apply Soudal canister based contact adhesives. Heavy duty. Different nozzles used for different application distances - 15°, 40° or 65°.

APPLICATIONS

Used with ErgoGrip applicator gun to apply Soudal canister based contact adhesives.

- Professional quality spray applicator nozzles
- Used with ErgoGrip applicator gun
- Different spray pattern angles available - 15°, 40° or 65°
- Heavy duty

OPTIONS

Nozzle: 15° (extra small), 40° (small), 65° (medium)

ADHESIVE ROLLER



DESCRIPTION

PROFESSIONAL quality, roller used with Soudal canister based contact adhesives to ensure perfect adhesion between materials. Available in different lengths - 75mm, 120mm.

APPLICATIONS

Used with Soudal canister based contact adhesives after application to ensure perfect adhesion between bonded materials.

- Professional quality roller
- Used with Soudal canister contact adhesives
- Available in different lengths
- Heavy duty

OPTIONS

Roller: 75mm length, 120mm length

DISSOLVER SP



DESCRIPTION

SOLVENT BASED aerosol spray applied cleaner and dissolver for use with Soudal sprayable contact adhesives. Used to clean ErgoGrip guns, Spray Nozzles and Flexible Hoses. Attached to hose using Cleaning Adaptor ring. Dissolves and cleans contact adhesive.

APPLICATIONS

Used for the cleaning of Soudal sprayable contact adhesives from ErgoGrip gun, hoses and nozzles.

- Solvent based cleaner and dissolver
- Quick & easy to use
- Cleans guns, hoses and nozzles
- Aerosol applied

OPTIONS

500ml Aerosol: Clear

CLEANING ADAPTOR



DESCRIPTION

METAL cleaning adaptor ring used with Dissolver SP to clean ErgoGrip gun, hoses and nozzles. Dissolver SP screws into ring prior to use.

APPLICATIONS

Used for the cleaning of Soudal sprayable contact adhesives from ErgoGrip gun, hoses and nozzles.

- Metal cleaning adaptor ring
- Quick & easy to use with Soudal Dissolver SP
- Cleans guns, hoses and nozzles
- Heavy duty

OPTIONS

Cleaning Adaptor: 3 Pack

SPRAY CONTACT ADHESIVE 270 SP



DESCRIPTION

SPRAYABLE ready to use, professional quality, contact adhesive in aerosol format, based on synthetic rubbers and resins. High bond strength. Fast drying process. Fast strength build-up. Wide application area. Excellent adhesion to many materials. Low consumption rate. Doesn't contain toluene and methylene chloride. Transparent.

APPLICATIONS

For bonding a broad range of materials. Bonding of most common materials such as rubber, cardboard, textiles, felts, leather, artificial leather, cork and plastics. Bonding of decorative paper, PVC foil and other decorative foils onto chipboard and MDF.

- Aerosol solvent based contact adhesive
- Fast drying
- Fast strength build-up
- High bond strength
- Suitable for most materials
- Toluene and methylene chloride free

OPTIONS

500ml Aerosol: Transparent



CONTACT ADHESIVE 170 TX

DESCRIPTION
THIXOTROPIC solvent based neoprene contact adhesive. Ready to use. Fast drying. High adhesive strength. Damp resistant. Easy to apply.

APPLICATIONS
Bonding of most common materials such as rubber, leather, artificial leather, cork and plastics to several substrates or to themselves. Bonding of synthetic panels and worktops to wood, metal, board etc. Traditional joinery bonding. Vertical applications.

- Thixotropic neoprene adhesive
- Solvent based
- Fast drying
- Rapid strength build up
- Damp resistant
- Adhesion onto many materials
- Ideal for vertical surfaces

OPTIONS

750ml Tin: Yellow
5L Tin: Yellow



CONTACT ADHESIVE 140 LQ

DESCRIPTION
LIQUID solvent based neoprene contact adhesive. Ready to use. Fast drying. High adhesive strength. Damp resistant. Easy to apply.

APPLICATIONS
Bonding of most common materials such as rubber, leather, artificial leather, cork and plastics to several substrates or to themselves. Bonding of synthetic panels and worktops to wood, metal, board etc. Traditional joinery bonding.

- Liquid neoprene adhesive
- Solvent based
- Fast drying
- Rapid strength build up
- Damp resistant
- Adhesion onto many materials

OPTIONS

750ml Tin: Yellow
5L Tin: Yellow



FIX ALL® FLOOR & WALL

DESCRIPTION
TROWELLABLE full surface, elastomeric adhesive. No mixing required. High initial grab. Can be applied on wet and damp surfaces, internally or externally. No solvents or odours. Primerless adhesion on most construction materials. Non-staining on porous natural stones. Suitable for sanitary applications.

APPLICATIONS
Elastomeric bonding of many types of sheet materials on walls and floors - tiles, stainless steel panel, splashbacks, wooden paneling, carpet tiles, natural stone cladding, PVCu hygienic cladding. No mixing or primer required. Can be used on damp and difficult substrates, horizontally or vertically. Indoor and outdoor use.

- Trowellable
- No mixing
- Primerless adhesion
- Virtually odourless
- All weather use
- Full surface adhesive
- Mould resistant



OPTIONS

4kg Bucket
White



SUPERGLUE MV



DESCRIPTION

CYANOACRYLATE based adhesive. Super fast curing. For use on non-porous surfaces. High end strength. Fast curing. Medium viscosity. Liquid formulation.

APPLICATIONS

Fast bonding of non porous surfaces, such as rubber, metals, plastics, glass etc. Adhesion can be accelerated using Soudal Superglue Activator.

- Cyanoacrylate based adhesive
- High bond strength
- Super fast bonding
- Medium viscosity
- Liquid
- Works on most non-porous materials

OPTIONS

20g Bottle: Clear
50g Bottle: Clear

SUPERGLUE HV



DESCRIPTION

CYANOACRYLATE based adhesive. Super fast curing. For use on non-porous surfaces. High end strength. Fast curing. High viscosity. Thixotropic formulation.

APPLICATIONS

Fast bonding of non porous surfaces, such as rubber, metals, plastics, glass etc. Adhesion can be accelerated using Soudal Superglue Activator.

- Cyanoacrylate based adhesive
- High bond strength
- Super fast bonding
- High viscosity
- Thixotropic
- Works on most non-porous materials
- Ideal for vertical surfaces

OPTIONS

20g Bottle: Clear
50g Bottle: Clear
100g Bottle: Clear

MITRE-KIT



DESCRIPTION

CYANOACRYLATE based high viscosity adhesive with aerosol activator. Particularly useful for production lines and UPVC window trim. Activator reduces blooming and odour. Fast acting. Curing will occur almost instantly. Easy to use. Non-yellowing.

APPLICATIONS

Used in the furniture, timber, kitchen and plastics industries where its instant bonding properties dramatically reduce assembly times for mitre joints when compared to conventional wood adhesives. The product is also suitable for instant bonding of MDF, rubber, PVCu, metals and most plastics.

- Cyanoacrylate two part adhesive with activator spray
- High bond strength
- High viscosity adhesive
- Non-yellowing
- Can be used on most non-porous substrates
- Ideal for vertical surfaces

OPTIONS

Standard Size - 50g Bottle & 200ml Aerosol: Clear
Large Size - 100g Bottle & 400ml Aerosol: Clear

ACTIVATOR



DESCRIPTION

SOLVENT based aerosol spray activator, Used in conjunction with Soudal Superglue. Spray applied. Reduces blooming and odour. Improves adhesion time. Non-yellowing.

APPLICATIONS

Accelerates adhesion speed of Soudal Superglue products.

- Solvent based aerosol spray
- Activates Superglue
- Non-yellowing
- Reduces bloom and odour

OPTIONS

200ml Aerosol: Clear
400ml Aerosol: Clear



PRO 45P

DESCRIPTION

POLYURETHANE liquid adhesive. Excellent water resistance. Easy application. Professional quality. Foaming penetration action to fill uneven surfaces. Extra fast drying and strength build up. Water resistance: D4 (DIN EN 204). Can be used on damp wood. 5 minute open time.

APPLICATIONS

Manufacturing of door and window frames that need to meet class D4 according to EN 204. Heavy duty bonding of wooden construction elements. Bonding of insulation materials (including polystyrene). Can also be used on various porous and non-porous substrates such as concrete, bricks and many other common materials in the building industry. General joinery of wooden materials.

- Liquid PU adhesive
- Conforms to DIN EN 204 grade D4
- Foaming action to fill gaps
- 5 minute open time
- Pressing time - 30 minutes
- Extra fast



OPTIONS

750g Bottle: Brown
5kg Jerrycan: Brown



PRO 40P

DESCRIPTION

POLYURETHANE liquid adhesive. Excellent water resistance. Easy application. Professional quality. Foaming penetration action to fill uneven surfaces. Fast drying. Water resistance: D4 (DIN EN 204). Can be used on damp wood. 15 minute open time.

APPLICATIONS

Manufacturing of door and window frames that need to meet class D4 according to EN 204. Heavy duty bonding of wooden construction elements. Bonding of insulation materials (including polystyrene). Can also be used on various porous and non-porous substrates such as concrete, bricks and many other common materials in the building industry. General joinery of wooden materials.

- Liquid PU adhesive
- Conforms to DIN EN 204 grade D4
- Foaming action to fill gaps
- 15 minute open time
- Pressing time - 6 hours



OPTIONS

750g Bottle: Brown
5kg Jerrycan: Brown



PUROCOL EXPRESS

DESCRIPTION

POLYURETHANE gun applied, thixotropic construction adhesive. Professional quality. Transparent. Extra fast curing. Gap filling characteristics, suitable for uneven surfaces. Waterproof. Conforms to DIN EN 204 grade D4. Solvent free. 5 minute open time.

APPLICATIONS

Manufacturing of door and window frames that need to meet class D4 according to EN 204. Bonding of wooden construction elements. Bonding of insulation materials (including polystyrene). Can also be used on various porous and non-porous substrates such as concrete, bricks and other common materials in the building industry. General joinery of wooden materials.

- Gun applied thixotropic PU adhesive
- Conforms to DIN EN 204 grade D4
- Foaming action to fill gaps
- Transparent
- 5 minute open time
- Pressing time - 1 hour
- Extra fast



OPTIONS

310ml Cartridge



Transparent



PUROCOL

DESCRIPTION

POLYURETHANE gun applied, thixotropic construction adhesive. Professional quality. Transparent. Fast curing. Gap filling characteristics, suitable for uneven surfaces. Waterproof. Conforms to DIN EN 204 grade D4. Solvent free. 15 minute open time.

APPLICATIONS

Manufacturing of door and window frames that need to meet class D4 according to EN 204. Bonding of wooden construction elements. Bonding of insulation materials (including polystyrene). Can also be used on various porous and non-porous substrates such as concrete, bricks and other common materials in the building industry. General joinery of wooden materials.

- Gun applied thixotropic PU adhesive
- Conforms to DIN EN 204 grade D4
- Foaming action to fill gaps
- Transparent
- 15 minute open time
- Pressing time - 3 hours



OPTIONS

310ml Cartridge



Transparent



PU CONSTRUCT

DESCRIPTION

POLYURETHANE gun applied, thixotropic, construction adhesive. Professional quality. Beige colour. Extra fast curing. Gap filling characteristics, suitable for uneven surfaces. Waterproof. Conforms to DIN EN 204 grade D4. Solvent free. 5 minute open time.

APPLICATIONS

Manufacturing of door and window frames that need to meet class D4 according to EN 204. Bonding of wooden construction elements. Bonding of insulation materials (including polystyrene). Can also be used on various porous and non-porous substrates such as concrete, bricks and other common materials in the building industry. General joinery of wooden materials.

- Gun applied thixotropic PU adhesive
- Conforms to DIN EN 204 grade D4
- Foaming action to fill gaps
- Beige colour
- 5 minute open time
- Pressing time - 15 minutes
- Extra fast



OPTIONS

310ml Cartridge



Beige



PRO 30D

DESCRIPTION

PVA based liquid adhesive. Conforms to DIN EN 204 D3. Easy application. Semi-transparent when dry. High bond strength. Resistant to high temperatures. Solvent free.

APPLICATIONS

Manufacturing of door and window frames that need to meet class D3 according to EN 204. Bonding of wood, board, chipboard, veneer. Mounting of soft wood. Construction bonding such as mortise and tenon joints, punches, etc. General joinery bonding with all types of wood.

- PVA based adhesive
- Solvent free
- Conforms to DIN EN 204 grade D3
- Dries transparent
- Pressing time - 30 minutes
- Hand tight - 2 to 4 hours



OPTIONS

750g Bottle: White

5kg Jerrycan: White

20L Jerrycan: White



PRO 20D

DESCRIPTION

PVA based liquid adhesive. Conforms to DIN EN 204 D2. Easy application. Semi-transparent when dry. High bond strength. Resistant to high temperatures. Solvent free.

APPLICATIONS

Manufacturing of door and window frames that need to meet class D2 according to EN 204. Bonding of wood, board, chipboard, veneer. Mounting of soft wood. Construction bonding such as mortise and tenon joints, punches, etc. General joinery bonding with all types of wood.

- PVA based adhesive
- Solvent free
- Conforms to DIN EN 204 grade D2
- Dries transparent
- Pressing time - 5 - 15 minutes
- Hand tight - 15 minutes to 2 hours
- Extra fast



OPTIONS

750g Bottle: White

5kg Bucket: White

20L Jerrycan: White



PRO 10D

DESCRIPTION

PVA based liquid adhesive. Conforms to DIN EN 204 D2. Easy application. Semi-transparent when dry. High bond strength. Resistant to high temperatures. Solvent free.

APPLICATIONS

Manufacturing of door and window frames that need to meet class D2 according to EN 204. Bonding of wood, board, chipboard, veneer. Mounting of soft wood. Construction bonding such as mortise and tenon joints, punches, etc. General joinery bonding with all types of wood.

- PVA based adhesive
- Solvent free
- Conforms to DIN EN 204 grade D2
- Dries transparent
- Pressing time - 2 hours
- Hand tight - 2 to 4 hours



OPTIONS












750g Bottle: White

5kg Bucket: White

20L Jerrycan: White

Soudafoam®



					
	Window & Door SWS	Window & Door XTRA	Window & Door XTRA	Gap Filler XTRA	Gap Filler XTRA
Filling around windows & doors	★★★★★	★★★★★	★★★★	★	★
Gap Filling	★	★	★	★★★★★	★★★★
Thermal & Acoustic values	★★★★★	★★★★	★★★★	★★★★	★★★★
Linear Expansion	★★★	★★★★★	★★★★	★	★
Volume Expansion	★	★	★	★★★★★	★★★★
Flexibility	★★★★★	★	★	★	★
Airtight		X	X	X	X
Application Temperature	-10°C to +30°C All Seasons	+5°C to +30°C	+5°C to +30°C	+5°C to +30°C	+5°C to +30°C
Extrusion methods					

**Experts in sealants,
adhesives and PU foams**

Soudafoam

SOUDAFOAM is the brand of the World's largest independent polyurethane foam manufacturer. Every week more than 2 million canisters of PU Foam are manufactured in our state of the art production facilities. The SOUDAFOAM range incorporates many patented applicator technologies including **GENIUS GUN**[®], an easy to use, economical alternative to other hand applied foams and **CLICK & FIX**[®], a safe and fast alternative to traditional gun applied foam. SOUDAFOAM is a structured range focusing on application specific solutions, with a focus on quality, innovation and value for money.



Genius Gun Gun Grade Hand Held Click & Fix[®]

DuraValve is a unique valve system that improves the yield and performance of SOUDAFOAM products over a much longer time period than standard valves. DuraValve puts an end to poor yield and non-extrusion of PU Foam and is a standard for all gun applied products. Best quality comes as a standard with SOUDAFOAM.



The **WINDOW & DOOR** product range is focused on high linear yields, high thermal and acoustic properties and is designed for window and door filling and sealing. This range includes **WINDOW & DOOR XTRA** which has an even greater linear yield (50% more Metres than standard) and **WINDOW & DOOR SWS** which has the best thermal, acoustic and noise insulation properties due to our patented **FLEXIFOAM**[®] technology.

The **GAP FILLER** product range has high volume yields, high thermal and acoustic properties and is designed for filling large gaps. This range includes **GAP FILLER XTRA** which has an even greater volume yield (50% more Litres than standard). This range also uses our **GENIUS GUN**[®] **MAX ADAPTOR** and **HAND HELD MEGA ADAPTOR** to increase the yield of our hand held foams.

The specialist range includes; **SMX**[®] the World's first 100% isocyanate free PU foam filler and **EXPRESS**, a very high speed, two-component, polyurethane gap filler which cures without the need for atmospheric humidity.

FEICA

SOUDAL are a member of FEICA, the Association of the European Adhesive & Sealant Industry. FEICA members manufacture more than 90% of all one-component foams in the European market. Members work together to develop standards and professionalise the industry. We are active within the FEICA Technical Working Group and an important achievement has been the development of standardised test methods.

These methods allow the performance of foam products to be measured and compared for the first time. We are signatories of the Manufacturers Declaration of Intent, which commits us to best practice and to the use of these FEICA Test Methods.



- Comfortable
- Easy to use
- Re-usable





WINDOW & DOOR XTRA

DESCRIPTION

HIGH YIELD polyurethane expanding foam filler. Window & door filling formulation with high linear expansion. Fills 50% more Metres than standard SOUDAFOAM WINDOW & DOOR. Easy to use, one component. Rapid curing. Excellent thermal and acoustic insulation properties. Primerless adhesion on most construction materials. Available in Gun Grade with DuraValve.

APPLICATIONS

Professional filling around PVCu, aluminium and wooden windows and doors. Extra high yield.

- Polyurethane foam filler
- Linear yield FEICA TM1002 - 750ml Gun Grade: 39M
- Acoustic rating ISO 717-1: 58 dB
- Thermal conductivity DIN 52612: 37mW/mK
- Application temperatures: +5°C to +30°C
- Gun Grade



OPTIONS

750ml Gun Grade DuraValve: Champagne



WINDOW & DOOR

DESCRIPTION

POLYURETHANE expanding foam filler. Window & door filling formulation with high linear expansion. Easy to use, one component. Rapid curing. Excellent thermal and acoustic insulation properties. Primerless adhesion on most construction materials. Available in Hand Held and Genius Gun® MAX, Gun Grade and Click & Fix® versions both come with DuraValve.

APPLICATIONS

Professional filling around PVCu, aluminium and wooden windows and doors.

- Polyurethane foam filler
- Linear yield FEICA TM1002 - 750ml Gun Grade: 26M
- Acoustic rating ISO 717-1: 58 dB
- Thermal conductivity DIN 52612: 37mW/mK
- Application temperatures: +5°C to +30°C
- Hand Held, Genius Gun® MAX, Gun Grade and Click & Fix® versions.



OPTIONS

750ml Hand Held: Champagne
750ml Gun Grade DuraValve: Champagne
750ml Click & Fix® DuraValve: Champagne
600ml Genius Gun® MAX: Champagne

WINDOW & DOOR GUN GRADE COMBI-BOX APPLICATOR PACK



DESCRIPTION

SOUDAFOAM WINDOW & DOOR Multi-Pack. Contains 10 units of SOUDAFOAM WINDOW & DOOR Gun Grade 750ml and the tools to apply and clean after use.

APPLICATIONS

Professional filling around PVCu, aluminium and wooden windows and doors. Each pack fills up to 260 Metres of linear gaps.

- Polyurethane foam filler
- Linear yield FEICA TM1002 - 750ml Gun Grade: 26M
- Solvent based PU Foam cleaner
- Quick & easy to use
- Compact Gun



OPTIONS

Multi-pack: 10 x 750ml Soudafoam Window & Door Gun Grade DuraValve, 1 x Soudafoam Gun & Foam Cleaner 500ml, 1 x Compact Foam Gun



GAP FILLER XTRA

DESCRIPTION

HIGH YIELD polyurethane expanding foam filler. Gap filling formulation with optimised 3D expansion. Fills 50% more volume than standard SOUDAFOAM GAP FILLER. Easy to use, one component. Rapid curing. Excellent thermal and acoustic insulation properties. Primerless adhesion on most construction materials. Available in Hand Held MEGA ADAPTOR, Genius Gun® and Gun Grade with DuraValve version.

APPLICATIONS

General purpose gap filling: pipe penetrations, insulation and roofing materials and general construction. Extra high yield.

- Polyurethane foam filler
- Volume yield FEICA TM1003 - 750ml Gun Grade: 51L
- Acoustic rating ISO 717-1: 58 dB
- Thermal conductivity DIN 52612: 37mW/mK
- Application temperatures: +5°C to +30°C
- Hand Held, Gun Grade and Genius Gun® versions

OPTIONS

750ml Hand Held MEGA ADAPTOR: Champagne
750ml Gun Grade DuraValve: Champagne
750ml Genius Gun®: Champagne



GAP FILLER

DESCRIPTION

POLYURETHANE expanding foam filler. Gap filling formulation with high 3D expansion. Easy to use, one component. Rapid curing. Excellent thermal and acoustic insulation properties. Primerless adhesion on most construction materials. Available in Hand Held and Genius Gun®, Gun Grade and Click & Fix® versions both come with DuraValve.

APPLICATIONS

General purpose gap filling: pipe penetrations, insulation and roofing materials and general construction.

- Polyurethane foam filler
- Volume yield FEICA TM1003 - 750ml Gun Grade: 34L
- Acoustic rating ISO 717-1: 58 dB
- Thermal conductivity DIN 52612: 37mW/mK
- Application temperatures: +5°C to +30°C
- Hand Held, Genius Gun®, Gun Grade and Click & Fix® versions.



OPTIONS

750ml Hand Held: Champagne
500ml Hand Held: Champagne
750ml Gun Grade DuraValve: Champagne
750ml Click & Fix® DuraValve: Champagne
600ml Genius Gun®: Champagne

GAP FILLER GUN GRADE COMBI-BOX APPLICATOR PACK

DESCRIPTION

SOUDAFOAM GAP FILLER Multi-Pack. Contains 10 units of SOUDAFOAM GAP FILLER Gun Grade 750ml and the tools to apply and clean after use.

APPLICATIONS

General purpose gap filling: pipe penetrations, insulation and roofing materials and general construction. Each pack fills up to 340 Litres of gaps.

- Polyurethane foam filler
- Volume yield FEICA TM1003 - 750ml Gun Grade: 34L
- Solvent based PU Foam cleaner
- Quick & easy to use
- Compact Gun



OPTIONS

Multi-pack:
10 x Soudafoam Gap Filler Gun Grade 750ml
1 x Soudafoam Gun & Foam Cleaner 500ml
1 x Soudafoam compact Foam Gun

ONE SHOT

DESCRIPTION

ONE SHOT polyurethane expanding foam filler. Small format packaging for minor filling applications. Gap filling formulation with high 3D expansion. Easy to use, one component. Rapid curing. Excellent thermal and acoustic insulation properties. Primerless adhesion on most construction materials. Hand Held.

APPLICATIONS

General purpose gap filling: pipe penetrations, insulation and roofing materials and general construction.

- Polyurethane foam filler
- Volume yield FEICA TM1003 - 150ml Hand Held: 5L
- Acoustic rating ISO 717-1: 58 dB
- Thermal conductivity DIN 52612: 37mW/mK
- Application temperatures: +5°C to +30°C
- Hand Held.



OPTIONS

150ml Hand Held: Champagne

SMX®

DESCRIPTION

SMX® POLYMER expanding foam. Environmentally friendly, easy to use, one component. No free isocyanate content. Rapid curing. Excellent thermal and acoustic insulation properties. Primerless adhesion on most construction materials. Available in Hand Held.

APPLICATIONS

Environmentally friendly, thermal and acoustic insulation around doors and window frames, pipe penetrations, insulation and roofing materials and general construction.

- SMX® polymer foam filler
- Isocyanate free
- Environmentally friendly
- Acoustic rating ISO 717-1: 58 dB
- Thermal conductivity DIN 52612: 35mW/mK
- Application temperatures: +5°C to +30°C
- Volume yield FEICA TM1003 - 400ml Hand Held: 12L
- Hand Held



OPTIONS

500ml Hand Held: White

EXPRESS

DESCRIPTION

EXTRA FAST curing polyurethane foam filler. Accelerated curing speed (approximately 20 minutes) due to two-component system. Excellent thermal and acoustic insulation properties. Primerless adhesion on most construction materials. Cures without atmospheric moisture.

APPLICATIONS

Especially for filling where fast curing is required or when material or atmosphere is low in humidity. Thermal and acoustic insulation around doors and window frames, pipe penetrations, insulation and roofing materials and general construction.

- 2 component polyurethane foam filler
- 20 minute curing time
- Cures without moisture
- Volume yield FEICA TM1003 - 400ml Hand Held: 10L
- Acoustic rating ISO 717-1: 58 dB
- Thermal conductivity DIN 52612: 37mW/mK
- Application temperatures: +5°C to +30°C
- Hand Held



OPTIONS

400ml Hand Held: Green

GUN & FOAM CLEANER

DESCRIPTION

SOLVENT BASED aerosol spray applied, polyurethane foam cleaner.

APPLICATIONS

Used for the cleaning of PU Foam applicator guns. Gun applied PU Foam valves and uncured PU Foam, can also be quickly and easily removed with the attachable spray nozzle.

- Solvent based PU Foam cleaner
- Quick & easy to use
- Attachable spray nozzle
- Aerosol applied
- Gun Grade and Click & Fix® versions



OPTIONS

500ml Gun Grade: Clear
500ml Click & Fix®: Clear

DESIGN PU FOAM GUN

DESCRIPTION

HEAVY DUTY PROFESSIONAL GRADE metal polyurethane applicator gun for use with gun foams. Available for Click & Fix® and Gun Grade systems.

APPLICATIONS

For the application of PU foams and cleaners.



COMPACT PU FOAM GUN

DESCRIPTION

PROFESSIONAL GRADE polyurethane applicator gun for use with gun foams. Available for Click & Fix® and Gun Grade systems.

APPLICATIONS

For the application of PU foams and cleaners.



OPTIONS

Gun Grade: Standard Size, 60cm Long Barrel, 1M Extra-long Barrel.
Click & Fix®. Standard Size.

OPTIONS

Gun Grade: Standard Size
Click & Fix® Standard Size

FOAM REMOVER



DESCRIPTION

GEL BASED PU foam cleaner. Odourless and free of aromatic solvents.

APPLICATIONS

For the quick and easy removal of cured polyurethane foam residues from non-porous surfaces such as plastics, metals and PVCu.

- Gel based cleaner
- Virtually odorless
- Can be applied by brush or spatula
- Highly effective
- Solvent free

OPTIONS

100ml Bottle: Clear

PU FOAM NOZZLES

DESCRIPTION

Hand held straw replacement.



OPTIONS

Pack of 5



ACRYRUB®


DESCRIPTION

SUPERIOR QUALITY acrylic polymer based sealant and filler. Solvent free and virtually odourless. Very easy to apply. Colourfast and waterproof after curing. Can be painted over after curing. Very good adhesion on many porous surfaces.


APPLICATIONS

Sealing of window sills, skirting boards, architraves, plasterboard, brickwork, etc. Filling of small cracks in plaster.

- Acrylic polymer sealant and filler
- Extensive colour range
- Paintable
- Virtually odourless
- Conforms to ISO 11600 F 12.5 P



OPTIONS

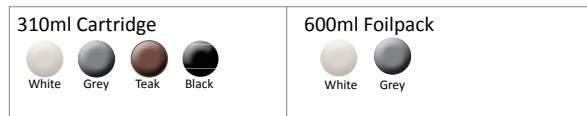

ACRYRUB® UK


DESCRIPTION

HIGH QUALITY acrylic polymer based sealant and filler. Solvent free and virtually odourless. Very easy to apply. Colourfast and waterproof after curing. Can be painted over after curing. Very good adhesion on many porous surfaces.


APPLICATIONS

Sealing of window sills, skirting boards, architraves, plasterboard, brickwork, etc. Filling of small cracks in plaster.

- Acrylic polymer sealant and filler
- Paintable
- Virtually odourless
- Conforms to ISO 11600 F 7.5 P



OPTIONS

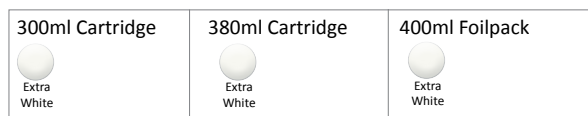

DEC CAULK


DESCRIPTION

GENERAL PURPOSE acrylic polymer based sealant and filler. Solvent free and virtually odourless. Very easy to apply. Colourfast and waterproof after curing. Can be painted over after curing. Very good adhesion on many porous surfaces.

APPLICATIONS

Sealing of window sills, skirting boards, architraves, plasterboard, brickwork, etc. Filling of small cracks in plaster.

- Acrylic polymer sealant and filler
- Paintable
- Virtually odourless



OPTIONS



TRANSPACRYL


DESCRIPTION

TRANSPARENT acrylic polymer based sealant and filler. The product cures transparent. Solvent free and virtually odourless. Very easy to apply. Colourfast and waterproof after curing. Can be painted over after curing. Very good adhesion on many porous surfaces.

APPLICATIONS

Sealing of window sills, skirting boards, architraves, plasterboard, brickwork, etc. Filling of small cracks in plaster.

- Acrylic polymer sealant and filler
- Transparent colour
- Paintable
- Virtually odourless



OPTIONS





SOUDAFILL LIGHT

DESCRIPTION

LIGHTWEIGHT acrylic polymer based, repair plaster. For an easy and quick reparation or filling in walls & ceilings e.g: cracks, screw holes etc... Can be applied by trowel or gun. Sandable and over-paintable once dried. Non-shrinking.

APPLICATIONS

For the filling and repair of cracks and small holes in walls and ceilings - plasterboard, concrete, stone, plasterwork, masonry and decorative plaster. For the filling of static joints and cracks in walls and ceilings.

- Acrylic polymer lightweight repair plaster
- Smooth finish
- Very fast curing
- Non-shrinking
- Can be sanded after curing
- Paintable
- Very good adhesion on many porous materials

OPTIONS

900ml Tub



White



PVCu GAP FILLER

DESCRIPTION

One part, solvent based, PVC resin for sealing, bonding and filling PVC and PVCu materials. Thick-bodied; low slumping and stringing. Excellent primerless adhesion. Once dried the product remains permanently odourless, can be sanded or sawn and exhibits characteristics similar to rigid PVC. Resistant to UV, rain, snow, ozone and many chemicals.

APPLICATIONS

Sealing, filling and bonding of PVCu window and door frames, window boards, trims and reveals, cladding and roofline, PVC guttering and drainage systems. Jointing of PVC and PVC coated sheet roofing materials. General maintenance, repair, filling and sealing of PVC and PVCu materials.

- Solvent based PVC resin
- Seals, bonds, fills and repairs
- Thick bodied
- Primerless adhesion
- UV resistant

OPTIONS

300ml Cartridge



White



REPA-CRYL D


DESCRIPTION

TEXTURED specialist acrylic polymer based sealant and filler. For use in areas where a granular type finish is required. Solvent free and virtually odourless. Very easy to apply. Colourfast and waterproof after curing. Can be painted over after curing. Very good adhesion on many porous surfaces.

APPLICATIONS

Sealing compound for cracks in concrete, pebble dash, plaster, stucco and other textured cementitious surfaces. Joints between window sills, skirting board, floors and brickwork.

- Acrylic polymer sealant and filler
- Paintable
- Virtually odourless
- Granular structure
- Interior & exterior use



OPTIONS

310ml Cartridge



White



SOUDABAND ACTIV PLUS - BG1 + BGR

DESCRIPTION

AIRTIGHT pre-compressed foam sealing tape with triple functionality - exterior weatherproofing against driving rain up to DIN 18542: 2009 class BG1 - 600pa, thermal and acoustic insulation in the centre and interior airtight sealing in conformity with DIN 18542: 2009 class BGR. The tape is impregnated with an adhesive and can be used without a primer. Fully UV and rain resistant. Supplied in various roll lengths and widths. Virtually odourless. After application the tape expands to fill gaps and uneven surfaces.

APPLICATION

Suitable for quick and easy sealing and insulating of all types of windows in one application. Sealing of PVCu, aluminium and wooden frames.

- Pre-compressed polyurethane sealant and insulation tape
- Airtight - Conforms to DIN 18542: 2009, class BGR
- Weathertight - Conforms to DIN 18542: 2009, class BG1
- Weather resistant to at least 600Pa
- Interior and exterior use



OPTIONS

Rolls: 54/5-10 x 5.6m, 64/5-10 x 5.6m, 74/5-10 x 5.6m, 84/5-10 x 5.6m, 54/7-15 x 4.3m, 64/7-15 x 4.3m, 74/7-15 x 4.3m, 84/7-15 x 4.3m, 54/10-20 x 3.3m, 64/10-20 x 3.3m, 74/10-20 x 3.3m, 84/10-20 x 3.3m



SWS INSIDE TAPE



DESCRIPTION

AIRTIGHT and damp-proof membrane for internal window to wall joints. Can be plastered on both sides. Self-adhesive strip for use on the window side and a butyl based adhesive strip connects the tape to the building envelope (except 400mm width).

APPLICATION

Used for internal airtight sealing between the window frame and the building substrate. Supplied in various widths.

- Airtight and damp-proof membrane
- Can be plastered on both sides
- Self adhesive strip
- Butyl based adhesive strip
- Interior use

OPTIONS

Rolls: 70mm x 25m, 100mm x 25m, 150mm x 25m, 300mm x 25m - all with butyl strip. 400mm x 20m - without butyl strip

SWS OUTSIDE TAPE



DESCRIPTION

VAPOUR OPEN membrane for external window to wall joints. Can be plastered or covered with an outside insulation system (ETICS type). Self-adhesive strip for use on the window side and a butyl based adhesive strip connects the tape to the building envelope.

APPLICATION

Used for external vapour open sealing between the window frame and the building substrate. Used in conjunction with SWS Inside Tape as a system. Supplied in various widths.

- Vapour open membrane
- Can be plastered
- Self adhesive strip
- Butyl based adhesive strip
- Exterior use

OPTIONS

Rolls: 70mm x 25m, 100mm x 25m, 150mm x 25m - all with butyl strip



SOUDAFOIL 330D

DESCRIPTION

ACRYLIC polymer based acrylic adhesive for use with SWS Inside Tape. Solvent free and virtually odourless. Interior use only.

APPLICATIONS

Used for full surface bonding of SWS Inside Tape to the building envelope.

- Acrylic polymer adhesive
- Used with SWS Inside Tape
- Gap filling properties
- Virtually odorless
- Porous and solvent sensitive materials.

OPTIONS

310ml Cartridge



White

600ml Foilpack



White



SOUDAFOIL 360H

DESCRIPTION

AIRTIGHT hybrid polymer based adhesive for use with both SWS Inside and SWS Outside Tapes. Solvent free and virtually odourless. Excellent bond strength to most common building materials, without primer. Isocyanate free. Works on damp surfaces. Interior and exterior use.

APPLICATIONS

Used for full surface bonding of SWS Inside and Outside Tapes to the building envelope.

- Hybrid polymer adhesive
- Used with SWS Inside and SWS Outside Tape
- Gap filling properties
- Virtually odorless
- Most construction materials without primer

OPTIONS

600ml Foil Pack



Grey



SOUDASEAL® EPDM

DESCRIPTION

HYBRID POLYMER adhesive especially developed for the bonding of SOUDAL EPDM membranes to window frames and the building envelope. Fast skinning and curing. Thick-bodied. Primerless adhesion on almost other construction materials. Highly elastic. Resistant to UV, rain, snow, ozone, and many chemicals. High and low temperature resistance. Solvent free and virtually odourless. Gap filling - can accommodate uneven surfaces.

APPLICATIONS

Used for the long-term bonding of SOUDAL EPDM membranes to window frames and the building envelope.

- Hybrid polymer
- For use with Soudal EPDM membranes
- Primerless adhesion
- Virtually odourless
- Internal and external use

OPTIONS

600ml Foilpack:



Black

EPDM MEMBRANE FIX

DESCRIPTION

AIRTIGHT and watertight EPDM based membrane used for the weatherproofing of external façades, typically between the window frame and building envelope. Highly elastic. Comes with self adhesive butyl based strip. 0.8mm thick membrane. Conforms to CE: EN 13984. Supplied in various roll widths.

APPLICATIONS

Sealing and weatherproofing of external façades, typically between the window frame and building envelope.

- EPDM based membrane
- Airtight and watertight
- Self adhesive butyl strip
- Conforms to CE: EN 13984.

OPTIONS

Rolls: 150mm x 20m, 200mm x 20m, 250mm x 20m, 300mm x 20m

EPDM MEMBRANE

DESCRIPTION

AIRTIGHT and watertight EPDM based membrane used for the weatherproofing of external façades, typically between the window frame and building envelope. Highly elastic. 1.2mm extra thick membrane. Conforms to CE: EN 13984. Supplied in various roll widths.

APPLICATIONS

Sealing and weatherproofing of external façades, typically between the window frame and building envelope.

- EPDM based membrane
- Airtight and watertight
- Extra thick - 1.2mm
- Conforms to CE: EN 13984.

OPTIONS

Rolls: 200mm x 20m, 250mm x 20m, 300mm x 20m, 400mm x 20m

VAPOURSEAL



DESCRIPTION

VAPOUR BARRIER FOIL plasto-elastic sealant and adhesive, based on acrylic polymers. Ready to use. Gun applied. Water based, contains no solvents or plasticizers. For indoor air and vapour tight connections with all types of vapour barrier foils. UV resistant. Permanently flexible.

APPLICATIONS

Used for making air tight connections between vapour barrier foils and all kinds of building substrates. Air tight connections between adjacent constructions. Guarantees air and vapour tight connections according to DIN4108-7 and NBN EN 13829 if applied correctly.

- Acrylic polymer sealant & adhesive
- Air and vapour tight
- Excellent adhesion on all types of vapour barrier foils
- Good adhesion on damp porous substrates
- Solvent, plasticizer and isocyanate free
- UV resistant

OPTIONS

300ml Cartridge



Blue

600ml Foilpack



Blue

SOUDATAPE CONNECT



DESCRIPTION

AIRTIGHT self-adhesive tape for long-term bonding and sealing of overlaps in damp-proof sheets. Also can be used for repairing small holes and tears in damp-proof layers. Solvent free acrylic adhesive.

APPLICATIONS

For sealing overlaps and connections in damp-proof sheets.

- Self-adhesive tape
- Airtight
- Solvent free acrylic adhesive
- Seals and repairs damp-proof layers

OPTIONS

Rolls: Yellow 60mm x 40m

SOUDATAPE FLEX



DESCRIPTION

AIRTIGHT elastic self-adhesive tape for bonding overlaps and penetrations (pipes, ducts etc) through damp-proof and vapour barrier layers. Carrier made from strengthened polyethylene. Solvent free acrylic adhesive.

APPLICATIONS

For sealing overlaps and penetrations in damp-proof sheets.

- Self-adhesive tape
- Airtight
- Solvent free acrylic adhesive
- Strengthened polyethylene tape
- Seals and repairs damp-proof layers

OPTIONS

Rolls: White 60mm x 25m, White 150mm x 25m

SOUDATAPE FAÇADE



DESCRIPTION

AIRTIGHT self-adhesive tape for general use inside and outside the building envelope. Polypropylene fleece based tape. Solvent free acrylic adhesive. Particularly suitable for sealing between wooden and OSB boards and other materials in timber framed constructions. Can also be used on damp-proof sheets.

APPLICATIONS

For sealing in wooden frame constructions.

- Self-adhesive tape
- Airtight
- Solvent free acrylic adhesive
- Polypropylene fleece based tape
- Seals and repairs damp-proof layers

OPTIONS

Rolls: Black 60mm x 25m, Black 60mm x 25m with split liner

SOUDATIGHT LQ LIQUID



DESCRIPTION

AIRTIGHT premium quality, fibre reinforced polymer paste which is applied quickly and easily by brush. Forms an airtight and vapour tight elastic membrane after drying. Works on almost all mineral surfaces. Fills cracks of up to 2mm due to the fibre content. Changes colour after drying from blue to black. Once dry a second coat (or more) can be applied if required.

Can also be painted or plastered over once dry. Virtually odourless.

APPLICATIONS

General airtightness of any joints or connections e.g. floor to wall joints, wall to ceiling joints. Can also be used as an alternative to SWS Inside Tape if used as part of a system with Soudafoam Window & Door SWS.

- Liquid polymer membrane
- Airtight
- Solvent free
- Easy to apply by brush
- Fills gaps of up to 2mm due to fibre-reinforcement

OPTIONS

5kg Bucket: Blue

SOUDATIGHT GEOTEXTILE



DESCRIPTION

An innovative non-woven fabric to cover up cracks, joints and gaps which are bigger than 2mm. Use it in combination with Soudatight (preferably Soudatight LQ) to fixate the fabric and finish with a second layer of a Soudatight product of choice.

APPLICATIONS

General airtightness of any joints or connections e.g. floor to wall joints, wall to ceiling joints. Use to bridge wider gaps which are bigger than 2mm.

- Non-woven fabric
- Covers gaps larger than 2mm
- Used with Soudatight liquid membranes

OPTIONS

15cm x 20cm Roll: White

SOUDATIGHT SP SPRAYABLE



DESCRIPTION

AIRTIGHT premium quality, polymer paint which is applied quickly and easily by brush or airless spray machine. Forms an airtight and vapour tight elastic membrane after drying. Works on almost all mineral surfaces. Changes colour after drying from blue to black. Once dry a second coat (or more) can be applied if required. Can also be painted or plastered over once dry. Virtually odourless.

Can also be painted or plastered over once dry. Virtually odourless.

APPLICATIONS

General airtightness of any joints or connections e.g. floor to wall joints, wall to ceiling joints. A much faster application is possible over large project areas using an airless spray machine.

- Liquid polymer membrane
- Airtight
- Solvent free
- Easy to apply by brush
- Sprayable with airless spray machines for large scale projects

OPTIONS

10kg Bucket: Blue

SOUDATIGHT SP GUN



DESCRIPTION

AIRTIGHT premium quality, polymer paint which is spray applied using a compressor and our specialist Soudatight SP Gun Applicator and Nozzles. Forms an airtight and vapour tight elastic membrane after drying. Works on almost all mineral surfaces. Changes colour after drying from blue to black. Once dry a second coat (or more) can be applied if required. Can also be painted or plastered over once dry. Virtually odourless.

APPLICATIONS

General airtightness of joints and connections in construction e.g. floor to wall joints, wall to ceiling joints. A much faster application is possible over large project areas using Soudatight SP Gun Applicator and Nozzles. Controlled spray pattern.

- Liquid polymer membrane
- Airtight
- Solvent free
- Fast application using Soudatight SP Gun Applicator and compressor

OPTIONS

1kg Can: Blue



SOUDATIGHT SP GUN APPLICATOR



DESCRIPTION

SPECIALIST applicator gun used to apply Soudatight SP Gun. Used in conjunction with a compressor and Soudatight SP Gun Applicator Nozzles. Heavy duty and extremely durable. Very easy to clean using water, after applications. Quick and easy to use.

APPLICATIONS

Application of Soudatight SP Gun paint onto joints and connections in construction, where an airtight seal is required.

- Used with Soudatight SP Gun
- Heavy duty
- Easy to clean
- Quick and efficient.

OPTIONS

Gun

SOUDATIGHT SP GUN NOZZLES



DESCRIPTION

SPECIALIST applicator nozzles used to apply Soudatight SP Gun. Used in conjunction with a compressor and Soudatight SP Gun. Very narrow spray pattern – typically 2-3cm. Very easy to clean using water, after applications. Quick and easy to use.

APPLICATIONS

Application of Soudatight SP Gun paint onto joints and connections in construction, where an airtight seal is required.

- Used with Soudatight SP Gun
- Controlled spray pattern
- Easy to clean
- Quick and efficient.

OPTIONS

Pack of 5



SOUDATIGHT HYBRID

DESCRIPTION

AIRTIGHT brushable and sprayable liquid membrane based on Hybrid Polymer technology. Can be used for both indoor and outdoor applications. Can be quickly spray applied using Cox Jetflow 3 Applicator Gun and Jetflow 3 Nozzles. Can also be applied using traditional 600ml foilpack guns (manual, battery powered or pneumatic) and brushed over joints or areas to be made airtight.

APPLICATIONS

General airtightness of joints and connections in construction e.g. floor to wall joints, wall to ceiling joints. A much faster application is possible over large project areas using Cox Jetflow 3 Applicator Gun and Jetflow 3 Nozzles.

- Hybrid polymer based liquid membrane
- Airtight
- Solvent free
- Sprayable & brushable
- Indoor & outdoor use
- Fast application using Cox Jetflow 3 Applicator Gun

OPTIONS

600ml Foilpack



Grey

BUTYBAND FLEECE

DESCRIPTION

AIRTIGHT self-adhesive butyl based flashing tape for the sealing of gaps and joints in construction. Excellent bond to almost all porous and mineral surfaces. Can be plastered over on the fleece backed side. Available in various sizes.



APPLICATIONS

General airtightness of joints and connections in construction.

- Self-adhesive flashing tape
- Airtight and damp-proof
- Butyl based
- Plasterable on fleece backed side.

OPTIONS

Rolls: Black 100mm x 20m, Black 150mm x 20m



COX JETFLOW 3 APPLICATOR GUN



DESCRIPTION

SPECIALIST applicator gun used to apply Soudatight Hybrid. Used in conjunction with a compressor and Soudatight Hybrid and Cox Jetflow 3 Applicator Nozzles. Heavy duty and extremely durable. Quick and easy to use.

APPLICATIONS

Application of Soudatight Hybrid onto joints and connections in construction, where an airtight seal is required.

- Used with Soudatight Hybrid
- Heavy duty
- Quick and efficient.

OPTIONS

Gun

COX JETFLOW 3 NOZZLES



DESCRIPTION

SPECIALIST applicator nozzles used to apply Soudatight Hybrid. Used in conjunction with a compressor and Soudatight Hybrid. Can be applied as a bead of product or in a spray pattern depending on nozzle used and set up (2 different types of nozzle are supplied in each pack). Quick and easy to use.

APPLICATIONS

Application of Soudatight Hybrid paint onto joints and connections in construction, where an airtight seal is required.

- Used with Soudatight Hybrid
- Controlled spray pattern
- Can also be applied in beads
- Quick and efficient.

OPTIONS

Pack of 10 x 2 Nozzles

SOUDATIGHT GUARANTEED AIRTIGHT

TEST REPORT IFT-MO-01/1 (16-003313-PRO2)

Soudatight, the only tested system solution with liquid membranes on the inside and outside

Airtightness (EN 12114):

Watertightness (EN 1027) :

Ageing:


up to 1000 Pa, even after ageing

up to 600 Pa, even after ageing

- Thermal: 10 cycles -15°C to +60°C

- Mechanical: 10,000 cycles opening/closing (according to EN 1191)

- Wind Load: 200 cycles of 1000 Pa negative/positive air pressure (according to EN 12211)

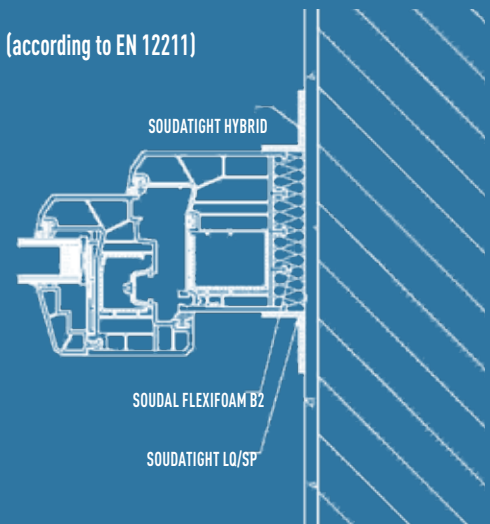

EXPERTS IN SEALANTS, FOAMS AND ADHESIVES

SOUDATHERM SFI 600P



DESCRIPTION

AIRTIGHT structural frame insulation foam. Polyurethane based. Used to bond, fill and strengthen the connections between window frames and sealed units in window fabrication. Airtight. Improves thermal and acoustic properties of final window construction. Also improves structural stability of windows. Controlled expansion rate. Compatible with all type of window frame materials - aluminium, PVCu and wood and also IGU sealants. Patent pending. Applied using a variety of specialist hardware, which forms part of the range.


APPLICATIONS

Structural sealing, bonding, filling and insulating of joints and connections in window construction, specifically between window frames and IGU. Airtight filling applications.

- Polyurethane frame adhesive
- Bonds, seals, fills and insulates
- Airtight
- Improves thermal and acoustic properties of windows
- Unique solution from Soudal - Patent Pending

OPTIONS

10.4kg Canister: Grey

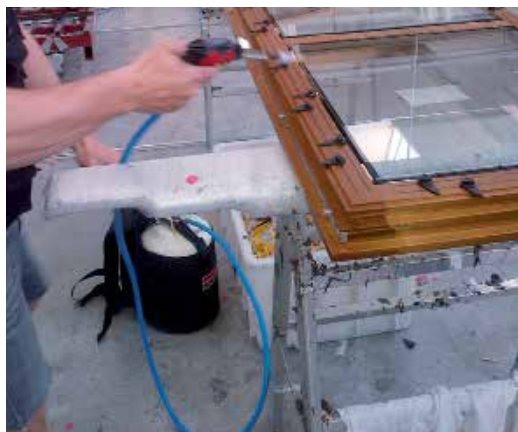

SOUDATHERM SFI 600P NOZZLE



DESCRIPTION

STANDARD applicator nozzle for use with Soudatherm SFI 600P guns.

SOUDATHERM SFI 600P GUN



DESCRIPTION

STANDARD gun for use with Soudatherm SFI 600P.

SOUDATHERM SFI 600P MULTI GUN



DESCRIPTION

MULTI-USE gun for use with Soudatherm SFI 600P.

SOUDATHERM SFI 600P TROLLEY



DESCRIPTION

TROLLEY for Soudatherm SFI 600P system. Allows quick and easy transit of canisters around a production location.





SOUDABOND 642 DUO

DESCRIPTION

HIGH STRENGTH two-component polyurethane assembly adhesive for the fabrication of aluminium window frames. Solvent free. 100% solids content, no shrinkage. Suitable for post-injection systems. Fast curing. Side by side 310ml cartridges are applied using SOUDABOND DUO applicator gun or pneumatic gun.

APPLICATIONS

Bonding of aluminium window frames and other bonding applications that require a high final bond strength and/or fast curing.

- Two-component polyurethane adhesive
- Aluminium window fabrication and other bonding applications
- High strength
- Solvent free, no shrinkage
- Fast curing
- Suitable for post-injection systems

OPTIONS

2 x 310ml Cartridge



Beige



SOUDABOND 641

DESCRIPTION

HIGH STRENGTH one-component polyurethane assembly adhesive for the fabrication of aluminium window frames. Suitable for pre-injection systems.

APPLICATIONS

Bonding of aluminium window frames and other bonding applications that require a high final bond strength.

- One-component polyurethane adhesive
- Aluminium window fabrication and other bonding applications
- High strength
- Suitable for pre-injection systems

OPTIONS

310ml Cartridge



White



SOUDABOND DUO GUN

DESCRIPTION

HEAVY DUTY professional grade, steel application gun to use with Soudabond 642 DUO and any other similar two-component, side by side cartridge packaging.

APPLICATIONS

Used to apply Soudabond 642 DUO quickly and efficiently at the correct mix ratio.

- Heavy duty applicator gun
- Used to apply Soudabond 642 DUO

OPTIONS

Gun



ALUSEAL

DESCRIPTION

TRANSPARENT synthetic rubber based sealant coating for the protection of cut aluminium window mitre joints. Non-aggressive to lacquers or coatings used in the fabrication of windows. Highly elastic and UV resistant. Compatible with window fabrication adhesives - Soudabond 641 and Soudabond 642. Can also be used with Tekna TK259 machine.

APPLICATIONS

Corrosion protection of cut aluminium profiles (mitre joints) and general sealing (weather, water, air) of assembled aluminium windows.

- Synthetic rubber sealant and coating for aluminium windows
- UV resistant
- Highly elastic
- Compatible with Soudabond 641 & 642 adhesives
- Can be used with Tekna TK259 machine

OPTIONS

310ml Cartridge



Transparent



SURFACE CLEANER

DESCRIPTION

Cleaner and degreaser for use prior to the application of Soudal window fabrication products. It can also be used for the removal of excess Aluseal, PU, silicone and hybrid polymers.

APPLICATIONS

Cleaning and degreasing window profiles and other non-porous surfaces. Removing excess product (before curing) from surfaces.

- Cleaner and degreaser for aluminium windows
- Can be used to remove excess product (before curing)
- Can be used with other non-porous surfaces
- Compatible with Soudabond 641, Soudabond 642 and AluSeal

OPTIONS

500ml Flask: Clear



SURFACE ACTIVATOR

DESCRIPTION

UNIVERSAL cleaner, degreaser and primer. Used for activating non-porous surfaces to achieve an improved adhesion. Cleaning, degreasing and activating of non-porous substrates.

APPLICATIONS

Cleaning of non-porous surfaces prior to the application of silicones, polyurethanes, hybrid polymers and polysulphides.

- Liquid surface activator for non-porous surfaces
- Cleans, degreases and activates
- Universal use, can be used with many types of sealants and adhesives
- One component - easy to use
- Clear

OPTIONS

500ml Flask: Clear



ACTIVATOR SPRAY 601



DESCRIPTION

UNIVERSAL aerosol applied surface activator for use with silicone, PU and hybrid polymer based sealants and adhesives. Used to improve the adhesion on anodized, lacquered and powder coated aluminium. Mild smelling. Fast drying. Compatible with most lacquered surfaces. Also suitable for most plastics and other metals.

APPLICATIONS

Priming of anodized, lacquered and powder coated aluminium surfaces prior to the application of silicone, PU and hybrid polymer sealants and adhesives.

- Aerosol applied liquid surface activator
- For use on powder coated aluminium
- Activates and primes
- Works with PU, silicone and hybrid polymer
- One component - easy to use
- Clear

OPTIONS

500ml Aerosol Spray



SODASEAL MIRROR


DESCRIPTION

HYBRID POLYMER based mirror adhesive and sealant with very high initial grab reducing the need for support. High bond strength and fast cure onto nearly all surfaces, even when damp. High performance mechanical properties. Excellent extrudability even at low temperatures. Free of isocyanates, silicone, solvents, halogens and acids. Minimal health and safety considerations. Resistant to many chemicals and withstands mould growth. No staining of porous materials such as natural stone, blue stone, marble and granite.

APPLICATIONS

Direct bonding of mirrors onto most types of surfaces, including uneven and damp surfaces. Sealing of joints in mirror walls.

- Hybrid polymer sealant & adhesive
- Damp surface adhesion
- Direct bonding & sealing of mirrors
- Damp surface adhesion
- Virtually odourless
- Excellent primerless adhesion on most surfaces



OPTIONS

290ml Cartridge



Light Grey



SMX® 506


DESCRIPTION

SELF CLEANING GLASS hybrid sealant based on SMX® technology. Chemically neutral and fully elastic. Has been approved according to ISO 11600 G 25 LM. High bond strength on nearly all surfaces. Can be painted with most water based paints. Excellent adhesion on glass, wood, metal and PVCu. Free from isocyanates, solvents, halogens and acids. Flexible elastic rubber with a movement accommodation up to 25%. No bubble formation within sealant in high temperature or humid applications. Primerless adhesion on many substrates. Easy to tool and finish with soapy water. Good extrudability even at low temperatures. Colour stable and UV resistant.

APPLICATIONS

Specially developed for use on all self-cleaning glass including SGG Bioclean and Activ™. Sealing between glass and all traditional frame materials: timber, aluminium, steel and PVC. Glass to glass joints in aluminium systems. Conservatory roof sealing.

- SMX® polymer sealant
- Self cleaning glass compatible
- Independently tested to ISO 11600 G 25 LM
- Approved by Pilkington & Saint Gobain
- UV stable
- Virtually odourless



OPTIONS

290ml Cartridge



White Black



SILIRUB® AQ

DESCRIPTION

HIGH MODULUS acetoxysilane sealant for elastomeric glass bonding, sealing and the construction of aquaria and terraria. Thick bodied and very easy application. Permanent colour, UV resistant. Stays elastic after curing. Very good adhesion on glass. Chemically inert after curing.

APPLICATIONS

Construction and repair of glass aquaria and terraria. Chemically inert after curing so all types of aquaria can be constructed without harm to fish. Bonding of glass to glass constructions such as display cases. Glass to glass sheet sealing such as office partitioning.

- High modulus acetoxysilane cure silicone
- Can be used to seal or bond
- Chemically inert after curing
- 100% silicone with no extension
- Primerless adhesion on most surfaces

OPTIONS

300ml Cartridge



Clear Black

UNIVERSAL PUTTY



DESCRIPTION

LINSEED OIL based putty paste with modified synthetic resins. High quality. Ready mixed and easy to use. No fragmentation or cracking after curing. Can be painted over after drying.

No risk for staining on porous substrates (migration of plasticizer). Excellent toolability.

APPLICATIONS

Traditional glazing applications such as the mounting of single pane glass without glazing beads. Used for the installation of glass into greenhouses. Repairs to previous putty seals around glass panes.

- Linseed oil based putty
- Ready mixed
- Easy to use
- Can be over painted
- Excellent toolability

OPTIONS

500gr Tub



Natural

1kg Tub



Natural





SILIRUB® HT-N

DESCRIPTION

HIGH TEMPERATURE resistant neutral cure silicone sealant. Withstands high temperatures of up to 280°C. Highly flexible and weatherproof. Primerless adhesion on all common construction materials (glass, plastics, masonry substrates, metals and wood). High movement capability. Resistant to UV, rain, snow, ozone and many chemicals.

APPLICATIONS

For the sealing of elastic joints which require a high temperature resistance; gaskets; hot water installations, pipework, ovens, furnaces and chimney flues. Suitable for external and internal applications.

- Neutral cure silicone sealant
- High temperature resistant (up to 280°C)
- External and internal use
- Highly flexible and durable
- Virtually odourless

OPTIONS

300ml Cartridge



Black

SILIRUB® HT-A

DESCRIPTION

HIGH TEMPERATURE resistant acetoxy silicone sealant. Withstands high temperatures of up to 285°C. Highly flexible and weatherproof. Primerless adhesion on many common construction materials (glass, ceramic, porcelain, metals and wood). Resistant to UV, rain, snow, ozone and many chemicals. High movement capability.

APPLICATIONS

For the sealing of elastic joints which require a high temperature resistance; gaskets; hot water installations, pipework, ovens, furnaces and chimney flues. Suitable for external and internal applications.

- Acetoxy cure silicone sealant
- High temperature resistant (up to 285°C)
- External and internal use
- Highly flexible and durable

OPTIONS

300ml Cartridge



Black

FIRECEMENT HT

DESCRIPTION

HIGH TEMPERATURE resistant fire cement. Withstands temperature of up to +1,500°C. Excellent adhesion to a wide range of building materials.

APPLICATIONS

For the sealing of ovens, furnaces and chimney flues. Hard setting. Suitable for internal applications.

- Fire cement
- Internal use
- Hard and durable
- High temperature resistant (up to 1,500°C)

OPTIONS

300ml Cartridge



Black



FIRE SILICONE B1 FR

DESCRIPTION


FIRE RATED neutral cure, silicone sealant. Solvent free. Virtually odourless. Primerless adhesion on all common construction materials (glass, plastics, masonry substrates, metals and wood). High movement capability. Resistant to UV, rain, snow, ozone and many chemicals. High and low temperature resistance. Conforms to all international standards including CE marking.

APPLICATIONS

For use in external and internal passive fire protection systems as an elastic joint sealant; installation of fire retardant window and door frames, fire retardant expansion and connection joints, penetration seals.

- Fire rated neutral cure silicone
- EN13501-1 – Reaction to fire, class E
- ETAG-026 – Part 1, Part 3
- EN1366-4 – Fire resistance, up to 4 hours depending on joint configuration
- BS476 part 20 – Fire resistance, up to 4 hours depending on joint configuration
- Weatherproof
- Highly elastic

OPTIONS

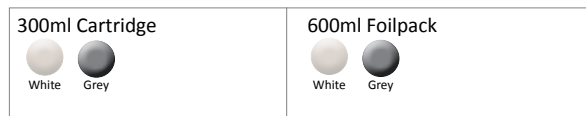

FIRECRYL FR

DESCRIPTION



FIRE RATED intumescent acrylic sealant and filler. Totally solvent, silicone and isocyanate free. Colourfast and waterproof after curing. Can be painted over after curing. Odourless. Primerless adhesion on most construction materials. Conforms to all international standards including CE marking.

APPLICATIONS

For use in internal passive fire protection systems as a joint sealant or filler; installation of fire retardant window and door frames, fire retardant connection joints, penetration seals, internal garages.

- Fire rated acrylic polymer sealant
- EN13501-1 – Reaction to fire, class E
- ETAG-026 – Part 1, Part 3
- EN1366-4 – Fire resistance, up to 4 hours depending on joint configuration
- BS476 part 20 – Fire resistance, up to 4 hours depending on joint configuration
- Paintable with most coatings

OPTIONS

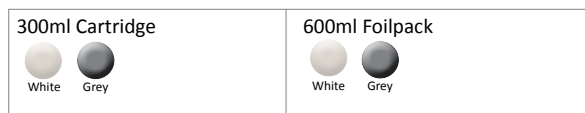



CE	14 NB0749
SOUDAL Dop 230019	
<small>ETA 130280 ETAG N° 026 part 3 0749-CPD-BC1-202-219-130280-01</small>	
SOUDAFOAM FR Linear Joint and Gap Seal Use category 2 <small>See ETA 130280 for other relevant characteristics</small>	

SOUDAFOAM FR

DESCRIPTION

FIRE RATED one component, expanding polyurethane foam filler. Rapid curing. Excellent thermal and acoustic insulation properties. Expands 35-40 times its initial volume. Excellent primerless adhesion on most construction materials. Available in Hand Held, Gun Grade DuraValve and Click & Fix® versions. Conforms to all international standards including CE marking.

APPLICATIONS

For use in passive fire protection systems as a large gap filler; installation of fire retardant window and door frames; sealing of expansion and connection joints, penetration seals.

- Fire rated polyurethane expanding foam filler
- EN13501-1 – Reaction to fire, class E
- ETAG-026 – Part 1, Part 3
- EN1366-4 – Fire resistance, up to 4 hours depending on joint configuration
- BS476 part 20 – Fire resistance, up to 4 hours depending on joint configuration
- Hand Held, Gun Grade and Click & Fix® versions

OPTIONS

- 750ml Hand Held: Pink
- 750ml Gun Grade DuraValve: Pink
- 750ml Click & Fix®: Pink

SOUDASEAL FR

DESCRIPTION

FIRE RATED non-staining, SMX® polymer, sealant and adhesive for use in passive fire protection systems. Totally solvent, silicone and isocyanate free. Highly elastic. Paintable with most coatings. Odourless. Primerless adhesion on most construction materials. Conforms to all international standards including CE marking.

APPLICATIONS

For use in external and internal passive fire protection systems as a joint sealant or adhesive; installation of fire retardant window and door frames, fire retardant expansion and connection joints, penetration seals.

- SMX® polymer sealant & adhesive
- EN13501-1 – Reaction to fire, class E
- ETAG-026 – Part 1, Part 3
- EN1366-4 – Fire resistance, up to 4 hours depending on joint configuration
- BS476 part 20 – Fire resistance, up to 4 hours depending on joint configuration
- Weatherproof
- Paintable with most coatings
- Non staining on porous stone substrates

OPTIONS

600ml Foilpack



Grey

CE	14 NB0749
SOUDAL Dop 230017	
<small>ETA 130280 ETAG N° 026 part 3 0749-CPD-BC1-202-219-130280-01</small>	
SOUDASEAL FR Linear Joint and Gap Seal Use category 2 <small>See ETA 130280 for other relevant characteristics</small>	





SOUDATHERM ROOF 330

DESCRIPTION

SPRAYABLE one-component PU adhesive in large canister format. Used for the efficient, clean, economical and durable bonding of roofing insulation boards onto most underlying roofing substrates, including vapour barriers. The characteristics of this adhesive make it also suitable for uneven surfaces. The adhesive can be applied efficiently and quickly with an adjustable gun system. Covers large areas much quicker than other fixing methods. Ideal for all large scale industrial and construction applications, each canister bonds up to 120M².

APPLICATIONS

Bonding of most common roofing insulation materials such as PIR/ PUR (mineral-coated glass fibre, bituminous glass fibre and aluminium foiled), expanded polystyrene, mineral insulation materials, extruded polystyrene, phenolic foam and mineral wool. These materials can be bonded onto most underlying surfaces; insulation onto insulation (multi-layer), masonry surfaces, steel roof decks, bituminous roofing felts, wooden boards, hard PVC, plaster. Also directly onto vapour barriers, subject to the technical approval of the manufacturer.

- Large canister format sprayable roofing insulation adhesive
- Fast drying
- Fast strength build-up
- High bond strength
- Suitable for most insulation boards and most roofing substrates
- Suitable for uneven surfaces
- Quicker and more efficient than other fixing methods

OPTIONS

10.4 kg Canister: Orange



SOUDATHERM ROOF APPLICATOR GUN



DESCRIPTION

PROFESSIONAL quality, applicator gun with attached hose to use with Soudatherm Roof canister based roofing adhesives. Heavy duty. Can also be used in combination with applicator wand, depending on application. Various barrel lengths available. Long hose length - 200cm. Internal PTFE coating to avoid any curing inside the gun.

APPLICATIONS

Used to apply Soudatherm Roof canister based roofing adhesives.

- Professional quality spray applicator gun with hose
- Used with Soudatherm Roof canister based roofing adhesives
- Heavy duty
- Can be used with applicator wand, depending on application

OPTIONS

Gun: 60cm, 100cm

SOUDATHERM ROOF HOSE



DESCRIPTION

REPLACEMENT hose to use with Soudatherm Roof Applicator Gun. 200cm length. Long lasting and durable.

APPLICATIONS

Used with Soudatherm Roof Applicator Gun.

- Professional quality hose
- Used with Soudatherm Roof Applicator Gun
- Heavy duty
- Long-lasting

OPTIONS

Hose: 200cm

CLEANING ADAPTER RING



DESCRIPTION

METAL cleaning adaptor ring used with Soudafoam Gun & Foam Cleaner to clean Soudatherm Roof Applicator Gun and hoses. Soudafoam Gun & Foam Cleaner screws into ring prior to use.

APPLICATIONS

Used for the cleaning of Soudatherm Roof canister based roofing adhesives from guns and hoses.

- Metal cleaning adaptor ring
- Quick & easy to use with Soudafoam Gun & Foam Cleaner
- Cleans guns and hoses
- Heavy duty

OPTIONS

Cleaning Adaptor: 3 Pack

SOUDATHERM ROOF BACK PACK



DESCRIPTION

BACKPACK especially developed for the efficient use of canisters of Soudatherm Roof adhesive. Holds canisters safely and securely. Less interruptions to work. Faster application of product. Better

movement whilst working on site.

APPLICATIONS

Used to speed up the application of Soudatherm Roof canister adhesives.

- Backpack for canisters of Soudatherm Roof adhesive
- Holds canisters safely and securely
- Speeds up work
- Better movement on site

OPTIONS

Backpack



SOUDATHERM ROOF 250

DESCRIPTION

SPRAYABLE one-component PU adhesive in small canister format. Used for the efficient, clean, economical and durable bonding of roofing insulation boards onto most underlying roofing substrates, including vapour barriers. The characteristics of this adhesive make it also suitable for uneven surfaces. The adhesive can be applied efficiently and quickly with a standard and long length SOUDAFOAM pu foam guns. Covers large areas much quicker than other fixing methods. Ideal for smaller applications, each canister bonds up to 12M².

APPLICATIONS

Bonding of most common roofing insulation materials such as PIR/ PUR (mineral-coated glass fibre, bituminous glass fibre and aluminium foiled), expanded polystyrene, mineral insulation materials, extruded polystyrene, phenolic foam and mineral wool. These materials can be bonded onto most underlying surfaces; insulation onto insulation (multi-layer), masonry surfaces, steel roof decks, bituminous roofing felts, wooden boards, hard PVC, plaster. Also directly onto vapour barriers, subject to the technical approval of the manufacturer.

- Small canister format sprayable roofing insulation adhesive
- Fast drying
- Fast strength build-up
- High bond strength
- Suitable for most insulation boards and most roofing substrates
- Suitable for uneven surfaces
- Quicker and more efficient than other fixing methods

OPTIONS

800ml Gun Grade: Orange

SOUDATHERM ROOF 250 COMBIBOX

DESCRIPTION

MULTI-PACK roofing adhesive kit for projects up to 60M²- each pack contains 5 canisters of Soudatherm Roof 250 roofing adhesive, 1 applicator gun and 1 canister of Soudafoam Gun & Foam cleaner. Used for the bonding of roofing insulation boards onto most underlying roofing substrates, including vapour barriers. The characteristics of this adhesive make it also suitable for uneven surfaces. The adhesive is applied using the Soudafoam PU foam applicator gun supplied in the kit. The gun and any uncured overspills can be cleaned using the Soudafoam Gun & Foam cleaner during and after completion of the project.

APPLICATIONS


Bonding of most common roofing insulation materials such as PIR/ PUR (mineral-coated glass fibre, bituminous glass fibre and aluminium foiled), expanded polystyrene, mineral insulation materials, extruded polystyrene, phenolic foam and mineral wool. These materials can be bonded onto most underlying surfaces; insulation onto insulation (multi-layer), masonry surfaces, steel roof decks, bituminous roofing felts, wooden boards, hard PVC, plaster. Also directly onto vapour barriers, subject to the technical approval of the manufacturer.

- Small canister format sprayable roofing insulation adhesive
- Kit format with gun and cleaner
- Fast strength build-up
- High bond strength
- Suitable for most insulation boards and most roofing substrates
- Suitable for uneven surfaces
- Quicker and more efficient than other fixing methods

OPTIONS

Multi-pack: 5 x 800ml Soudatherm Roof 250 adhesive, 1 x Soudafoam Gun & Foam Cleaner 500ml, 1 x Compact Foam Gun



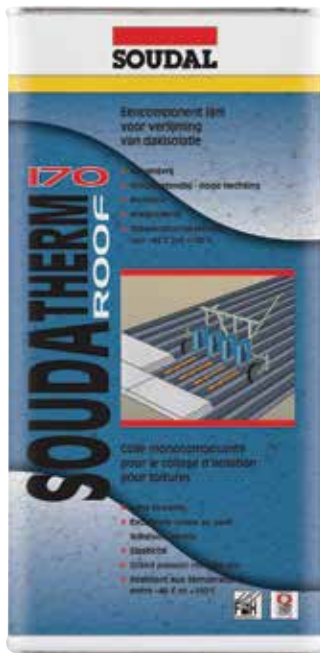

SOUDATHERM ROOF 170

DESCRIPTION

POURABLE liquid, moisture curing, single component, polyurethane adhesive for bonding insulation materials on flat roofs. Totally solvent free, compatible with polystyrene (EPS) and most other roofing insulation boards. Easy-to-use.

APPLICATIONS

Bonding of most common roofing insulation materials such as PIR/PUR (mineral-coated glass fibre, bituminous glass fibre and aluminium foiled), expanded polystyrene, mineral insulation materials, extruded polystyrene, phenolic foam and mineral wool. These materials can be bonded onto most underlying surfaces; insulation onto insulation (multi-layer), masonry surfaces, steel roof decks, bituminous roofing felts, wooden boards, hard PVC, plaster. Also directly onto vapour barriers, subject to the technical approval of the manufacturer.

- Pourable polyurethane roofing insulation adhesive
- Fast strength build-up
- High bond strength
- Suitable for most insulation boards and most roofing substrates
- Quicker and more efficient than other fixing methods

OPTIONS

5.5kg Jerrycan: Yellowish





BUTYRUB

NON-SETTING MASTIC

DESCRIPTION

POLYBUTYLENE based, semi-setting elasto-plastic sealant. Very easy to apply. Forms an elastic and tight skin. Can be painted over after 24 hours. Very good adhesion on many building surfaces. UV and weather resistant. Good resistance against chemicals.

APPLICATIONS

Sealing of low movement joints with limited movement up to 5%. Sealant for joints in masonry, door and window frames, windowsills. Mounting of single layer glass in wooden, concrete and steel frames (e.g. greenhouses). Sealant for joints in car-bodies, containers and caravans. Lap sealant for sheet metal roofing.

- Polybutylene sealant
- Semi-setting
- Paintable with most coatings

OPTIONS

300ml Cartridge



600ml Foilpack



SOUDAFALT

ROOF & GUTTER SEALANT

DESCRIPTION

BITUMEN based classical roof and gutter sealant. Excellent adhesion on bituminous substrates. Good adhesion on many other substrates, even under water. Slump resistant.

APPLICATIONS

Repair product for leaks in roof elements (metal sheeting, roofing felts), gutters and sewage pipes. Cold adhesive for all types of roofing. Emergency repairs, even in wet weather.

- Bitumen based sealant
- Can be used on dry, damp and wet surfaces
- Multi-surface adhesion
- Seals and bonds

OPTIONS

300ml Cartridge



AQUAFIX

ALL WEATHER SEALANT

DESCRIPTION

SOLVENT based plasto-elastic sealant that adheres onto most surfaces even when damp or under water. Ideal as an emergency repair product or as a general sealant where the job must be done even in the rain. Totally transparent. Easy to apply and tool. Highly flexible.

APPLICATIONS

Sealing & bonding of all usual building substrates including polycarbonate, wood metals, plastics, brick, concrete, MDF and glass. Emergency repair of active leaks.

- Solvent based sealant
- Can be used on dry, damp and wet surfaces
- Multi-surface adhesion
- Highly elastic

OPTIONS

300ml Cartridge



SOUDALEAD

LEAD SEALANT


DESCRIPTION

LOW MODULUS neutral cure silicone sealant and filler for use on lead and other metals. Very easy to apply (no mixing). Permanent colour, UV resistant. Stays elastic after curing. Very good adhesion on many materials. Compatible with all lead types. Virtually odourless. Primerless adhesion.

APPLICATIONS

Sealing between lead and other substrates such as treated wood, metal, PVC profiles and glass. Sealing of metal roofing sheets. Building and construction joints. Joints with high movement between different building materials.

- Low modulus neutral cure silicone
- Compatible with all types of lead (milled, cast, rolled etc)
- No mixing, easy to use
- UV resistant



OPTIONS

300ml Cartridge



WATERSTOP

ROOF COATING



DESCRIPTION

ACRYLIC POLYMER based, brushable waterproof coating for instant repair in dry, damp and wet conditions. Ready to use, no mixing needed. Contains synthetic fibres which enhance structural strength. Waterproof and colourfast. Fully elastic when cured. Resistant to UV and temperature variations. Can be applied under all weather conditions. Excellent adhesion to many substrates.

APPLICATIONS

Emergency repair and renovating of flat and pitched roofs, gutters, cupolas etc. under all weather conditions. Waterproofing of cracks in roofing.

- Acrylic polymer based waterproof coating
- Can be used on dry, damp and wet surfaces
- Multi-surface adhesion
- Fully elastic after curing
- UV resistant

OPTIONS

4kg Tin: Grey

BUTYBAND

FLASHING TAPE



DESCRIPTION

BUTYL rubber based, ready to use, self-adhesive, elastoplastic flashing and sealing tape. Fast and excellent adhesion to many substrates. Waterproof. Flexible even when cold. UV and weather resistant. Self-adhesive.

APPLICATIONS

Sealing around chimneys, air vents, skylights, window sills and sliding doors. Universal sealing and repairing tape. Sealing of glass constructions. Sealing in general and metal sheet working (e.g. sealing of sectional elements in metal constructions).

- Butyl based flashing and sealing tape
- Self adhesive
- Waterproof
- Can be cut, shaped and formed
- Lead and aluminium versions

OPTIONS

10m roll: 75mm, 100mm, 150mm, 225mm, 300mm: Lead

10m roll: 75mm, 100mm, 150mm, 225mm, 300mm: Aluminium



SOUDADUCT®

DUCTING SEALANT


DESCRIPTION

HVAC acrylic polymer based, elasto-plastic sealant. Low odour and solvent free. Very good adhesion on galvanised and stainless steel. Remains permanently flexible. Paintable.

APPLICATIONS

Sealing of all types of HVAC duct systems including sheet metal, duct board and flexible ducts. Sealing of seams, spigot joints, flange joints and metal fabrications.

- Acrylic polymer sealant
- Solvent free
- Low odour
- Paintable



OPTIONS

300ml Cartridge



Grey

600ml Foilpack



Grey



SMX®-30 PLUS

DESCRIPTION

PREMIUM QUALITY trowellable, SMX® polymer based, universal parquet adhesive. 100% solids content - solvent and water free. Suitable for bonding many types of parquet floors onto suitable indoor substrates. Very low emissions - conforms to EC-1R PLUS label. Ready to use, single component, no mixing required. Extremely rapid cure and strength build up - load bearing after 2 hours, sandable after 12 hours. Very high final bond strength - more than 2N/mm².

APPLICATIONS

Suitable for indoor bonding of all types of wooden floors such as solid, stab, pre-finished, on-end parquet, wood-plank, wood-block and laminates. Suitable for use on porous and non-porous substrates such as mosaic, anhydrite, concrete, screeds, wood, chipboard and OSB board. Also includes floors with underfloor heating. Plank widths; 180mm with solid wood, 240mm with engineered wood.

- SMX® polymer trowellable parquet adhesive
- Ready to use, single component, low odour
- Solvent, isocyanate and water free - 100% solids content
- EC-1R PLUS label: very low emission
- Load bearing - 2 hours
- Sandable - 12 hours
- High final bond strength - more than 2N/mm²
- Suitable for underfloor heating

OPTIONS

16kg Bucket: Light Brown

3 x 6kg Bag in Bucket: Light Brown



MS-30 PLUS

DESCRIPTION

SUPERIOR QUALITY trowellable, hybrid polymer based, parquet adhesive. 100% solids content - solvent and water free. For bonding many types of parquet onto indoor substrates. Very low emissions - conforms to EC-1R PLUS label. Single component, no mixing required. Very rapid cure

and strength build up - load bearing after 3 hours, sandable after 16 hours. Bond strength - more than 2N/mm².

APPLICATIONS

Suitable for bonding all types of wooden floors; solid, stab, pre-finished, on-end parquet, wood-plank, wood-block and laminates. Suitable for use on porous and non-porous substrates; anhydrite, concrete, screeds, wood, chipboard, OSB board and floors with underfloor heating. Plank widths; 180mm with solid wood, 240mm with engineered wood.

- Hybrid polymer trowellable parquet adhesive
- Ready to use, single component, low odour
- Solvent, isocyanate and water free - 100% solids content
- EC-1R PLUS label: very low emission
- Load bearing - 3 hours
- Sandable - 16 hours
- High final bond strength - more than 2N/mm²
- Suitable for underfloor heating



OPTIONS

6kg, 16kg Bucket: Light Brown

3 x 6kg Bag in Bucket: Light Brown



MS-20 PLUS

DESCRIPTION

HIGH QUALITY trowellable, hybrid polymer based parquet adhesive. 100% solids content - solvent and water free. For bonding many types of parquet onto indoor substrates. Very low emissions - conforms to EC-1R PLUS label. Single component, no mixing required. Rapid cure

and strength build up - load bearing after 8 hours, sandable after 24 hours. Bond strength - more than 1.2N/mm².

APPLICATIONS

Suitable for bonding all types of wooden floors; solid, stab, pre-finished, on-end parquet, wood-plank, wood-block and laminates. Suitable for use on porous and non-porous substrates; anhydrite, concrete, screeds, wood, chipboard, OSB board and floors with underfloor heating. Plank widths; 160mm with solid wood, 200mm with engineered wood.

- Hybrid polymer trowellable parquet adhesive
- Ready to use, single component, low odour
- Solvent, isocyanate and water free - 100% solids content
- EC-1R PLUS label: very low emission
- Load bearing - 8 hours
- Sandable - 24 hours
- High final bond strength - 1.2N/mm²
- Suitable for underfloor heating



OPTIONS

6kg, 16kg Bucket: Light Brown

3 x 6kg Bag in Bucket: Light Brown

SMX®-15 P



DESCRIPTION

SMX® POLYMER based, gunnable, high strength universal parquet adhesive. 100% solids content - free of solvents and water. Suitable for bonding engineered board by means of beads onto suitable indoor substrates. Load bearing and sandable after approximately 48 hours. Shear strength - 3N/mm².

APPLICATIONS

Suitable for indoor bonding of all types of wooden floors such as solid, stab, pre-finished, and on-end parquet, wood-plank, wood-block and laminates. Suitable for use on porous and non-porous substrates such as mosaic, anhydrite, concrete, screeds, wood and chipboard. Also includes floors with underfloor heating. Plank widths of 150mm to 180mm.

- SMX® polymer gunnable parquet adhesive
- Ready to use, single component, low odour
- Solvent, isocyanate and water free - 100% solids content
- Load bearing - 48 hours
- Sandable - 48 hours
- Shear strength - 3N/mm²
- Suitable for underfloor heating

OPTIONS

600ml Foilpack



Light Brown

MS-25P



DESCRIPTION

HYBRID POLYMER based, gunnable, high strength universal parquet adhesive. 100% solids content - free of solvents and water. Suitable for bonding engineered board by means of beads onto suitable indoor substrates. Load bearing and sandable after approximately 48 hours. Shear strength - 3.5N/mm².

APPLICATIONS

Suitable for indoor bonding of all types of wooden floors such as solid, stab, pre-finished, and on-end parquet, wood-plank, wood-block and laminates. Suitable for use on porous and non-porous substrates such as mosaic, anhydrite, concrete, screeds, wood, chipboard and OSB board, including floors with underfloor heating. Plank widths of 150mm to 180mm.

- Hybrid polymer gunnable parquet adhesive
- Ready to use, single component, low odour
- Solvent, isocyanate and water free - 100% solids content
- Load bearing - 48 hours
- Sandable - 48 hours
- Shear strength - 3.5N/mm²
- Suitable for underfloor heating

OPTIONS

600ml Foilpack



Black



PREMIUM LVT ADHESIVE

DESCRIPTION

PREMIUM QUALITY, ready to use, solvent-free dispersion adhesive for bonding of elastic flooring materials to flat, absorbent surfaces.

APPLICATIONS

Used for the bonding of flexible flooring materials such as LVT (luxury vinyl tiles) flooring, PVC tiles and cushion vinyl. Also suitable for rubber floorings, fibre bonded and carpet tiles, textile carpets and linoleum onto porous, flat surfaces such as concrete (screed), levelling compounds and timber.

- Ready to use solvent-free dispersion adhesive
- High initial tack
- Short evaporation time, approx. 10 minutes
- Long open time, approx. 30 minutes
- Very high final strength
- Can be walked over immediately after application
- Heat resistant, can be used with under floor heating
- EC-1 PLUS label: very low emissions
- Complies with EN14259: Adhesives for floor coverings

OPTIONS

13kg Bucket: Light Beige



PU-20P



DESCRIPTION
TWO COMPONENT
 POLYURETHANE based adhesive for parquet and wooden flooring. Very easy to apply. Rapid build up of bond strength. Very high final bond strength. Excellent gap filling characteristics. Does not shrink. Suitable for all kinds of wood, including moisture sensitive types. Not affected by

fungus or bacteria.

APPLICATIONS

Bonding of all types of wooden floors including laminates and exotic timbers. Suitable for use on porous and non-porous surfaces such as concrete, screeds, wood and chipboard. Also includes floors with underfloor heating. Suitable for bonding moisture sensitive wood onto moderately porous surfaces.

- 2 component polyurethane polymer trowellable parquet adhesive
- Suitable for all woods including moisture sensitive types
- Porous and non-porous substrates
- Can be used with underfloor heating

OPTIONS

6kg Box, 4.9kg bucket & 1.1kg tin: Light Brown

SV-15P



DESCRIPTION
 SOLVENT BASED PVAc based parquet adhesive. Suitable for bonding many types of parquet floors onto suitable indoor substrates. One component, ready to use. Free of water. Very easy to apply. Forms stable peaks once applied by a notched trowel or spreader comb. Load bearing after 24

hours, sandable after 48 hours.

APPLICATIONS

Bonding of wooden floors such as solid, stab, pre-finished, on-end parquet, wood-plank, wood-block and laminates. Suitable for use on porous substrates such as concrete, screeds, wood, mosaic, chipboard and OSB board.

- Solvent based PVAc based parquet adhesive
- Suitable for small area wooden flooring
- Porous substrates
- Solvent based

OPTIONS

13kg Tin: Light Brown

DS-10P



DESCRIPTION
 SOLVENT FREE high solid content, dispersion based parquet adhesive for use on porous substrates. Water based. One component, so no mixing required. Long open time (up to 30 minutes). Fast build of strength. Virtually odourless. Load bearing after 24 hours, sandable after 48 hours or 24

hours (if used with nails).

APPLICATIONS

Bonding of parquet, exotic and hard wood flooring materials which are not sensitive to moisture. Bonding onto porous subfloors.

- Solvent free dispersion type parquet adhesive
- Suitable for wood types which are not moisture sensitive
- Porous substrates
- Water based
- Permanently elastic
- Virtually odourless

OPTIONS

15kg Bucket: Light Brown

TROWEL



DESCRIPTION
 Professional quality notched trowel adhesive spreader.

Available in two sizes:

Small bead size (Nr 3) and Large beads size (Nr 11).

OPTIONS

Small NR3

LVT Adhesive - A2

Large NR11

WBPR-11P



DESCRIPTION
 SOLVENT FREE primer for use on porous subfloors. High coverage. Very easy to apply. Fast drying. Binds dust. Increases adhesion on non-porous subfloors. Limits absorption by the subfloor. Dries transparent.

APPLICATIONS
 Preliminary treatment of absorbing and non absorbing mineral subfloors such as cement bounded subfloors, concrete, calcium sulphate bounded (anhydrite) and levelled subfloors. Also

suitable for preliminary treatment of several moisture insensitive mineral subfloors and moisture sensitive non-mineral subfloors such as chipboard, OSB board and wooden subfloors.

- Solvent free universal use surface primer
- Compatible with many Soudal flooring adhesives
- Fast drying and easy to use
- Porous and non-porous substrates

OPTIONS

5L Jerrycan: White

WBPR-21P



DESCRIPTION
 SOLVENT FREE, surface strengthening sealer and primer. Ready to use. High coverage. Very easy to apply. Fast drying. Strengthens sub-floor. Limits absorption by the sub-floor. Binds dust. Dries transparent.

APPLICATIONS
 Preliminary treatment of sandy or powdery (highly) absorbing mineral subfloors such as cement bounded subfloors, concrete, calcium sulphate bounded (anhydrite) and levelled

subfloors.

- Solvent free universal use deep surface strengthening primer
- Compatible with many Soudal flooring adhesives
- Fast drying and easy to use
- Porous substrates

OPTIONS

5L Jerrycan: White

EPR-31P



DESCRIPTION
 TWO COMPONENT EPOXY based sealer. Suppresses residual construction moisture and rising damp. Solvent and water free. Very easy to apply. For critical subfloors. Waterproof and chemical resistant. High bending, shear, compression and tensile strengths. Improves adhesion strength. Suitable for underfloor heating. For indoor and outdoor use.

APPLICATIONS
 Suppresses rising damp and residual construction moisture. Ideally suited for preliminary treatment of sandy or powdery (highly) absorbing mineral subfloors such as cement bounded subfloors, concrete, calcium-sulphate bounded (anhydrite) and levelled subfloors. Also suitable on wooden subfloors, chipboard, terrazzo, ceramic tiles and metal.

- Two component epoxy sealer
- Moisture resistant
- Porous and non-porous substrates
- Suitable for underfloor heating
- High shear, compressive and tensile strengths

OPTIONS

7kg Tin: Brown




PARQUET & TIMBER SEALANT

DESCRIPTION
 HIGH QUALITY water based acrylic polymer, plasto-elastic one component sealant. Ready to use. Solvent free. Very easy to apply. Colourfast and waterproof. Can be varnished after curing. Excellent adhesion on many porous surfaces. Colour range matched to various wood types. Virtually odourless. Conforms to ISO 11600 F 12.5 P.

APPLICATIONS
 Filling sealant for joints in parquet and laminate floors. Connection joints between parquet floors, skirting board and walls. Also suitable for cracks in wooden floors.

- Water based acrylic
- Solvent free
- Fills and seals
- Virtually odourless
- Colour matched to many wood types
- Low odour



OPTIONS

290ml Cartridge





Swipex Super Cleaning **WIPES**

- Cleans hands, tools & surfaces
- Works with silicone, Hybrid Polymers, PU foam and adhesives
- Quick, easy and safe to use
- 100 wipes per tub

DUST SHEETS



DESCRIPTION
HEAVY DUTY cotton calico dust sheet. Genuine cotton twill.

APPLICATIONS
Protect surfaces e.g. floors and furniture from dust and other work debris. Heavy duty, so hardwearing - resists wear from foot traffic, stepladders etc. Machine washable.

- Heavy duty dust sheet
- Genuine cotton twill
- Resistant to foot traffic

OPTIONS

Heavy Duty: 9ft x 12ft
Economy: 9ft x 12ft

STAIR-RUNNER



DESCRIPTION
HEAVY DUTY cotton calico stair runner. Genuine cotton twill.

APPLICATIONS
Protect surfaces e.g. floors and furniture from dust and other work debris. Heavy duty, so hardwearing - resists wear from foot traffic, stepladders etc. Machine washable. Sized for use

on stairways and corridors.

- Heavy duty dust sheet
- Genuine cotton twill
- Sized for use on stairs and corridors
- Resistant to foot traffic

OPTIONS

Sheet: 24ft x 3ft

TISSUE ROLLS



DESCRIPTION
HEAVY DUTY paper cleaning tissues. White colour. 2 Ply. Tear off sheet style. 100% recycled material. Shrink-wrapped.

APPLICATIONS
For all general cleaning applications in construction and industry. Can be used with Soudal cleaning range e.g PVCu frame

cleaner, frame and glass cleaner, glass and mirror cleaner.

- Heavy duty paper cleaning tissues
- White colour
- 2 Ply
- Tear off sheet style
- 100% recycled material

OPTIONS

Rolls: 190mm x 150m, 260mm x 400m

TARPAULIN



DESCRIPTION
WATERPROOF polyethylene tarpaulin for heavy duty construction use. Double laminated fabric. Reinforced or double stitched hems. Rustproof eyelets. 100% waterproof and tear resistant. Non-shrinking. Rot resistant.

APPLICATIONS

Protect surfaces and materials e.g. floors and building materials from dust and other heavy work debris. Extremely heavy duty. Hardwearing - resists all types of weather conditions. Can be used internally and externally.

- Waterproof heavy duty polyethylene tarpaulin
- 100% Waterproof
- Double laminated
- Internal and external use

OPTIONS

Heavy Duty: 9ft x 12ft, 18ft x 12ft
Economy: 18ft x 12ft

PVCu FRAME CLEANER



DESCRIPTION

SOLVENT based cleaner for PVCu materials. Fast acting. Non smear formulation. Removes ingrained dirt.

APPLICATIONS

Suitable for the removal of dirt, pen and pencil marks on all PVCu window and door frames, decorative trims, fascia and cladding. Can also be used on some types of plastic garden furniture.

- Solvent based cleaner
- Fast acting and drying
- Smear free
- Works on PVCu

OPTIONS

1L Bottle: Clear

FRAME & GLASS CLEANER



DESCRIPTION

NON-HAZARDOUS cleaner for use on windows and doors - PVCu and glass materials. Fast acting. Non smear formulation. Removes ingrained dirt. Non-flammable. Environmentally friendly, low VOC. Non-abrasive. Low odour.

APPLICATIONS

Suitable for the removal of dirt, pen and pencil marks on all PVCu materials. Can be used on foiled PVCu. Cleaning all glass surfaces especially in the window industry.

- Non-hazardous cleaner
- Fast acting and drying
- Works on PVCu, foiled PVCu and glass
- Very low VOC
- Non-flammable
- Smear free
- Low odour

OPTIONS

1L Bottle: White

PVCu CREAM CLEANER



DESCRIPTION

SOLVENT FREE cream cleaner for a sparkling finish on PVCu and other materials. Removes ingrained dirt. Can be buffed to a deep and attractive sheen.

APPLICATIONS

The cleaner restores the original sheen to PVCu window and door frames, decorative trims, fascia and claddings. Cleaning all PVCu window frames, trim etc.

- Solvent free cleaner
- Fast acting and drying
- Smear free
- Works on PVCu

OPTIONS

1L Bottle: White

GLASS & MIRROR CLEANER



DESCRIPTION

ALCOHOL based cleaner for the cleaning of different types of glass and mirrors. Fast drying. Non-smear formula. Foil safe.

APPLICATIONS

Cleaning all glass surfaces especially in the window industry. Suitable for use on mirrors.

- Alcohol based cleaner
- Fast acting and drying
- Smear free
- Suitable for glass and mirrors

OPTIONS

1L Bottle: Blue
5L Jerrycan: Blue

25L Jerrycan: Blue

SWIPEX WIPES



DESCRIPTION

HEAVY DUTY non-woven cleaning wipes impregnated with a mixture of solvents, biodegradable non-ionic surfactants and skin emollients.

APPLICATIONS

Designed for the quick and effective removal of adhesives, sealants, oils, paints and greases from hands, tools and non-porous surfaces.

- Heavy duty cleaning wipes
- Removes many types of contaminants
- Suitable for hands and tools
- Kind to skin

OPTIONS

Flowpack: 20 wipes

Tub: 100 wipes

SWIPEX HAND CLEANER



DESCRIPTION

HEAVY DUTY cleaner to remove all kinds of dirt from your hands. Granular texture helps to scrub dirt away. Suitable for removing adhesives, silicone and PU foam. Contains Sericin with moisturiser that protects skin and hands.

APPLICATIONS

Suitable for the removal of adhesives, silicone, PU foam, paint and oil from hands.

- Heavy duty hand cleaner
- Granular texture to help remove dirt quickly
- Fast acting and drying
- Contains Sericin which moisturises hands
- Works on adhesives, PU foam, silicone, paint and oil

OPTIONS

1L Bottle: Red

CLEANER & DEGREASER



DESCRIPTION

Powerful quick-drying cleaner and degreaser for various maintenance and assembly jobs. Can be used on most surfaces (metal, plastics, PVC) and leaves no residue.

APPLICATIONS

Suitable for cleaning and degreasing mechanical parts. Also suitable for the preparation of surfaces prior to the application of sealants or adhesives. For the removal of uncured excess hybrid, PU or silicone sealants, tar residue, grease, wax.

- Cleans and degreases
- Leaves no residue
- Quick-drying
- Aerosol can be used at any angle (360°)

OPTIONS

400ml Aerosol Spray

SEALANT REMOVER



DESCRIPTION

A ready-to-use and fast-working spray based on terpenes for removing hardened silicones and Hybrid Polymers. Can be applied on most surfaces, including aluminium, coatings, ceramics, laminated board, paint and certain plastics.

APPLICATIONS

Removal of old silicone residue, spilled silicone or spilled Hybrid Polymers from different kind of surfaces.

- Fast-working
- Does not drip
- Specifically for silicones and Hybrid Polymers
- Spray action

OPTIONS

400ml Aerosol Spray

ADHESIVE REMOVER



DESCRIPTION

Transparent solvent mixture suitable for removing fresh glue stains and for the cleaning and degreasing of metal surfaces.

APPLICATIONS

Transparent solvent mixture suitable for removing fresh glue stains. Cleans brushes, palette knives and spatulas. Removes excess contact adhesive. Not suitable for polystyrene and Plexiglas. May damage certain surfaces (e.g. plastics).

- Removes fresh glue stains
- Cleans and degreases
- Does not leave residue
- Aerosol can be used at any angle (360°)

OPTIONS

400ml Aerosol Spray



MULTI CLEANER



DESCRIPTION

A universal cleaning foam spray. Foam action helps to break down dirt and contaminants. Foam product means it does not drip or run.

APPLICATIONS

Ideally suited for cleaning vertical surfaces such as glass, tiles, mirrors, laminate, PVC, kitchens, car interiors, textile, carpets, office equipment, etc.

- Cleans and degreases
- Highly soluble
- Does not drip
- Does not leave any residues
- Foam action

OPTIONS

400ml Aerosol Spray

BRAKE CLEANER



DESCRIPTION

Powerful, fast-drying cleaner for brake and clutch parts.

APPLICATIONS

Removes excess brake fluid, excess oil, dirt, etc. quickly. Prevents squeaking brakes and clutch slipping. Easy to apply from all angles and does not corrode metals.

- Cleans and degreases
- Does not drip
- Quick-drying
- Does not corrode metals
- Prevents squeaking sounds
- Aerosol can be used at any angle (360°)

OPTIONS

400ml Aerosol Spray

VASELINE SPRAY

DESCRIPTION

Transparent lubricating and protection spray. Dilutes acids and alkalis, and prevents general wear and tear. High temperature resistance.

APPLICATIONS

Used on metals and plastics to protect against water and weather conditions. Typical applications include door and window hinges, nuts, screws, garden tools and rolling shutters.

- Vaseline based
- Transparent
- Lubricates and protects
- High temperature resistance
- Silicone free
- Aerosol can be used at any angle (360°)



OPTIONS

400ml Aerosol Spray

SILICONE SPRAY

DESCRIPTION

Transparent lubricating and anti-adhesive spray based on high performance silicone oils. Lowers friction and prevents wear and tear on mechanical components. Prevents dirt and grease build up. Very high temperature resistance.

APPLICATIONS

Used on plastics and rubbers to lubricate and protect. Typical applications include sliding doors and rubber seals, lubricating gutter and pipe seals.

- Silicone based
- Transparent
- Lubricates and protects
- Very high temperature resistance
- Aerosol can be used at any angle (360°)



OPTIONS

400ml Aerosol Spray



PTFE SPRAY

DESCRIPTION

High grade PTFE based lubricant. Repels water and dirt. Long life protection against friction and wear. Excellent mechanical and thermal stability. High penetration characteristics.

APPLICATIONS

Used for parts subject to high pressure and temperature loads, especially metals and plastics. Applications include pulleys, chains, gears, ball bearings, conveyer belts and other critical applications.

- PTFE based
- High pressure & temperature resistance
- Long life protection
- Lubricates and protects
- Aerosol can be used at any angle (360°)



OPTIONS

400ml Aerosol Spray

WHITE GREASE

DESCRIPTION

Lithium soap and PTFE based penetrating lubricant and grease. Waterproof. Double action effect; applies like oil, then sets like grease. Anti-corrosive properties.

APPLICATIONS

Suitable for heavy duty lubrication of mechanical parts such as ball bearings, axles, sprockets, conveyer belts and rubber seals.

- Lithium and PTFE based
- Double action oil and grease
- Anti-corrosive
- Heavy duty applications



OPTIONS

400ml Aerosol Spray

MULTI-SPRAY

DESCRIPTION

High grade universal spray with 8-fold action: dust remover, lubricant, cleaner, penetrating oil, anti-corrosive, damp repellent, shock and contact spray. It does not corrode plastics or metals and leaves a protective film on surfaces after use.

APPLICATIONS

Universal use product that can be used on many components such as screws, bolts, nuts, moving parts, axles, hinges, chains and garden tools.

- Universal use spray
- 8-fold action
- Can be used on metals, plastics and rubbers
- Aerosol can be used at any angle (360°)



OPTIONS

400ml Aerosol Spray

ZINC SPRAY (MATT)



DESCRIPTION

High-grade zinc spray with sprayable zinc compound (98% zinc). Has a galvanizing action. Protects zinc and unprocessed iron and steel against corrosion. Due to its cathode action, the spray is very economical and effective. Matt finish.

APPLICATIONS

To be used for coachwork, gutter braces, weld joints and spot welding. Can be used on rust. Good electrical conductor.

- Good resistance against mechanical shocks, rubbing and erosion
- Matt finish
- Suitable for spot welding
- Good electrical conductor

OPTIONS

400ml Aerosol Spray

ZINC SPRAY (SHINY)



DESCRIPTION

High-grade sprayable alu-zinc compound. Alu-Zinc spray has a galvanizing action. Protects zinc and unprocessed iron and steel against corrosion. Due to its cathode action, the spray is very economical and effective.

APPLICATIONS

To be used for coachwork, gutter braces, weld joints and spot welding. Can be used on rust. Good electrical conductor.

- Shiny finishing coat
- Good resistance against mechanical shocks, rubbing and erosion
- Very economic, effective and reliable
- Suitable for spot welding

OPTIONS

400ml Aerosol Spray

CONTACT SPRAY



DESCRIPTION

Universal spray for the cleaning and maintenance of electric contact areas. Dissolves corrosion and oxidation. Reduces humidity. Non corrosive. Suitable for interior and exterior applications.

APPLICATIONS

Suitable for electric contact points such as switches, batteries and light switches. Cleans and deoxidizes surfaces and improves the power transmission at electric contacts. Stops moisture penetration. Also suitable for dehumidifying of electric wirework and tools.

- Universal use
- Reduces humidity and corrosion
- Interior and exterior use
- Aerosol can be used at any angle (360°)



OPTIONS

400ml Aerosol Spray



DEGRIP ALL



DESCRIPTION

A high quality penetrating oil which dissolves rust and corrosion. Superior penetrating characteristics. Protects against rust and corrosion.

APPLICATIONS

Highly efficient in releasing corroded and rusted metal parts such as nuts, bolts and machine parts. Due to the very low surface tension it penetrates into very small openings to release stuck parts. Can be used with machinery, nuts, bolts, flanges, etc.

- Penetrating action
- Dissolves and protects against rust
- For interior and exterior applications
- Aerosol can be used at any angle (360°)



OPTIONS

400ml Aerosol Spray

CUTTING OIL



DESCRIPTION

A high quality oil which prevents overheating of metals when cutting and drilling. Excellent anti-mist characteristics. Silicone free.

APPLICATIONS

Reduces resistance in cutting tools. Suitable for drilling, milling, cutting, sawing, filing, tapping, turning, planing and punching of steel and most ferrous and non-ferrous metals. Reduces friction and wear. Excellent cooling characteristics.

- Non corrosive, does not contain silicones
- Can be used with most metals
- Anti-misting properties
- Aerosol can be used at any angle (360°)



OPTIONS


400ml Aerosol Spray

GENIUS SPRAYS



SPRAY 2 WAYS

- Straw forward: precision application
- Straw downward: wide spray pattern
- Smaller can – more active ingredients
- Premium quality

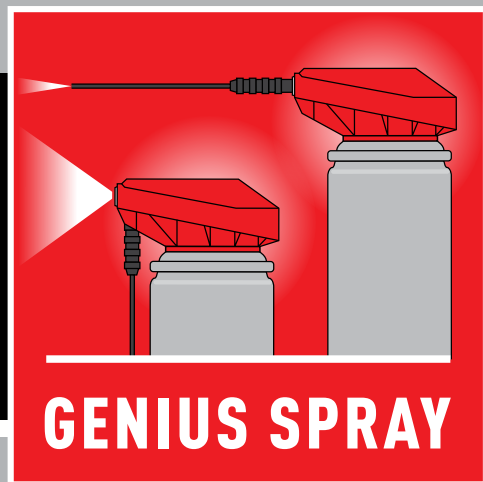

EASY TO USE





PROTECT ALL

DESCRIPTION

High performance lubricating and anti-adhesive spray based on silicone oils. Lowers friction and prevents wear. Combats dirt and grease build up. Very high temperature resistance. Genius spray allows precise extrusion and/or regular spray action. Aerosol can be used at any angle (360°). Contains non-flammable propellant.

APPLICATIONS

Used on plastics and rubbers to lubricate and protect. Typical applications include sliding doors and rubber seals, lubricating gutter and pipe seals.

- Silicone based
- Lubricates and protects
- Very high temperature resistance
- Aerosol can be used at any angle (360°)
- Contains non-flammable propellant.

OPTIONS

300ml Genius Spray



LUBRICATE ALL

DESCRIPTION

High grade PTFE based lubricant. Repels water and dirt. Protects against wear. Excellent mechanical and thermal stability. High penetration characteristics. Genius spray allows precise extrusion and/or regular spray action. Aerosol can be used at any angle (360°). Contains non-flammable propellant. Food safe - Complies to NSF H1.

APPLICATIONS

Used for parts subject to high pressure and temperatures, especially metals and plastics. Applications include pulleys, chains, gears, ball bearings and conveyer belts.

- PTFE and white grease based
- Lubricates and protects
- Aerosol can be used at any angle (360°)
- Contains non-flammable propellant.
- Food safe - Complies to NSF H1

OPTIONS

300ml Genius Spray



ALL IN ONE

DESCRIPTION

Universal spray with 8-fold action: dust remover, lubricant, cleaner, penetrating oil, anti-corrosive, damp repellent, shock and contact spray. Compatible with plastics and metals. Leaves a protective film on surfaces after use. Genius spray allows precise extrusion and/or regular spray action. Aerosol can be used at any angle (360°). Contains non-flammable propellant. Food safe - Complies to NSF H1.

APPLICATIONS

Universal use product that can be used on many components such as screws, bolts, nuts, moving parts, axles, hinges, chains and garden tools.

- Universal use spray
- 8-fold action
- Aerosol can be used at any angle (360°)
- Contains non-flammable propellant.
- Food safe - Complies to NSF H1

OPTIONS

300ml Genius Spray



CLEAN ALL

DESCRIPTION

Powerful cleaner and degreaser for maintenance and assembly jobs. Can be used on most surfaces and leaves no residue. Genius spray allows precise extrusion and/or regular spray action. Aerosol can be used at any angle (360°). Contains non-flammable propellant.

APPLICATIONS

Suitable for cleaning mechanical parts. Also used for the preparation of surfaces prior to the application of sealants or adhesives. For the removal of uncured excess hybrid, PU or silicone sealants, tar residue, grease, wax.

- Cleans and degreases
- Leaves no residue
- Quick-drying
- Aerosol can be used at any angle (360°)
- Contains non-flammable propellant.

OPTIONS

300ml Genius Spray



DEGRIP ALL

DESCRIPTION

A high quality penetrating oil which dissolves rust and corrosion. Superior penetrating characteristics. Aerosol can be used in any angle (360°). Contains non-flammable propellant.

APPLICATIONS

Highly efficient in releasing corroded and rusted metal parts such as nuts, bolts and machine parts. It penetrates into very small openings to release stuck parts. Can be used with machinery, nuts, bolts, flanges, etc.

- Penetrating action
- Dissolves and protects against rust
- For interior and exterior applications
- Aerosol can be used at any angle (360°)
- Contains non-flammable propellant.

OPTIONS

300ml Genius Spray



COLOURSEAL

DESCRIPTION

A high quality general purpose acetoxo cure silicone sealant. Contains anti-fungicidal agents. Very fast skinning time and final cure. Thick bodied remaining permanently flexible, colour fast and UV resistant. Available in a wide variety of colours to match common ceramic tiles and tile grouts.

APPLICATIONS

Sealant suitable for all applications around the home including bathrooms, showers and kitchens. For internal and external use.

- Weatherproof in 1 hour
- For internal and external use
- Resists mould
- Extensive colour range

OPTIONS



GENERAL PURPOSE SILICONE

DESCRIPTION

A high quality general purpose neutral cure silicone sealant. Contains anti-fungicidal agents. Virtually odourless, fast skinning time and final cure. Thick bodied remaining permanently flexible, colour fast and UV resistant.

APPLICATIONS

Sealant suitable for all applications around the home including bathrooms, showers and kitchens, windows and doors. For internal and external use.

- Weatherproof in 1 hour
- For internal and external use
- Excellent adhesion
- Resists mould

OPTIONS



WINDOW & DOOR SILICONE

DESCRIPTION

A high quality neutral cure silicone sealant which remains permanently flexible, colour fast and UV resistant. Excellent adhesion on most building materials including brick, masonry, PVCu, timber and aluminium.

APPLICATIONS

Perimeter sealing of PVCu, timber and aluminium window and door frames, glazing, expansion joints and other interior and exterior sealing applications. Do not use on natural stone, polyethylene (PE), polypropylene (PP). Avoid contact with insulated glass unit sealant.

- Weatherproof in 1 hour
- For internal & external use
- Highly flexible
- Excellent adhesion

OPTIONS



DECORATORS SEALANT

DESCRIPTION

A high quality fast drying water based acrylic sealant which remains flexible and can be painted after 10 minutes. Excellent adhesion on most building materials including plaster, plasterboard, timber, brick, masonry, PVCu and aluminium.

APPLICATIONS

Filling cracks in plaster and concrete. Sealing around skirting boards, window sills, window and door frames and other interior joints. Do not use on natural stone, polyethylene (PE), polypropylene (PP), glass and metal.

- Ready to paint in 10 minutes
- Excellent adhesion
- Smooth Finish
- Interior use

OPTIONS





KITCHEN SEALANT

DESCRIPTION

A high quality polymer based elastomeric sealant especially designed for sealing applications in kitchens. Once cured remains permanently flexible, colour fast and resistant to UV. Neutral cure with excellent adhesion on most building and kitchen materials. Low odour.

APPLICATIONS

Low odour sealant suitable for applications in kitchens areas, including on countertops, tiles, sinks, stainless steel, glass and timber.

- Waterproof in 1 hour
- Highly flexible
- Suitable to use in kitchen areas
- Low odour

OPTIONS

300ml Cartridge



White Clear Black



BATHROOM & SHOWER SILICONE

DESCRIPTION

A premium quality neutral cure anti-mould silicone sealant which remains permanently flexible, colour fast and UV resistant. Excellent adhesion on most building and bathroom materials.

APPLICATIONS

Low odour sealant suitable for all sanitary applications in bathrooms and showers, including around shower trays, baths, basins, sinks, toilets, mirrors, tiles, bathroom panels and countertops. Do not use on natural stone, polyethylene (PE), polypropylene (PP).

- Waterproof in 1 hour
- Anti-mould
- Low odour
- Excellent adhesion

OPTIONS

300ml Cartridge



White Clear Ivory



ROOF & GUTTER SEALANT

DESCRIPTION

Flexible bitumen based sealant for all roofing, gutter repairs and joints. Can be applied under water, on damp surfaces and in cold conditions. Excellent adhesion on all materials including roof, gutter and insulation materials.

APPLICATIONS

Repair product suitable for emergency roof repairs and gutter joints. Can be used for sealing, bonding and filling of roofing materials, including felt, roof sheets, gutters and sewage pipes.

- Waterproof in 10 minutes
- Stop leaks
- Even under water
- Excellent adhesion

OPTIONS

300ml Cartridge



Black



NATURAL STONE SEALANT

DESCRIPTION

A high quality polymer based elastomeric sealant especially designed for sealing applications onto natural stone. Virtually odourless. Fast skinning time and final cure. Excellent adhesion on most kitchen, bathroom and construction materials. Permanently flexible. Does not stain porous natural stones such as marble and granite.


APPLICATIONS

Sealing and bonding of marble and other porous natural stone without the risk of staining. Sealing of natural stone cladding façades.

- Waterproof in 1 hour
- Safe to use on porous stones and marble
- Fast curing
- Excellent adhesion on most surfaces

OPTIONS

300ml Cartridge



Clear Travertine Marble Grey



BUILDING ADHESIVE

DESCRIPTION

Genius Gun Building Adhesive is a fast curing hand held polyurethane adhesive, ideal for bonding all types of insulation materials and boards on walls and roofs. A specially designed patented trigger mechanism ensures precise dosage and removes the need for an additional gun. It is easy to use, can be operated with one hand and is re-useable up to 6-weeks after first use.

APPLICATIONS

All interior and exterior bonding of common building materials on (un)even surfaces. Building Adhesive can be applied on surfaces such as: plasterboard, dry lining, Rockwool, insulation board, bricks, concrete, plaster, wood, metal, aluminium, stone, ceramics, MDF, polystyrene, steel, lead, zinc, polyurethane, laminate, cork, chipboard, timber, bitumen and many more building materials.

- Re-usable
- One-handed operation
- Fast curing
- Vertical and horizontal applications

OPTIONS

750ml Genius Gun®: Orange

PLASTERBOARD ADHESIVE

DESCRIPTION

Genius Gun Plasterboard Adhesive is a fast curing polyurethane adhesive which replaces traditional mortar based adhesives. Perfect for bonding plasterboard to walls. Ready to use without mixing which saves time, effort and money. A specially designed patented trigger mechanism ensures precise dosage. It is very easy to use. It can be operated with one hand and can be stored for up to six weeks between applications.

APPLICATIONS

For the bonding of plasterboard onto walls, but can also be used on dry lining, rockwool, insulation board, bricks, concrete, plaster, wood, metal, aluminium, stone, ceramics, MDF, polystyrene, steel, lead, zinc, polyurethane, laminate, cork and chipboard.

- No mixing
- Fast curing
- Re-usable
- One-handed operation

OPTIONS

750ml Genius Gun®: Orange.





INSULATION FOAM

DESCRIPTION

Specially designed moisture curing polyurethane insulation foam for applications which have high and repetitive movement, or where vibration resistance is required. The specially designed Genius Gun patented trigger mechanism ensures precise dosage and removes the need for an additional gun. Easy to use, can be operated with one hand and is re-useable up to 6-weeks after first use.

APPLICATIONS

Excellent thermal and acoustic insulation around doors and window frames, pipe penetrations, insulation and roofing materials and general construction.

- Re-usable
- One-handed operation
- Flexible
- Excellent thermal & acoustic insulation

OPTIONS

750ml Genius Gun®: Champagne

GAP FILLING FOAM

DESCRIPTION

All-purpose polyurethane foam filler. Moisture curing self-expanding foam with the specially designed Genius Gun patented trigger mechanism that ensures precise dosage and removes the need for an additional gun. Easy to use, can be operated with one hand and is re-useable up to 6-weeks after first use.

APPLICATIONS

General all-purpose filling of holes, gaps and joints. Adheres to all common building materials, resistant to water, heat and ageing. Can be cut, sanded, plastered and painted after full cure. Not UV resistant.

- Re-usable
- One-handed operation
- Fast curing
- Expansion rate - 35 times initial volume

OPTIONS

750ml Genius Gun®: Champagne

500ml Genius Gun®: Champagne





GREEN FIX

DESCRIPTION

SMX® hybrid polymer based, high strength flexible adhesive and sealant for the bonding of artificial grass onto a wide variety of non-porous and porous surfaces. Ideal for the bonding of outer edges and seams of artificial lawn mats and for small scale bonding applications onto terraces and balconies. Can be used inside and outside in all weather conditions, even on damp surfaces. Colour matched with artificial grass.

APPLICATIONS

Specially developed for direct bonding of artificial lawn and suitable for small scale full surface bonding. Not to be used for large scale applications (professional sport fields).

- SMX® hybrid polymer
- Indoor & outdoor use
- UV stable
- Virtually odourless
- Colour matched with artificial grass.



OPTIONS

290ml Cartridge



Grass Green

POOL FIX

DESCRIPTION

SMX® hybrid polymer based, high strength flexible adhesive and sealant for the repair of mosaic tiles and other tiles in the surrounding area of swimming pools. Can also be used to repair small cracks and for the sealing of swimming pool elements. Bonds to most types of surfaces, even when slightly damp.

APPLICATIONS

Specially developed for the repair and fixing of mosaic tiles and swimming pool tiles. Sealing and bonding of swimming pool elements such as skimmers, drains, valves, openings. Temporary repair of small leaks. Repair and strengthening of damaged metal and polyester surfaces. Not to be used for applications in permanent immersion.

- SMX® hybrid polymer
- Permanently flexible
- UV stable
- Virtually odourless
- Aqua transparent blue colour.



OPTIONS

290ml Cartridge



Aqua Blue





METAL FIX

DESCRIPTION

SMX[®] hybrid polymer based, high strength flexible adhesive and sealant with very high initial grab (>150kg/m²). Suitable for the bonding of most metal materials; aluminium, steel, lead, zinc and copper and a wide range of non-porous and porous surfaces; concrete, timber and many types of plastic. No preliminary mechanical fixing required due to high grab properties. Contains aluminium particles which give the product a metallic look and finish.

APPLICATIONS

Specially developed for bonding and sealing applications in the building and metal construction industry. Suitable for bonding vibrating constructions and all types of other flexible bonding applications.

- SMX[®] hybrid polymer
- Contains aluminium particles
- UV stable
- Virtually odourless
- Very high initial grab – more than 150kg/m²



OPTIONS

290ml Cartridge



Metal Grey

ZINC FIX

DESCRIPTION

SMX[®] hybrid polymer based, high strength flexible adhesive and sealant designed specifically for the adhesion of zinc onto zinc and other construction materials such as wood, stone, concrete and brick. Excellent for use in roofing applications on zinc sheeting and other metallic roofing materials – copper, lead, galvanised steel.

APPLICATIONS

Specifically developed for bonding and sealing applications in the building and construction industry. Also excellent for sealing in metal roofing applications.

- SMX[®] hybrid polymer
- Permanently flexible
- UV stable
- Virtually odourless
- Colour matched with zinc



OPTIONS

290ml Cartridge



Zinc Grey





MIRROR FIX

DESCRIPTION

SMX® hybrid polymer based, high strength flexible adhesive and sealant designed for the bonding and sealing of mirrors. Used to bond mirrors (with an acetone safe back panel) to most building materials. Can also be used to seal around mirrors.

APPLICATIONS

Direct bonding of mirrors onto most types of surfaces, including uneven and damp surfaces. Sealing of joints in mirror walls.

- SMX® hybrid polymer
- Permanently flexible
- UV stable
- Virtually odourless
- Compatible with most mirrors



OPTIONS

290ml Cartridge



White



The FIX Range.

- Designed for a variety of specific DIY applications.
- SMX® Hybrid Polymers
- Virtually Odourless.
- UV Stable.



REPAIR EXPRESS PLASTER

DESCRIPTION

HIGH SPEED acrylic polymer based, lightweight repair plaster. For an easy and quick reparation or filling in walls & ceiling e.g. cracks, screw holes etc. Can be applied by trowel or gun. Sandable and over-paintable once dried. Non-shrinking.

APPLICATIONS

For the filling and repair of cracks and small holes in walls and ceilings - plasterboard, concrete, stone, plasterwork, masonry and decorative plaster. For the filling of static joints and cracks in walls and ceilings.

- Acrylic polymer high speed repair plaster
- Smooth finish
- Very fast curing
- Non-shrinking
- Can be sanded after curing
- Paintable
- Very good adhesion on many porous materials

OPTIONS

290ml Cartridge



White

250ml Tub



White



REPAIR EXPRESS CEMENT

DESCRIPTION

HIGH SPEED acrylic polymer based, textured repair cement. For easy and quick reparation or filling of joints and cracks in concrete. Can be applied by trowel or gun. Sandable and over-paintable once dried. Can be used for internal and external applications.

APPLICATIONS

For repairing holes and cracks in concrete and cement. For repairing joints in masonry. Repairing of damages in concrete stairs etc.

- Acrylic polymer high speed repair cement
- Very fast curing
- Excellent adhesion on many mineral surfaces
- Can be used internally and externally
- Textured finish
- Paintable

OPTIONS

290ml Cartridge



Grey

Beige





The Trade range from Soudal is the market leading range of sealants, foams and adhesives for all serious construction projects - building, repair and maintenance. This premium quality offering is focused on completing the work as quick and easy as possible, with reliable long-term performance, but all at affordable pricing levels. All products are application specific and are easy to identify as they are grouped together by application area.



BUILDING SILICONE

DESCRIPTION

High quality low modulus neutral cure silicone sealant. Virtually odourless. Very fast skinning time and final cure. Excellent toolability and primerless adhesion on all common construction materials. High movement capability. Resistant to UV, rain, snow, ozone, high and low temperatures and many chemicals.

APPLICATIONS

Glazing construction and industrial sealing. Perimeter sealing of window, door frame and roofline systems. Can be used in direct contact with all types of glass, except self-cleaning types. Sealing of expansion joints. Roofing seals including lead, roofing slates and fibre-cement. Industrial sealing applications: coated metals, anodized aluminium, stainless steel. HVAC ducting, pipework and drainage joints. General maintenance sealing.

- For internal & external use
- Low odour
- Highly flexible
- Multi-use

OPTIONS

290ml Cartridge

White Clear Teak Black



MULTI-PURPOSE SILICONE

DESCRIPTION

Acetoxy silicone sealant that cures to form a flexible, durable weathertight seal on many common building surfaces, including glass, metals, wood and ceramic tiles. Contains a fungicide that resists mould growth.

APPLICATIONS

General construction, masonry, woodworking & roofing, flooring, baths, showers & sinks, kitchen fittings, ceramic tiles, plumbing, hvac ducting, shop windows and signs, electrical conduit, automotive.

- All weather use
- Mould resistant
- Flexible
- For internal & external use

OPTIONS

270ml Cartridge

Brilliant White Clear Brown Black Grey



DECORATORS CAULK

DESCRIPTION

An acrylic, solvent free dispersion that cures to form a durable, flexible seal. For internal use. Can easily be painted or papered over when dry.

APPLICATIONS

Sealing gaps around internal window and door frames, skirting boards, plasterboard, staircases, architrave and coving.

- Flexible
- Paintable
- Smooth finish
- For interior use

OPTIONS

290ml Cartridge

White Brown Magnolia



GAP FILLER EXPANDING FOAM

DESCRIPTION

Moisture curing, polyurethane expanding foam for all general purpose gap filling. Adheres to most common building materials, resistant to water, heat and ageing. Excellent thermal and acoustic insulation values. Can be cut, sanded, plastered and painted after full cure. Not UV resistant, cover once cured with sealant, paint or plaster. Genius Gun® application for ease of use, also in small pack format for difficult access areas.

APPLICATIONS

Ideal for general filling and insulating of holes, voids, gaps and joints in most construction applications. Adheres to most building materials. Can also be used around window and door frames. Insulation of pipes etc.

- General purpose gap filling
- High thermal & acoustic insulation
- Small pack format available for difficult access areas.
- High gap filling yield
- Hand Held, Gun Grade and Genius Gun® versions

OPTIONS

750ml Hand Held: Champagne	600ml Genius Gun®: Champagne
500ml Hand Held: Champagne	
300ml Hand Held: Champagne	
150ml Hand Held: Champagne	
750ml Gun Grade: Champagne	



FOAM & GUN CLEANER

DESCRIPTION

Aerosol applied, solvent based polyurethane foam cleaner.

APPLICATIONS

Used for the cleaning of PU Foam applicator guns. Gun applied PU Foam valves and uncured PU Foam, can also be quickly and easily removed with the attachable spray nozzle.

- Quick & easy to use
- Attachable spray nozzle
- Solvent based



OPTIONS

500ml: Clear

LIGHTWEIGHT GAP FILLER

DESCRIPTION

Lightweight acrylic polymer based, repair plaster. For an easy and quick reparation or filling in walls & ceilings e.g. cracks, screw holes etc. Can be applied by trowel or gun. Sandable and over-paintable once dried. Non-shrinking.

APPLICATIONS

For the filling and repair of cracks and small holes in walls and ceilings – plasterboard, concrete, stone, plasterwork, masonry and decorative plaster. For the filing of static joints and cracks in walls and ceilings.

- For internal use
- Paintable
- Smooth finish
- Good adhesion



OPTIONS

290ml Cartridge



900ml Tub





BATHROOM & KITCHEN SILICONE

DESCRIPTION

Low modulus sanitary silicone. Contains a powerful anti-fungicidal agent. Very fast skinning time and final cure. Thick bodied. Highly elastic. Primerless adhesion on most common construction materials. Resistant to UV, rain, snow, ozone, and many chemicals. High/low temperature resistance.


APPLICATIONS

For all waterproofing applications where protection against mildew is required, such as the jointing of baths, sinks, toilets, showers, ceramic tiles and plumbing fixtures.

- Flexible
- Mould resistant
- Waterproof
- Fast curing
- Durable

OPTIONS

290ml Cartridge



SANITARY SILICONE

DESCRIPTION

Acetoxy curing silicone specially formulated for use in hot, humid conditions such as bathrooms and kitchens. Cures to form a flexible, durable waterproof seal with good resistance to abrasion and common detergents. Good adhesion to glass (without primer), most acrylics, ceramics, vitreous surfaces, painted surfaces and anodised aluminium.

APPLICATIONS

For all waterproofing applications where protection against mildew is required, such as the jointing of baths, sinks, toilets, showers, kitchen furniture, ceramic tiles and plumbing fixtures.

- Mould resistant
- Fast curing
- Good extrudability
- Durable

OPTIONS

290ml Cartridge



PIPE & PLUMBING EXPANDING FOAM

DESCRIPTION

Moisture curing, polyurethane expanding foam, specifically developed for filling gaps around pipes and other plumbing applications. Adheres to most sanitary and plumbing materials; PVC, CPVC, copper, cast iron, chromed copper and chromed brass. Resistant to water, heat and ageing. Excellent thermal and acoustic insulation values. Can be cut, sanded, plastered and painted after full cure. Not UV resistant, cover once cured with sealant, paint or plaster. Genius Gun® application for ease of use, also in small pack format for difficult access areas.

APPLICATIONS

Ideal for filling and insulating of gaps around pipes and other sanitary applications. Adheres to most pipe materials. Can also be used for other gap filling applications.

- Pipe and plumbing gap filling
- High thermal & acoustic insulation
- Small pack format available for difficult access areas.
- For all types of pipe materials
- Gun Grade and Genius Gun® versions

OPTIONS

750ml Gun Grade: Champagne
 500ml Gun Grade: Champagne
 600ml Genius Gun® MAX: Champagne
 300ml Genius Gun®MAX : Champagne



SEALING STRIPS

DESCRIPTION

WATER RESISTANT self-adhesive tape for sealing the edges of bathtubs, showers and sinks. Adheres to most sanitary materials. Easy to apply as fully self-adhesive.

APPLICATIONS

Used in all traditional sanitary sealing applications instead of sanitary sealants e.g. baths to wall tiles. Can also be used to seal around showers, kitchen worktops, toilets etc. Resistant to prolonged contact with water.

- Resistant to prolonged contact with water
- Easy to apply as fully self-adhesive
- Adheres to most sanitary materials
- Alternative to sanitary sealants.

OPTIONS

Medium - 22 mm x 3.35 m
 Large - 38 mm x 3.35 m



EXTERIOR FRAME SILICONE

DESCRIPTION

Low modulus neutral (LMN) formulation for high movement joints. Fast curing. Flexible and weathertight seal. Adheres to most common building materials including glass, other glazed surfaces, metals, wood, aluminium and PVCu.

APPLICATIONS

Sealing and perimeter pointing of wooden, aluminium and PVCu window and door frames. Sealing and bonding plastic trim and cladding. Glazing, construction and general purpose joint sealing.

- Flexible
- Low odour
- Waterproof
- Fast curing

OPTIONS

270ml Cartridge



White Clear Brown Grey Black



GLAZING SILICONE

DESCRIPTION

Low modulus acetoxo (LMA) silicone that cures rapidly to form a permanently flexible and extremely durable weathertight seal. It bonds strongly to clean uncoated glass, ceramics and glazed or painted surfaces without the need for a primer.

APPLICATIONS

Traditional glazing joints, door and window frames, shop windows, display cases, panels, signs, portable buildings, conservatories, greenhouse, heating, HVAC ducting.

- Low modulus acetoxo
- Weather resistant
- Flexible
- No primer required

OPTIONS

290ml Cartridge



Clear



INTERIOR FRAME SEALANT

DESCRIPTION

High quality acrylic polymer based sealant and filler. Solvent free and virtually odourless. Very easy to apply. Colourfast and waterproof after curing. Very good adhesion on many porous surfaces. Can be painted over after curing.

APPLICATIONS

Sealing of window sills, skirting boards, architraves, plasterboard, brickwork etc. Filling of small cracks in plaster.

- Flexible
- Paintable
- Smooth finish
- Virtually odourless

OPTIONS

290ml Cartridge



White



WINDOW & DOOR EXPANDING FOAM

DESCRIPTION

Moisture curing, polyurethane expanding foam, specifically developed for filling gaps around window and door frames. Adheres to most frame materials; PVCu, aluminium and wood. Resistant to water, heat and ageing. Excellent thermal and acoustic insulation values. Can be cut, sanded, plastered and painted after full cure. Not UV resistant, cover once cured with sealant, paint or plaster. Genius Gun® application for ease of use.

APPLICATIONS

Ideal for filling and insulating of gaps around window and door frames. Adheres to most frame materials. Can also be used for other gap filling applications.

- Window and door frame gap filling
- High thermal & acoustic insulation
- High linear gap filling yield
- For all types of frame materials
- Genius Gun® application for ease of use

OPTIONS

600ml Genius Gun® MAX: Champagne



LEAD SHEET SEALANT

DESCRIPTION

Low modulus neutral cure silicone. Eliminates the need for grouting. Long life. Adhesion to most building materials - all types of lead (BS:EN 12588 (1999) compatible, milled, rolled, sand cast, water-cooled), other metals, brickwork, concrete, granite, marble, slate, cement, stone and roofing tiles. Stain free on most substrates. Lead grey colouring. Non-corrosive. Good UV and weather resistance. Forms a watertight and permanently flexible joint.

APPLICATIONS

Roofing joints. Sealing lead flashing into brick, stone or concrete. Joints on gutters, downpipes and venting. Steel roofing. Sealing overlaps in rigid sheet roofing.

- Excellent adhesion
- Stain free
- Good UV resistance
- Weather resistant

OPTIONS

290ml Cartridge



Grey



ALL WEATHER SEALANT

DESCRIPTION

A specially formulated sealant that provides strong adhesion to most building surfaces, even wet or under water. Suitable materials include wood, glass, aluminium, steel, bitumen, rigid PVC. The product remains flexible, will not crack or slump. Paintable.

APPLICATIONS

Sealing of cracks in typical roofing applications including attic windows, gutters and drainpipes. Emergency repairs during rain including leaks.

- Weather resistant
- Underwater use
- Excellent adhesion
- Paintable

OPTIONS

290ml Cartridge



Clear



ROOF & GUTTER SEALANT

DESCRIPTION

A rubberised, oil based sealant which remains predominantly in a semi-dry, paste like condition. The nature of this product ensures excellent adhesion to most common roofing materials including asphalt, bitumen, felt, metals and wood.

APPLICATIONS

Permanent weatherproofing of roofing applications. Sealing of guttering, downpipes, chimneystacks, lap joints, attic windows, cornices, ventilation ducts and flashings. Bedding of roof sheets and felts. Sealing of bituminous supports.

- Weatherproof
- Excellent adhesion
- Seals roof leaks
- Seals guttering

OPTIONS

290ml Cartridge



Black



ROOF & INSULATION EXPANDING FOAM

DESCRIPTION

Moisture curing, polyurethane expanding foam, specifically developed for filling gaps around roofing and insulation materials. Adheres to most roofing and insulation materials; roof tiles, slates, fibre-cement sheeting, PIR and EPS insulation boards, aluminium and wood. Resistant to water, heat and ageing. Excellent thermal and acoustic insulation values. Can be cut, sanded, plastered and painted after full cure. Not UV resistant, cover once cured with sealant, paint or plaster. Genius Gun® application for ease of use.

APPLICATIONS

Ideal for filling and insulating of gaps around roofing and insulation materials. Adheres to most roofing and insulation materials. Can also be used for other gap filling applications.

- Roof and insulation gap filling
- High thermal & acoustic insulation
- High gap filling yield
- For all types of roofing and insulation materials
- Genius Gun® application for ease of use

OPTIONS

600ml Genius Gun®: Champagne



B1 FIRE & ACOUSTIC EXPANDING FOAM

DESCRIPTION

FIRE RATED one component, expanding polyurethane foam filler. Rapid curing. Excellent thermal and acoustic insulation properties. Excellent primerless adhesion on most construction materials. Available in Hand Held, Gun Grade and Genius Gun® versions.

APPLICATIONS

For use in passive fire protection systems as a large gap filler; installation of fire retardant window and door frames; sealing of expansion and connection joints, penetration seals. Thermal and acoustic insulation around doors and window frames, pipe penetrations, insulation and roofing materials and general construction.

- Fire rated polyurethane foam filler
- EN1366-4 – Fire resistance, up to 4 hours depending on joint configuration
- Fire class DIN 4102 B1
- Acoustic rating - 58 dB
- Insulation factor - 36mW/mK
- Hand Held, Gun Grade and Genius Gun® versions

OPTIONS

- | |
|-------------------------|
| 750ml Hand Held: Blue |
| 750ml Gun Grade: Blue |
| 600ml Genius Gun®: Blue |



B2 FIRE & ACOUSTIC EXPANDING FOAM

DESCRIPTION

FIRE RATED one component, expanding polyurethane foam filler. Rapid curing. Excellent thermal and acoustic insulation properties. Excellent primerless adhesion on most construction materials. Available in Hand Held, Gun Grade and Genius Gun® versions.

APPLICATIONS

For use in passive fire protection systems as a large gap filler; installation of fire retardant window and door frames; sealing of expansion and connection joints, penetration seals. Thermal and acoustic insulation around doors and window frames, pipe penetrations, insulation and roofing materials and general construction.

- Fire rated polyurethane foam filler
- EN1366-4 – Fire resistance, up to 2 hours depending on joint configuration
- Fire class DIN 4102 B2
- Acoustic rating - 58 dB
- Insulation factor - 36mW/mK
- Hand Held, Gun Grade and Genius Gun® versions

OPTIONS

- | |
|------------------------------|
| 750ml Hand Held: Champagne |
| 750ml Gun Grade: Champagne |
| 600ml Genius Gun®: Champagne |





5 MINUTE D4 PU WOOD ADHESIVE LIQUID

DESCRIPTION

POLYURETHANE liquid adhesive. Excellent water resistance. Easy application. Professional quality. Foaming penetration action to fill uneven surfaces. Extra fast drying and strength build up. Water resistance: D4 (DIN EN 204). Can be used on damp wood. 5 minute open time.

APPLICATIONS

Manufacturing of door and window frames that need to meet class D4 according to EN 204. Heavy duty bonding of wooden construction elements. Bonding of insulation materials (including polystyrene). Can also be used on various porous and non-porous substrates such as concrete, bricks and many other common materials in the building industry. General joinery of wooden materials.

- Liquid PU adhesive
- Conforms to DIN EN 204 grade D4
- Foaming action to fill gaps
- 5 minute open time
- Pressing time - 30 minutes
- Extra fast



OPTIONS

750gm Bottle



Brown



30 MINUTE D4 PU WOOD ADHESIVE LIQUID

DESCRIPTION

POLYURETHANE liquid adhesive. Excellent water resistance. Easy application. Professional quality. Foaming penetration action to fill uneven surfaces. Fast drying. Water resistance: D4 (DIN EN 204). Can be used on damp wood. 15-30 minute open time.

APPLICATIONS

Manufacturing of door and window frames that need to meet class D4 according to EN 204. Heavy duty bonding of wooden construction elements. Bonding of insulation materials (including polystyrene). Can also be used on various porous and non-porous substrates such as concrete, bricks and many other common materials in the building industry. General joinery of wooden materials.

- Liquid PU adhesive
- Conforms to DIN EN 204 grade D4
- Foaming action to fill gaps
- 15 - 30 minute open time
- Pressing time - 6 hours



OPTIONS

750gm Bottle



Brown



5 MINUTE D4 PU WOOD ADHESIVE GEL

DESCRIPTION

POLYURETHANE gun applied, thixotropic construction adhesive. Professional quality. Transparent. Extra fast curing. Gap filling characteristics, suitable for uneven surfaces. Waterproof. Conforms to DIN EN 204 grade D4. Solvent free. 5 minute open time.

APPLICATIONS

Manufacturing of door and window frames that need to meet class D4 according to EN 204. Bonding of wooden construction elements. Bonding of insulation materials (including polystyrene). Can also be used on various porous and non-porous substrates such as concrete, bricks and other common materials in the building industry. General joinery of wooden materials.

- Gun applied thixotropic PU adhesive
- Conforms to DIN EN 204 grade D4
- Foaming action to fill gaps
- Transparent
- 5 minute open time
- Pressing time - 1 hour
- Extra fast



OPTIONS

290ml Cartridge



Clear



30 MINUTE D4 PU WOOD ADHESIVE GEL

DESCRIPTION

POLYURETHANE gun applied, thixotropic construction adhesive. Professional quality. Transparent. Fast curing. Gap filling characteristics, suitable for uneven surfaces. Waterproof. Conforms to DIN EN 204 grade D4. Solvent free. 15-30 minute open time.

APPLICATIONS

Manufacturing of door and window frames that need to meet class D4 according to EN 204. Bonding of wooden construction elements. Bonding of insulation materials (including polystyrene). Can also be use on various porous and non-porous substrates such as concrete, bricks and other common materials in the building industry. General joinery of wooden materials.

- Gun applied thixotropic PU adhesive
- Conforms to DIN EN 204 grade D4
- Foaming action to fill gaps
- Transparent
- 15 - 30 minute open time
- Pressing time - 3 hours



OPTIONS

290ml Cartridge



Clear



WATER RESISTANT WOOD GLUE

DESCRIPTION

A one component, humidity resistant, interior and exterior PVA wood adhesive that fulfills the requirements for long term high bond strength. Water resistant to class D3 (EN204).

APPLICATIONS

Suitable for bonding of wood products, MDF, particle board, formica, veneers, oak and tropical hardwood.

- Conforms to DIN EN 204 grade D3
- Odourless
- Fast drying
- High bond strength



OPTIONS

1 ltr Bottle



White

5 ltr Jerrycan



White



GRIP ALL ADHESIVE

DESCRIPTION

High performance, premium grade, fast curing, gap filling, construction adhesive. Grip All has good initial grab in both vertical and horizontal positions. Fast drying. High bond strength. Excellent adhesion to most building surfaces including wood, metals, most plastics, glass, aluminium, concrete, ceramics, plasterboard and breezeblock. Overpaintable.

APPLICATIONS

Fixing battens, window sills, skirting boards, coving, plasterboard, carpet grippers, wall and floorboards and window frames.

- High bond strength
- Instant grip
- Fast cure
- Solvent based

OPTIONS

290ml Cartridge



Beige

MITRE-KIT/ SUPERGLUE



DESCRIPTION

CYANOACRYLATE based high viscosity adhesive with aerosol activator. Particularly useful for production lines and UPVC window trim. Activator reduces blooming and odour. Fast acting. Curing will occur almost instantly. Easy to use. Non-yellowing.

APPLICATIONS

Used in the furniture, timber, kitchen and plastics industries where its instant bonding properties

dramatically reduce assembly times for mitre joints when compared to conventional wood adhesives. The product is also suitable for instant bonding of MDF, rubber, PVCu, metals and most plastics.



- Cyanoacrylate two part adhesive with activator spray
- High bond strength
- High viscosity adhesive
- Can be used on most non-porous substrates

OPTIONS

Mitre-Kit: 50g Bottle & 200ml Aerosol

Superglue: 50g Bottle

Activator: 200ml Aerocel



GRIP ALL SOLVENT FREE ADHESIVE

DESCRIPTION

High performance, premium grade, fast curing, gap filling construction adhesive. Grip All has good initial grab in both vertical and horizontal positions. High bond strength. Excellent adhesion to most building surfaces including wood, metals, most plastics, glass, concrete, ceramics, plasterboard and polystyrene. Dries white. Overpaintable.

APPLICATIONS

Fixing battens, window sills, skirting boards, coving, carpet grippers, edge strips, wall and floorboards and window frames.

- Paintable
- Odourless
- Fast cure
- High strength

OPTIONS

290ml Cartridge



White

METAL PLASTIC STANDARD



DESCRIPTION
GENERAL PURPOSE, high quality, two component polyester body filler for the repair of damaged surfaces (dents, scratches and tears) in metals, wood or polyester. Very easy to mix and apply. Fast curing and can be sanded after about 20 minutes.

APPLICATIONS
 Filling of scratches, tears, dents in metal plates, including zinc and galvanized steel. Repairing scratches, cracks, dents in cars. Repairs of metal, polyester and wooden surfaces. Filling of scratches and dents in wooden surfaces.

- 2-component polyester filler
- General purpose properties, suitable for most applications
- Very easy to apply
- Fast curing
- Long lasting adhesion

OPTIONS

250g Tin: Grey 1kg Tin: Grey	2kg Tin: Grey 3kg Dispenser System Tin: Grey
---------------------------------	---

METAL PLASTIC EXTRA FINE



DESCRIPTION
EXTRA FINE, high quality, two component polyester body filler. Very fine-grained polyester body filler for the finishing of damaged surfaces and as finishing layer prior to painting. Due to its improved sandability and fine grained structure especially suited as a finishing layer.

APPLICATIONS
 Filling of scratches, tears, dents in metal plates, including zinc and galvanized steel. Repairing scratches, cracks, dents in cars. Repairs of metal, polyester and wooden surfaces. Filling of scratches and dents in wooden surfaces.

- 2-component polyester filler
- Extra fine quality suitable as a finishing layer
- Very easy to apply
- Fast curing
- Long lasting adhesion

OPTIONS

1kg Tin: White	2kg Tin: White
----------------	----------------

METAL PLASTIC BLACK



DESCRIPTION
BLACK coloured, high quality, two component polyester body filler. Special bond strength on hard plastic and polyester e.g. as a bumper filler. Also black colour makes it easier to traces unevenness during the sanding process. Very easy to mix and apply. Fast curing and can be sanded after

about 20 minutes.

APPLICATIONS
 Repair of bumpers and other plastic surfaces. Filling of scratches, tears, dents in metal plates, including zinc and galvanized steel. Repairing scratches, cracks, dents in cars. Repairs of metal, polyester and wooden surfaces. Filling of scratches and dents in wooden surfaces.

- 2-component polyester filler
- Improved performance on hard plastics
- Very easy to apply
- Fast curing
- Long lasting adhesion

OPTIONS

2kg Tin: Black

METAL PLASTIC SOFT



DESCRIPTION
SANDABLE, high quality, two component polyester body filler for the repair of damaged surfaces (dents, scratches and tears) in metals, wood or polyester. Very easy to mix and apply. Extra soft finish to allow easier sanding of the finished product. Fast curing and can be sanded after about 20 minutes.

APPLICATIONS
 Filling of scratches, tears, dents in metal plates, including zinc and galvanized steel. Repairing scratches, cracks, dents in cars. Repairs of metal, polyester and wooden surfaces. Filling of scratches and dents in wooden surfaces.

- 2-component polyester filler
- Easier to sand due to soft finish
- Very easy to apply
- Fast curing
- Long lasting adhesion

OPTIONS

1kg Tin: Beige 2kg Tin: Beige

METAL PLASTIC UNIVERSAL



DESCRIPTION
UNIVERSAL application, high quality, two component polyester body filler. Improved performance on zinc and galvanised surfaces. Top quality polyester body filler with excellent adhesion on all types of metals, even when zinc-coated and galvanised. Can be applied in one layer as base and

finishing putty. Very easy to use.

APPLICATIONS
 Filling of scratches, tears, dents in metal plates, including zinc and galvanized steel. Repairing scratches, cracks, dents in cars. Repairs of metal, polyester and wooden surfaces. Filling of scratches and dents in wooden surfaces.

- 2-component polyester filler
- Improved performance on zinc and galvanised surfaces
- Very easy to apply
- Fast curing
- Long lasting adhesion

OPTIONS

2kg Tin: Green

METAL PLASTIC ALU



DESCRIPTION
ALUMINIUM coloured, high quality, two component polyester body filler. Reinforced with aluminium particles for the repair and reinforcement or damaged surfaces in metal and polyester. Suitable for applications which require thicker layers. Very easy to mix and apply. Fast curing and can be sanded after about 20 minutes.

APPLICATIONS
 Filling of scratches, tears, dents in metal plates, including zinc and galvanized steel. Repairing scratches, cracks, dents in cars. Repairs of metal, polyester and wooden surfaces. Filling of scratches and dents in wooden surfaces.

- 2-component polyester filler
- Aluminium reinforced
- Very easy to apply
- Fast curing
- Long lasting adhesion

OPTIONS

2kg Tin: Aluminium



HARDENERS

DESCRIPTION

BPO Hardeners to be used as catalyst for polyester body fillers and resins. Also available for use with Soudal Dispenser System.

APPLICATIONS

Catalyst for polyester resins.

- Catalyst for polyester fillers.

OPTIONS

10g, 15g, 30g, 50g Tube: Red	50g Tube: White	55g Dispenser System Tube: Red
------------------------------	-----------------	--------------------------------

DISPENSER SYSTEM



DESCRIPTION

Soudal Dispenser System is an easy to use application tool to be used with the specialist 3kg Dispenser System packaging of Metal Plastic products. It yields exactly the required quantity of body filler and hardener, with the correct mixing ratio, to make the use of products as easy and quick as possible.

APPLICATIONS

Fast and effective mixing of 2 component polyester fillers.

- Mixer for 2 component polyester fillers.

OPTIONS

Dispenser

SPRAY FILLER



DESCRIPTION

SPRAYABLE, high quality, two component polyester body filler for the repair of damaged surfaces (dents, scratches and tears) in metals, wood or polyester. Developed particularly for all applications which require quick filling of large surface areas. Very fine finish.

APPLICATIONS

Filling of scratches, tears, dents in metal plates, including zinc and galvanized steel. Repairing scratches, cracks, dents in cars. Repairs of metal, polyester and wooden surfaces. Filling of scratches and dents in wooden surfaces.

- 2-component polyester filler
- Sprayable formulation with extra fine finish
- Very easy to apply
- Fast curing
- Long lasting adhesion

OPTIONS

1kg Tin: Grey

CELLUPLAST



DESCRIPTION

NITRO-CELLULOSE finishing putty. Single component finishing putty, especially suited for small repairs and scratches. Also suited as finishing prior to varnishing or spray painting.

APPLICATIONS


Filling of small scratches, tears, dents in metal plates, including zinc and galvanized steel. Repairing scratches, cracks, dents in cars. Repairs of metal, polyester and wooden surfaces. Filling of scratches and dents in wooden surfaces.

- Single component nitro-cellulose filler
- Very easy to apply
- No mixing required
- Long lasting adhesion
- Flexible

OPTIONS

175g Tube: Red	750g Tin: Red.
----------------	----------------

POLY LIQUID

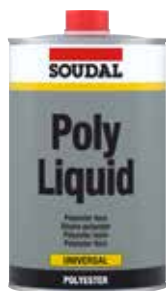

DESCRIPTION
PRE-ACCELERATED two-component polyester resin, to be used with fibreglass mat. Repair of tears, gaps and holes in all metals, wood and polyester surfaces.

APPLICATIONS
Filling of scratches, tears, dents in metal plates, including zinc and galvanized steel. Repairing scratches, cracks, dents in cars. Repairs of metal, polyester and wooden surfaces. Filling of scratches and dents in wooden surfaces.
Repairing of small holes and dents in

car body parts. Replacing or reinforcing of rusted through parts.

- 2-component polyester resin
- Used in conjunction with Fibreglass Matt
- Very easy to apply
- Fast curing
- Long lasting adhesion

OPTIONS

1kg Tin: Brown

POLYFIBER



DESCRIPTION
GENERAL PURPOSE, high quality, glass fibre reinforced, two component polyester body filler for the repair of damaged surfaces (dents, scratches and tears) in metals, wood or polyester. Very easy to mix and apply. Fast curing and can be sanded after about 20 minutes. The glass fibres add additional

strength to weakened body parts.

APPLICATIONS

Heavy duty filling of scratches, tears, dents in metal plates, including zinc and galvanized steel. Repairing scratches, cracks, dents in cars. Repairs of metal, polyester and wooden surfaces. Filling of scratches and dents in wooden surfaces.

- 2-component polyester resin
- Fibre-reinforced for heavy duty applications
- Very easy to apply
- Fast curing
- Long lasting adhesion

OPTIONS

250g Tin: Grey	1kg Tin: Grey
500g Tin: Grey	1.5kg Tin: Grey

POLYSET



DESCRIPTION
READY TO USE all in one, repair set. For larger repair jobs on metals, wood and polyester surfaces. This set consists of pre-accelerated polyester resin, hardener, non-woven fibreglass matting tissue, mixing container, brush and spatula.

APPLICATIONS
Filling of scratches, tears, dents in metal plates, including zinc and galvanized steel. Repairing scratches, cracks, dents in cars. Repairs of metal, polyester and wooden surfaces. Filling of scratches and dents in

wooden surfaces.

- Ready to use all in one, repair set
- Pre-accelerated polyester resin & hardener
- Non-woven fibreglass matting tissue
- Mixing container, brush and spatula
- Different kit sizes

OPTIONS

Small Kit: 250g	Large Kit: 1kg
-----------------	----------------

FIBREGLASS MATT



DESCRIPTION
NON-WOVEN fibreglass matting tissue to be used with Poly Liquid or Polyset for the strengthening of surfaces or the preparation of new parts.

APPLICATIONS
Filling of scratches, tears, dents in metal plates, including zinc and galvanized steel. Repairing scratches, cracks, dents in cars. Repairs of metal, polyester and wooden surfaces. Filling of scratches and dents in wooden surfaces.

- Non-woven fibreglass matting tissue
- Used in conjunction with Poly Liquid or Polyset
- Different pack sizes

OPTIONS

Pack: 0.5m ²	Pack: 1m ²
-------------------------	-----------------------

POLYFIBER CLEAR



DESCRIPTION
TRANSPARENT, high quality, glass fibre reinforced, two component polyester body filler for the repair of damaged surfaces (dents, scratches and tears) in metals, wood or polyester. Pure polyester resin without fillers, reinforced with fibreglass. Very easy to mix and apply. The glass fibres add additional

strength to weakened body parts. Fast curing.

APPLICATIONS

Heavy duty filling of scratches, tears, dents in metal plates, including zinc and galvanized steel. Repairing scratches, cracks, dents in cars. Repairs of metal, polyester and wooden surfaces. Filling of scratches and dents in wooden surfaces.

- Clear 2-component polyester resin
- Fibre-reinforced for heavy duty applications
- Very easy to apply
- Fast curing
- Long lasting adhesion

OPTIONS

1.5kg Tin: Clear



CARBOND 940 FC

DESCRIPTION
POLYURETHANE based sealant and adhesive. Permanently elastic. Watertight. Excellent resistance to many chemicals. Good colour stability, weather and UV resistance. Can be painted with most water based paints. Very good primerless adhesion on many materials such as aluminium, steel, GRP, epoxy coatings etc. Suited for bonding and sealing of aluminium and other metals and polyester.

APPLICATIONS
Elastomeric bonding and sealing in car bodies, caravans and containers. For bonding, car body parts, wheel arch extensions, etc. Replaces the traditional weld or spot weld.

- Polyurethane sealant and adhesive
- Permanently elastic after curing
- Watertight
- Can be painted with most water based paints
- Excellent adhesion on most materials

OPTIONS

300ml Cartridge: Black, Grey, White



CARBOND 955 DG

DESCRIPTION
POLYURETHANE based windscreen adhesive, which remains permanently waterproof. Good resistance to sagging. Very high end strength. Good colour stability, weather and UV resistance. Drive out time of approximately 3 hours. Must be used in combination with Carbond 955 Cleaner/Activator and Primer.

APPLICATIONS
Installing of windscreens in vehicles.

- Polyurethane based windscreen adhesive
- Very high end strength
- Good colour stability, weather and UV resistance
- Drive out time of approximately 3 hours
- Must be used in combination with Carbond 955 Cleaner/Activator and Primer

OPTIONS

300ml Cartridge: Black



CARBOND 955 DG PRIMER

DESCRIPTION
SPECIALIST primer to be used in conjunction with Carbond 955 DG.

APPLICATIONS
Primes surfaces prior to the use of Carbond 955 DG.

- Primes surfaces
- Used with Carbond 955 DG

OPTIONS

30ml Flask



CARBOND 955 DG CLEANER/ACTIVATOR

DESCRIPTION
SPECIALIST cleaner and activator to be used in conjunction with Carbond 955 DG.

APPLICATIONS
Cleans and activates surfaces prior to the use of Carbond 955 DG.

- Cleans and activates surfaces
- Used with Carbond 955 DG

OPTIONS

30ml Flask



GASKET SEAL

DESCRIPTION
HIGH TEMPERATURE resistant gasket sealant. Acetoxy silicone sealant. Withstands high temperatures of up to 285°C. Highly flexible and weatherproof. Replaces gaskets made from cork, felt, fibres, cardboard and rubber in all sizes and dimensions. Remains elastic after full cure. Resistant to many chemicals. High movement capability.

APPLICATIONS
For the sealing of joints which require a high temperature resistance gasket.

- Gasket sealant
- Acetoxy cure silicone sealant
- High temperature resistant (up to 285°C)
- Replaces traditional gaskets
- Highly flexible and durable

OPTIONS

80ml Tube: Red

300ml Cartridge: Red



CARJOINT

DESCRIPTION
NEOPRENE RUBBER based elastic sealant for the sealing of metal parts, which have been mechanically bonded, car body parts, ventilation ducts, etc. Can be painted. High temperature resistance. Stays elastic. Paintable. Watertight. Solvent based.

APPLICATIONS
Sealing of metal parts, which have been mechanically bonded, car body parts, ventilation ducts, etc

- Neoprene rubber based elastic sealant
- Solvent based
- Can be painted
- Highly flexible and durable

OPTIONS

300ml Cartridge: Grey



MS SEAM SEALER

DESCRIPTION
HYBRID POLYMER based sealant for welding seams. Very good resistance against all weather conditions, water, oil and gasoline. Does not contain isocyanates nor silicones. Easy to apply with specialist applicator gun. Can be painted wet-on-wet with waterborn paints. Can be applied in beads as well as wide layers. Can be applied horizontally as well as vertically. Professional OEM-like finish.

APPLICATIONS
For the sealing of car body seams, such as metal overlaps, welded and folded seams, in boot and engine space, in doors and for various seam seals in the automotive and transport industries.

- Hybrid polymer based sealant
- Resists water, fuels and mineral oil
- Permanently elastic
- Excellent adhesion
- Contains no isocyanates or silicones

OPTIONS

290ml Cartridge: Grey, Beige.



CONNECTION RING

DESCRIPTION
CONNECTING RING, which can be applied on other types of pneumatic guns so that these become suitable for the application of Carsealer and MS Seam Sealant.

APPLICATIONS
For the conversion of pneumatic guns into guns suitable to use with Soudal seam sealing products.

- Specialist applicator ring

OPTIONS

Ring

CARSEALER



DESCRIPTION
SYNTHETIC RUBBER based sealant for welding seams. Quick drying. Can be applied horizontally as well as vertically. No filamenting. Resists water, fuels and mineral oil. Permanently elastic. Excellent adhesion. Can be applied in beads as well as wide layers. Available in sprayable and brushable versions. The brushable version can also be applied with airless spraying equipment. The sprayable version is applied using a specialist sealing gun.

APPLICATIONS
For the sealing of car body seams, such as metal overlaps, welded and folded seams, in boot and engine space, in doors and for various seam seals in the automotive and transport industries.

- Synthetic rubber based sealant
- Resists water, fuels and mineral oil
- Permanently elastic
- Excellent adhesion
- Brushable and sprayable versions available

OPTIONS

300ml Cartridge: Grey

1kg Tin: Grey.

MS SEAM SEALER GUN



DESCRIPTION
PNEUMATIC GUN for the application of Carsealer and MS Seam Sealer in beads and in coats.

APPLICATIONS
For the quick application of Soudal seamsealing products.

OPTIONS

Gun

SOUDAFLOOR SL2



DESCRIPTION
TWO-COMPONENT polyurethane based, self-levelling floor coating. High wear resistance. Excellent resistance to many chemicals. Stays elastic. Solvent free. Easy to maintain. To be applied with special roller to prevent air inclusion.

APPLICATIONS
Polyurethane based floor coating for truck floors and for floors in industrial buildings and garages.

- 2 component polyurethane floor coating
- Self-levelling
- High wear resistance
- Solvent free
- Excellent resistance to many chemicals

OPTIONS

10kg Tin: Grey



UNDERBODY PROTECTION

DESCRIPTION

BITUMEN based underbody coating. Solvent based. Absorbs heat and noise. Protects the underbody of cars and trucks and wheel openings. Resistance against rust, oil, grease, water, salt. Available in ready to use aerosol, brushable and gun sprayable versions. The gun sprayable version is applied using an airless spray machine with our pneumatic coating gun.

APPLICATIONS

For the protection of the underbodies of cars and trucks, wheel arches and openings. Forms a protective film against rust, oil, grease, water, salt.

- Bitumen based protective coating
- Solvent based
- Protects against sound and heat
- Excellent resistance against rust, oil, grease, water, salt
- Available in aerosol, brushable and gun sprayable versions

OPTIONS

500ml Aerosol: Black	1kg Tin - Brushable: Black
1kg Tin - Sprayable: Black	5kg Tin - Brushable: Black
5kg Tin - Sprayable: Black	60kg Tin - Brushable: Black

ANTI-GRAVEL



DESCRIPTION

SYNTHETIC RUBBER based stonechip protection coating. Provides a tough elastic film against rust, salt, sand, stones and gravel. Does not contain bitumen nor asphalt. Can be painted or sprayed. Protection for spoilers and the lower part of the car body. Fast curing and paintable. Creates a sound absorbing protective layer. Available in ready to use aerosol and gun sprayable versions. The gun sprayable version is applied using an airless spray machine with our specially developed pneumatic coating gun.

APPLICATIONS

Protects the lower flanks of the car body against stones and corrosion. The film also largely absorbs noise and vibration. Protects below the bumpers and side panels of cars. Anti-resonance product in wheel arches and undersides of cars.

- Synthetic based protective coating
- Bitumen and asphalt free
- Protects against rust, salt, sand, stones and gravel
- Available in aerosol and gun sprayable versions

OPTIONS

500ml Aerosol: Black, Grey	1kg Tin - Sprayable: Black, Grey, White
----------------------------	---

INCOAT ML-WAX



DESCRIPTION

WAX BASED cavity sealant. Highly water repellent. Fast curing. Does not drip. Forms a durable, sticky, waxy film after drying. Corrosion protection for wheel arches and empty cavities. Available in ready to use aerosol and gun sprayable versions. The gun sprayable version is applied using an airless spray machine with our specially developed pneumatic coating gun.

APPLICATIONS

For the protection against rust of cavities in cars. Protection of hollow coachwork spaces such as chassis beams, doors and door jambs, boot and bonnet, wheel arches and other rust sensitive parts.

- Wax based protective coating
- Highly water repellent
- Fast curing
- Does not drip
- Available in aerosol and gun sprayable versions

OPTIONS

1L Tin - Sprayable: Clear
25L Tin - Sprayable: Clear

INCOAT ML



DESCRIPTION

WAX BASED cavity sealant. Highly water repellent. Fast curing. Does not drip. Forms a durable, sticky, waxy film after drying. Corrosion protection for wheel arches and empty cavities. Available in ready to use aerosol and gun sprayable versions. The gun sprayable version is applied using an airless spray machine with our specially developed pneumatic coating gun.

APPLICATIONS

For the protection against rust of cavities in cars. Protection of hollow coachwork spaces such as chassis beams, doors and door jambs, boot and bonnet, wheel arches and other rust sensitive parts.

- Wax based protective coating
- Highly water repellent
- Fast curing
- Does not drip
- Available in aerosol and gun sprayable versions

OPTIONS

500ml Aerosol: Brown	1L Tin - Sprayable: Brown
----------------------	---------------------------

PNEUMATIC COATING GUN



DESCRIPTION

SPECIALIST pneumatic coating applicator gun for use with all Soudal gun sprayable anti-corrosion coatings - Underbody Protection, Anti-Gravel and Incoat ML and Incoat ML-Wax. Vaupel type system.

APPLICATIONS

For the fast application of Soudal anti-corrosion products.

- Can be used with all anti-corrosion products
- Airless and pressured air systems
- Vaupel type

OPTIONS

Gun



WWW.SOUDAL.BIKE



BIKE CLEANER



DESCRIPTION
LIQUID DETERGENT based, professional quality cleaner for the powerful and efficient cleaning of bicycle frames, wheels and handlebars. Removes dried dirt, sand and dust. Excellent cleaning properties. Used diluted with lukewarm water (ratio of about 1:10). Best used with a sponge and a brush for the less accessible places. Non-flammable. Does not contain harmful solvents and acids.

APPLICATIONS
Cleans stubborn dirt and mud on bicycle frames, wheels and handlebars. Suitable use on matt, painted and unpainted surfaces as well as carbon.

- Liquid detergent
- Remove stubborn dirt, sand and dust
- Excellent cleaning properties
- Diluted (mixed with water)
- Non-flammable
- Contains no harmful solvents or acids

OPTIONS

1 Ltr Bottle: Yellow



CHAIN CLEANER



DESCRIPTION
SOLVENT BASED degreaser and cleaner for removing all kinds of dirt, oil, grease and wax from the chain, chainrings, cassette and the front and rear derailleurs. Professional quality. High degreasing power. Suitable for most surfaces; carbon, aluminum and titanium.

APPLICATIONS
Used for the quick and efficient removal of all kinds of dirt, oil, grease and wax from the chain, chainrings, cassette and the front and rear derailleurs.

- Cleaner and degreaser
- Remove dirt, oil, grease and wax
- Solvent based
- Ready for use
- Professional quality

OPTIONS

500ml Genius Spray: Transparent

MUD REMOVER



DESCRIPTION

LIQUID DETERGENT based, ready-to-use, professional quality cleaner for the powerful and efficient cleaning of bicycle frames, wheels and handlebars. Remove dried dirt, sand and dust. Non-flammable and does not contain harmful solvents nor acids.

APPLICATIONS

Cleans stubborn dirt and mud on bicycle frames, wheels and handlebars. Suitable for matt, painted and unpainted surfaces as well as carbon.

- Liquid detergent
- Remove dried dirt, sand and dust
- Excellent cleaning properties
- Ready for use
- Non-flammable
- Contains no harmful solvents or acids

OPTIONS

1 Ltr Trigger Bottle: Green

DISC CLEANER



DESCRIPTION

SOLVENT BASED aerosol applied cleaner for the quick and efficient removal of oil, grease, grit and grime on disc brake rotors and other moving metal surfaces. Cleans and degreases. Leaves no residue after application. Fast drying. Does not corrode metals. The aerosol can be used at any angle (360°) and also has a long nozzle for getting into areas with difficult access.

APPLICATIONS

Professional quality spray applied disc brake rotor cleaner. Removes excess brake fluid, excess oil, dirt, etc. quickly and easily. Easy to apply from all angles and does not corrode metals.

- Solvent based aerosol disc brake rotor cleaner
- Cleans and degreases
- Leaves no residue
- Fast drying
- Does not corrode metals
- Aerosol can be used in any angle (360°)

OPTIONS

400ml Genius Spray: Transparent

PROTECT & POLISH



DESCRIPTION

AEROSOL POLISH used to put a professional quality finishing shine on the bicycle frame. Forms a shiny thin film on the bicycle frame, which acts as a repellent against moisture. Suitable for lacquered surfaces as well for aluminum and carbon. Forms a temporary protection and prevents dirt and grease deposits. Also gives plastics and rubber a glossy finish. Aerosol can be used in any angle (360° application).

APPLICATIONS

Used to protect and polish all types of bicycle frames. Gives a professional quality finish to frames.

- Aerosol protection and finishing spray
- Glossy effect
- Temporary protection of the surface
- Water-repellent
- Reduced dirt deposits
- Rust and corrosion-resistant

OPTIONS

400ml Aerosol: Transparent

BIKE WIPES



DESCRIPTION

EXTRA LARGE wet-cleaning wipes. Specially developed for the quick, easy and professional removal of dirt from bicycles, hands and tools. The wipes will remove grease, sand, oils and many different dirt residues. More effective than water and soap. Excellent degreasing and cleaning properties. Safe to use.

APPLICATIONS

Cleaning of hands, tools and bicycles. Removes all kinds of dirt such as oil, grease, cleaning detergents and wax in a safe manner.

- Extra large wet-cleaning wipes
- Cleans tools, hands and bicycles
- Removes grease and dirt
- Safe to use

OPTIONS

Tub: 50 Wipes



DRY WAX

DESCRIPTION

DRY WAX is a specially formulated professional chain lubricant based on white liquid wax, which dries clear after application. Rust and corrosion-resistant. Ensures that dirt adheres less quickly. The wax penetrates into the innermost parts of the chain and settles in all openings in the chain.

APPLICATIONS

Used to protect and lubricate bicycle chains, jockey wheels, cassettes and chain rings. Can be used for all types of bikes - road, mountain etc.

- Liquid wax based chain lubricant
- Rust and corrosion-resistant
- Ensures that dirt adheres less quickly

OPTIONS

100ml Bottle: White



DRY WEATHER LUBRICANT

DESCRIPTION

DRY WEATHER lubricant based on biodegradable oil. Professional high-quality for lubricating moving parts such as chains, derailleurs, cables, etc. This lubricant is especially designed for use in dry weather. Reduces friction in moving parts. Rust and corrosion-resistant. Biodegradable. Water-repellent. Low viscosity, easy to apply.

APPLICATIONS

Suitable for lubrication of bicycle chains, jockey wheels, cassettes and chain rings. Suitable for dry weather use only. For heavy weathering conditions or off-road riding use WET WEATHER LUBRICANT.

- Dry weather biodegradable oil
- Rust and corrosion-resistant
- Eliminates cracking and squeaking
- Low viscosity and easy to apply
- Reduces friction and wear

OPTIONS

100ml Bottle: Yellowish



WET WEATHER LUBRICANT

DESCRIPTION

WET WEATHER lubricant based on biodegradable oil. Professional high-quality for lubricating moving parts such as chains, derailleurs, cables, etc. This lubricant is especially designed for use in wet weather. Reduces friction in moving parts. Rust and corrosion-resistant. Biodegradable. Water-repellent. Low viscosity, easy to apply.

APPLICATIONS

Suitable for lubrication of bicycle chains, jockey wheels, cassettes and chain rings. Suitable for wet weather use only. For light weathering conditions use DRY WEATHER LUBRICANT.

- Wet weather biodegradable oil
- Rust and corrosion-resistant
- Eliminates cracking and squeaking
- Low viscosity and easy to apply
- Reduces friction and wear

OPTIONS

100ml Bottle: Yellowish



ALL WEATHER LUBRICANT

DESCRIPTION

PTFE based, professional quality, aerosol applied lubricant. Reduces friction in moving parts. Rust and corrosion-resistant. Water-repellent. Aerosol can be used in any angle (360°) and has a long applicator straw for getting into areas with difficult access. Designed for use in all weather conditions thanks to the PTFE additive.

APPLICATIONS

Suitable for lubrication of bicycle chains, jockey wheels, cassette and chain rings and other moving parts. Suitable for all weather conditions.

- PTFE based aerosol lubricant
- Rust and corrosion-resistant
- Eliminates cracking and squeaking
- All weather use
- Reduces friction and wear

OPTIONS

400ml Genius Spray: Transparent

ASSEMBLY PASTE



DESCRIPTION

ASSEMBLY PASTE is a specially developed professional assembly paste for moving parts such as bearings, headset and bottom bracket. Reduces friction and wear on moving parts. This also prevents creaks and squeaks.

APPLICATIONS

Used for moving parts such as headset bearings and bottom bracket bearings to lubricate and reduce wear and friction.

- Professional assembly paste
- Facilitates assembly and disassembly
- Rust and corrosion-resistant
- Eliminates cracking and squeaking
- Water-repellent properties
- Reduces friction and wear

OPTIONS

200ml Tub: Light Brown

CARBON ASSEMBLY PASTE



DESCRIPTION

CARBON ASSEMBLY PASTE made for use on carbon to carbon and carbon to aluminium and steel connections on bicycles. For use on non-moving parts. The granular structure facilitates assembly and disassembly. It also reduces the friction between the carbon components and prevents squeaking.

Increases the friction between carbon parts, as well as aluminium and steel. Also has water repellent properties.

APPLICATIONS

Suitable for the assembly of non-moving parts in carbon, aluminium and steel e.g. seatposts into frames, handlebars and stems. Applications where the torque can be reduced so that damage can be avoided to parts.

- Professional assembly paste
- Facilitates assembly and disassembly
- Granular structure
- Rust and corrosion-resistant
- Eliminates cracking and squeaking.
- Water-repellent properties

OPTIONS

200ml Tub: Anthracite.

SILICONE PASTE



DESCRIPTION

SILICONE PASTE with water-repellent effect. This paste also protects against rust and corrosion. Specially-developed professional quality protection of parts in connection with frames etc e.g. brake and gear cables. Suitable for use on carbon, aluminum, titanium and plastic.

APPLICATIONS

Used for the protection of connecting parts in bicycles e.g. brake and gear cables. Not used for lubrication of moving parts e.g. chain, bearings, headset and bottom bracket.

- Silicone based paste
- Suitable for use on carbon, aluminum, titanium and plastic
- Rust and corrosion-resistant
- Eliminates cracking and squeaking

OPTIONS

200ml Tub: Transparent

BIKE BOX



DESCRIPTION

MULTI PACK containing three different products from the Professional Soudabike range: Soudabike Bike Wipes, Soudabike All Weather Lubricant and Soudabike Bike Cleaner. Also comes with the exclusive Lotto-Soudal team issue bottle.

OPTIONS

Multi-Pack



RED DISPLAY STAND

DESCRIPTION
Red Soudal branded plastic stand. Includes Soudal header card.

DIMENSIONS
Height - 134cm
Width - 58cm
Depth - 40cm
Header card (add to height) - 34cm

UNITS HELD

120 cartridges
112 cans



T-REX FDSU

DESCRIPTION
T-Rex free standing display unit. Includes 3D T-Rex header card.

DIMENSIONS
Height - 94cm
Width - 55cm
Depth - 22cm
Header card (add to height) - 55cm

UNITS HELD

108 cartridges



GENIUS GUN FSDU

DESCRIPTION
Genius Gun free standing display unit. Includes Genius Gun header card.

DIMENSIONS
Height - 125cm
Width - 45cm
Depth - 29cm
Header card (add to height) - 51cm

UNITS HELD

500ml: 96 cans
600ml: 96 cans
750ml: 72 cans



SWIPEX FSDU

DESCRIPTION
SwiPEX cleaning wipes free standing display unit. Includes 3D SwiPEX header card.

DIMENSIONS
Height - 133cm
Width - 47cm
Depth - 36cm
Header card (add to height) - 32cm

UNITS HELD

60 tubs



FIX ALL COUNTER TOP DISPLAY

DESCRIPTION
Fix ALL counter top display unit. Ideal for trade counter promotions.

DIMENSIONS
Height - 43cm
Width - 36cm
Depth - 35cm

UNITS HELD

20 cartridges




PRODUCT CATALOGUE

DESCRIPTION
Soudal product catalogue, with full UK product range. A4.



SILIRUB LEAFLET

DESCRIPTION
Silirub DL Leaflet. Shows the Silirub neutral cure range.

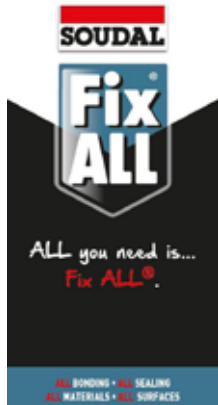

FIX ALL LEAFLET

DESCRIPTION
Fix ALL DL Leaflet. Shows whole Fix ALL Range, including 125ml tubes, Floor & Walls and product selector.



FIX ALL PRODUCT SELECTOR

DESCRIPTION
Fix ALL product selector. A3 Mouse mat, ideal for any trade counter or worktop.



SOUDABOND EASY A4 POSTER

DESCRIPTION
Soudabond Easy A4 side panel for red display stand. Can be used as poster.



SOUDABOND EASY A5 FLYER

DESCRIPTION
Soudabond Easy A5 flyer. Gives brief overview of features and benefits of Soudabond Easy. Perfect to leave on trade counters.



SOUDABOND APPLICATION MANUAL

DESCRIPTION
Soudabond Easy Application Manual booklet. 67 page booklet explaining usage and application of Soudabond Easy.



Soudafoam A4 LEAFLET

DESCRIPTION
Soudafoam A4 Leaflet. Includes the whole Soudafoam range with technical information and product selector.



Soudafoam DL LEAFLET

DESCRIPTION
Soudafoam A4 Leaflet. Includes the whole Soudafoam range and product selector.




BUILDING AIRTIGHTNESS

DESCRIPTION
Building Airtightness A4 booklet. Explains the airtight and watertight properties of SWS (Soudal Window System) products.



Soudatight LIQUID MEMBRANES

DESCRIPTION
Soudatight Liquid Membranes A4 Booklet. Includes Soudatight LQ, SP, Gunable & Hybrid technical information.

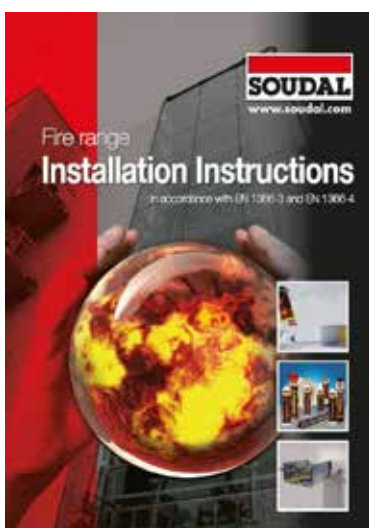

FIRE SOLUTIONS

DESCRIPTION
Fire Solutions A4 Booklet. Shows the entire Soudal fire range, with features, applications and technical information.



Soudatherm ROOF

DESCRIPTION
Soudatherm Roof A4 Leaflet. Shows features, applications and descriptions of the whole Soudatherm Roof range.



TECHNICAL AEROSOLS

DESCRIPTION
 Technical Aerosols
 A4 Booklet. Shows products from Soudal's engineering, cleaning and lubricating Aerosols ranges.



BIKE RANGE

DESCRIPTION
 Soudal Bike Range. As used by Professional Cycling team - Lotto-Soudal.



7" LCD SCREEN

DESCRIPTION
 LCD Screen for Soudal stands and FSDU's.
 Comes with SD card loaded with any of our product or corporate movies.



SOUDAL PRODUCT BOX

DESCRIPTION
 Soudal branded product box. Ideal for tools, loose cartridges, canisters and other storage.
 38cm x 35cm x 40cm.



SOUDAL CARRIER BAG

DESCRIPTION
 Soudal carrier bag.



SOUDAL PEN

DESCRIPTION
 Soudal Pen.



Proud sponsor of





Technical Information

A Guide to CE Marking

Everything you need to know

EN 15651-1 Sealants for façade elements (F)

Non-structural façade sealants that are used in building construction for exterior & interior application.

TYPE: F-INT
Only for indoor use

TYPE: F-EXT-INT
Indoor and outdoor use

TYPE: F-EXT-INT-CC
Indoor and outdoor use; and suitable for use in cold climates.

As an additional identification code, with regard to the maximum total deformation, the elastic or plastic behaviour:

P(plastic), E(elastic) 7.5P, 12.5P, 12.5E
LM (Low Modulus), HM (High Modulus) 20LM, 20HM, 25LM, 25HM

EXAMPLE: F-EXT-INT-CC-25LM

EN 15651-2 Sealants for glazing (G)

Non-structural, elastic joint sealants for sealing of glazing in buildings.

- Glass to glass
- Glass to frame
- Glass to porous substrates

TYPE: G
Joint sealant for sealing glazing.

TYPE: G-CC
Joint sealant for sealing of glazing; and suitable for use in cold climates.

As an additional identification code, with regard to the elasticity and the movement range:

LM (Low Modulus), HM (High Modulus) 20LM, 20HM, 25LM, 25HM

EXAMPLE: G-CC-25LM

EN 15651-3 Sealants for sanitary joints (S)

Sealants for joints inside buildings that are exposed to humidity.

- Bathrooms
- Toilets
- Showers
- Kitchens

TYPE: S1, S2, S3

Joint sealant for sanitary applications

S1 to S3 differ according to the anti-fungal property of the sealant. The best resistance class is the S1, S3 the worst.

TYPE: X

The suffix "X" refers to a low shrinkage of the sealant. Without the designation "X" the shrinkage is higher.

EXAMPLE: XS1

EN 15651-4 Sealants for pedestrian walkways (PW)

Cold applied, non-structural elastic sealants that are used both indoors and outdoors, for joints in floors.

- Floor joints in pedestrian walkways, public areas and areas subject to foot traffic
- Expansion joints between concrete slabs. Such as in balconies, warehouses etc.

TYPE: PW-INT
Only for indoor use


TYPE: PW-EXT-INT
Indoor and outdoor use

TYPE: PW-EXT-INT-CC
Joint sealant for expansion joints in floors for indoor and outdoor use; and for use in cold climates.

As an additional identification code, with regard to the elasticity and the movement range:

LM (Low Modulus), HM (High Modulus) 20LM, 20HM, 25LM, 25HM

EXAMPLE: PW-EXT-INT-CC-25LM

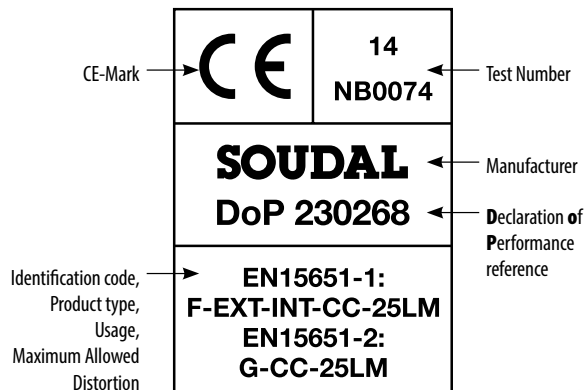

CE Marking Explained

Product Information

EN 15651-1 TYPE F-INT	Joint sealant for façade elements for interior use
EN 15651-1 TYPE F-EXT-INT	Joint sealant for façade elements for interior and exterior use
EN 15651-1 TYPE F-EXT-INT-CC	Joint sealant for façade elements for interior and exterior use (for use in cold climates)
EN 15651-2 TYPE G	Joint sealant for glazing
EN 15651-2 TYPE G-CC	Joint sealant for glazing applications (for use in cold climates)
EN 15651-3 TYPE S	Joint sealant for Sanitary applications
EN 15651-4 TYPE PW-INT	Joint sealant for pedestrian walkways for interior use
EN 15651-4 TYPE PW-EXT-INT	Joint sealant for pedestrian walkways for interior and exterior use
EN 15651-4 TYPE PW-EXT-INT-CC	Joint sealant for pedestrian walkways for interior and exterior use (for use in cold climates)

Maximum Allowed Distortion

Maximum Allowed Distortion: Designation: Material class:	25%		20%		12.5%	7.5%	
	Elastic				Plastic		
	25LM	25HM	20LM	20HM	12.5E	12.5P	7.5P
For sealing façade elements	X	X	X	X	X	X	X
For sealing glazing materials	X	X	X	X			
For sealing of pedestrian walkways	X	X	X	X			

Sealant joint length in linear Metres from a 300ml cartridge.

width (mm)	depth (mm)										
	5	6	7	8	9	10	11	12	13	14	15
5	12.00	10.00	8.57	7.50	6.67	6.00	5.45	5.00	4.62	4.29	4.00
6	10.00	8.33	7.14	6.25	5.56	5.00	4.55	4.17	3.85	3.57	3.33
7	8.57	7.14	6.12	5.36	4.76	4.29	3.90	3.57	3.30	3.06	2.86
8	7.50	6.25	5.36	4.69	4.17	3.75	3.41	3.13	2.88	2.68	2.50
9	6.67	5.56	4.76	4.17	3.70	3.33	3.03	2.78	2.56	2.38	2.22
10	6.00	5.00	4.29	3.75	3.33	3.00	2.73	2.50	2.31	2.14	2.00
11	5.45	4.55	3.90	3.41	3.03	2.73	2.48	2.27	2.10	1.95	1.82
12	5.00	4.17	3.57	3.13	2.78	2.50	2.27	2.08	1.92	1.79	1.67
13	4.62	3.85	3.30	2.88	2.56	2.31	2.10	1.92	1.78	1.65	1.54
14	4.29	3.57	3.06	2.68	2.38	2.14	1.95	1.79	1.65	1.53	1.43
15	4.00	3.33	2.86	2.50	2.22	2.00	1.82	1.67	1.54	1.43	1.33
16	3.75	3.13	2.68	2.34	2.08	1.88	1.70	1.56	1.44	1.34	1.25
17	3.53	2.94	2.52	2.21	1.96	1.76	1.60	1.47	1.36	1.26	1.18
18	3.33	2.78	2.38	2.08	1.85	1.67	1.52	1.39	1.28	1.19	1.11
19	3.16	2.63	2.26	1.97	1.75	1.58	1.44	1.32	1.21	1.13	1.05
20	3.00	2.50	2.14	1.88	1.67	1.50	1.36	1.25	1.15	1.07	1.00
21	2.86	2.38	2.04	1.79	1.59	1.43	1.30	1.19	1.10	1.02	0.95
22	2.73	2.27	1.95	1.70	1.52	1.36	1.24	1.14	1.05	0.97	0.91
23	2.61	2.17	1.86	1.63	1.45	1.30	1.19	1.09	1.00	0.93	0.87
24	2.50	2.08	1.79	1.56	1.39	1.25	1.14	1.04	0.96	0.89	0.83
25	2.40	2.00	1.71	1.50	1.33	1.20	1.09	1.00	0.92	0.86	0.80
26	2.31	1.92	1.65	1.44	1.28	1.15	1.05	0.96	0.89	0.82	0.77
27	2.22	1.85	1.59	1.39	1.23	1.11	1.01	0.93	0.85	0.79	0.74
28	2.14	1.79	1.53	1.34	1.19	1.07	0.97	0.89	0.82	0.77	0.71
29	2.07	1.72	1.48	1.29	1.15	1.03	0.94	0.86	0.80	0.74	0.69
30	2.00	1.67	1.43	1.25	1.11	1.00	0.91	0.83	0.77	0.71	0.67

Application Guide

		CLEANING										LUBRICATING					ENGINEERING					
		PVCu Solvent Cleaner	PVCu Cream Cleaner	Industrial Glass Cleaner	Swipex	Cured PU Foam Remover	Silicone Remover	Brake Cleaner	Multi Cleaner	Cleaner & Degreaser	Adhesive Remover	Sealant Remover	Vaseline Spray	Silicone Spray	Multi Spray	PTFE Spray	White Grease	Zinc Spray (Mat)	Alu-Zinc Spray (Shim)	Contact Spray	Degrip All	Cutting Oil
LUBRICATION	Use up to 200°C											■	■	■	■	■						
	Use up to 250°C																					
	Heavy duty															■	■					
	Rust remover															■				■	■	
PROTECTION	Metal - Plastics (or synthetic material)											■	■	■	■	■						
	Iron - Steel											■	■	■	■	■		■	■	■	■	■
	Rubber												■	■	■							
	Against dirt												■	■	■	■					■	
	Against oxidisation - rust											■	■	■	■	■		■	■	■	■	■
	Against humidity - water											■	■	■	■	■					■	
	Against weak acids - alkalis											■	■	■	■	■						
Against heat															■							
For heavy loads															■	■					■	
CLEANING	Glass - tiles			■	■				■													
	Hands & Tools				■																	
	Paint - coatings				■							■										
	Adhesive										■											
	Electric contacts																				■	
	Plastics - PVC	■	■		■				■	■	■				■							
	Carpet - fabric - textile																					
REMOVAL	Metal - Aluminium				■			■	■	■	■			■								
	Rubber																					
	Grease - Oil				■			■	■	■	■											
	Cured silicone - MS Polymer							■														
	Uncured adhesive				■																	
Cured PU Foam					■																	
Cured contact adhesive											■											

Application Guide

	Fix ALL [®] SMX [®] technology	Silirub [®] Acetoxy Silicones	Silirub [®] Neutral Silicones	Silirub [®] COLOR Service	Silirub [®] 2S	Silirub [®] MA	Butyrub	Soudaseal Hybrid Polymers	Soudaflex [®] Polyurethanes	Transpacy/ Acryrub [®] / Decorators Caulk	Gap Filler	Soudafoam [®] Fillers	SMX [®] 506	Silirub [®] WS	Mir-O-Bond	Soudafalt	Aquafix	T-REX [®] Solvent Based	T-REX [®] Solvent Free
MASONRY (*)																			
concrete/cellular concrete/brick	■		■	■	■	■	■	■	■	■		■	■	■	■	■	■	■	■
fibre cement	■	■	■	■	■	■	■	■	■	■		■	■	■	■	■	■	■	■
granite/marble/natural stone	■					■		■	■	■		■					■	■	■
plaster	■		■	■	■	■		■	■	■		■		■	■		■	■	■
WOOD (*)																			
solid and untreated wood	■							■	■	■		■	■		■	■	■	■	■
fibre board/veneer	■							■	■	■		■			■		■	■	■
GLASS																			
glass	■	■	■	■	■	■							■	■		■	■		
self cleaning glass													■						
layered glass													■	■					
reflective glass	■	■	■	■	■	■							■	■	■		■		
ceramics/porcelain	■	■	■	■	■	■	■	■	■				■	■	■	■	■	■	■
METALS																			
untreated and anodised aluminium	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■
iron and galvanised iron	■		■	■	■	■	■	■	■	■		■	■	■	■	■	■	■	■
stainless steel	■	■	■	■	■	■	■	■	■	■		■	■	■	■	■	■	■	■
copper and copper alloys	■						■	■	■	■		■	■	■	■	■	■	■	■
lead	■		■	■	■	■	■	■	■	■		■		■	■	■	■	■	■
zinc	■		■	■	■	■	■	■	■	■		■		■	■	■	■	■	■
SYNTHETIC MATERIALS																			
PVC	■		■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■
acrylic/fibre glass	■	■	■	■	■	■	■	■	■	■		■		■	■		■	■	■
polycarbonate	■						■	■	■	■		■			■				■
polyester	■	■	■	■	■	■	■	■	■	■		■		■	■		■	■	■
PMMA	■		■	■	■	■	■	■	■	■		■		■	■		■	■	■
OTHERS																			
bitumen							■					■				■	■		
polystyrene	■		■	■	■	■		■		■		■		■	■				■
JOINTS																			
cracks	■						■	■	■	■						■	■		
connection joints	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■		■	■
expansion joints		■	■	■	■	■		■	■	■		■	■	■	■				
APPLICATIONS																			
internal applications	■	■	■	■	■	■		■	■	■	■	■	■	■	■			■	■
external applications	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■
sanitary applications	■	■		■	■	■		■											
damp surface adhesion	■							■		■						■	■		■
food contact					■														
roofing repairs	■											■				■	■		
PAINTABILITY																			
water based paints	■						■		■	■			■						■
solvent based paints									■	■						■			■

■ Suitable. □ Testing advised.

(*) For some applications we recommend an adhesion promoting primer.

Because of the diversity of materials and substrates, and the great number of possible applications which are out of our control, we cannot accept any responsibility for the results obtained. In every case it is recommended to carry out preliminary testing.

Soudal operate a policy of continual development and product improvement and reserve the right to change specifications without notice. E&OE.

® Fix ALL, SMX, SILIRUB, SOUDAFOAM, SOUDASEAL, SOUDAFLEX, ACRYRUB, T-REX, Genius Gun and CLICK & FIX are all registered trade marks of Soudal.

Product Information

PAGE NO.	PRODUCT NAME	SIZE	COLOUR	PACK TYPE	PRODUCT NUMBER	BOX UNITS	PALLET UNITS
AIRTIGHT CONSTRUCTION - WINDOW CONNECTIONS - SWS							
10	Soudaseal® 215 LM	290ml	white	cartridge	135519	12	1440
10	Soudaseal® 215 LM	290ml	teak	cartridge	135523	12	1440
10	Soudaseal® 215 LM	290ml	caramel	cartridge	135524	12	1440
10	Soudaseal® 215 LM	290ml	black	cartridge	135522	12	1440
10	Soudaseal® 215 LM	290ml	RAL7016 anthracite	cartridge	135521	12	1440
10	Soudaseal® 215 LM	290ml	grey	cartridge	135525	12	1440
10	Soudaseal® 215 LM	290ml	travertine	cartridge	135526	12	1440
10	Soudaseal® 215 LM	290ml	portland stone	cartridge	135520	12	1440
10	Soudaseal® 215 LM	290ml	brown	cartridge	107302	12	1440
10	Soudaseal® 215 LM	290ml	concrete grey	cartridge	105023	12	1440
10	Soudaseal® 215 LM	600ml	white	foilpack	102291	12	792
10	Soudaseal® 215 LM	600ml	RAL9001 cream white	foilpack	128316	12	792
10	Soudaseal® 215 LM	600ml	grey	foilpack	106334	12	792
10	Soudaseal® 215 LM	600ml	black	foilpack	103911	12	792
10	Soudaseal® 215 LM	600ml	concrete grey	foilpack	101010	12	792
10	Soudaseal® 215 LM	600ml	brown	foilpack	106333	12	792
10	Soudaseal® 215 LM	600ml	dark brown	foilpack	124409	12	792
10	Soudaseal® 215 LM	600ml	basalt grey	foilpack	103780	12	792
10	Soudaseal® 215 LM	600ml	medium grey	foilpack	106771	12	792
10	Soudaseal® 215 LM	600ml	natural stone beige	foilpack	103011	12	792
10	Soudaseal® 215 LM	600ml	brick red	foilpack	117487	12	792
10	Soudaseal® 215 LM	600ml	dark beige	foilpack	105089	12	792
10	Soudaseal® 215 LM	600ml	RAL7016 anthracite grey	foilpack	124645	12	792
10	Soudaseal® 215 LM	600ml	RAL7039 quartz grey	foilpack	123904	12	792
11	Soudafoam Window & Door SWS Gun Grade	750ml	blue	canister	130577	12	624
11	Acryrub® SWS	310ml	white	cartridge	124483	12	1500
SEALING - NEUTRAL CURE SILICONE							
12	Silirub® 2	300ml	brilliant white	cartridge	114850	24	1440
12	Silirub® 2	300ml	clear	cartridge	114579	24	1440
12	Silirub® 2	300ml	teak	cartridge	114578	24	1440
12	Silirub® 2	300ml	brown	cartridge	121806	24	1440
12	Silirub® 2	300ml	black	cartridge	114577	24	1440
12	Silirub® 2	300ml	caramel	cartridge	114576	24	1440
12	Silirub® 2	300ml	maghogany	cartridge	127153	24	1440
12	Silirub® 2	300ml	toffee	cartridge	121452	24	1440
12	Silirub® 2	300ml	RAL7016 anthracite grey	cartridge	112979	24	1440
12	Silirub® 2	300ml	white	cartridge	102392	15	1500
12	Silirub® 2	300ml	grey	cartridge	102422	15	1500
12	Silirub® 2	300ml	dark grey	cartridge	106197	15	1500
12	Silirub® 2	300ml	alu-grey	cartridge	101270	15	1500
12	Silirub® 2	300ml	portland	cartridge	105962	15	1500
12	Silirub® 2	300ml	beige	cartridge	103978	15	1500
12	Silirub® 2	300ml	stone	cartridge	100335	15	1500
12	Silirub® 2	300ml	concrete grey	cartridge	120489	15	1500
12	Silirub® 2	300ml	oak	cartridge	101080	15	1500
12	Silirub® 2	300ml	light brown	cartridge	102419	15	1500
12	Silirub® 2	300ml	dark brown	cartridge	101940	15	1500
12	Silirub® 2	300ml	terracotta	cartridge	105960	15	1500
12	Silirub® 2	300ml	RAL7012 basalt grey	cartridge	100868	15	1500
12	Silirub® 2	300ml	buff	cartridge	105961	15	1500

PAGE NO.	PRODUCT NAME	SIZE	COLOUR	PACK TYPE	PRODUCT NUMBER	BOX UNITS	PALLET UNITS
12	SILIRUB® 2	300ml	bronze	cartridge	102423	15	1500
12	SILIRUB® 2	600ml	brilliant white	foilpack	100727	12	792
12	SILIRUB® 2	600ml	white	foilpack	100251	12	792
12	SILIRUB® 2	600ml	clear	foilpack	104073	12	792
12	SILIRUB® 2	600ml	grey	foilpack	100252	12	792
12	SILIRUB® 2	600ml	black	foilpack	100253	12	792
12	SILIRUB® 2	600ml	brown	foilpack	100254	12	792
12	SILIRUB® LMN	300ml	brilliant white	cartridge	114574	24	1440
12	SILIRUB® LMN	300ml	white	cartridge	123207	24	1440
12	SILIRUB® LMN	300ml	clear	cartridge	114573	24	1440
12	SILIRUB® LMN	300ml	teak	cartridge	120348	24	1440
12	SILIRUB® LMN	300ml	brown	cartridge	120346	24	1440
12	SILIRUB® LMN	300ml	black	cartridge	120349	24	1440
12	SILIRUB® LMN	300ml	caramel	cartridge	120480	24	1440
12	SILIRUB® LMN	300ml	bronze	cartridge	120347	24	1440
12	SILIRUB® LMN-THICKENED	300ml	brilliant white - thickened	cartridge	115127	24	1440
12	SILIRUB® LMN	300ml	chartwell green	cartridge	130257	24	1440
12	SILIRUB® LMN	300ml	RAL9001 cream white	cartridge	130256	24	1440
12	SILIRUB® LMN	300ml	RAL7016 anthracite grey	cartridge	130268	24	1440
12	SILIRUB® LMN	300ml	grey	cartridge	122402	24	1440
12	SILIRUB® LMN	400ml	white	foilpack	126526	25	1500
12	SILIRUB® LMN	400ml	clear	foilpack	126525	25	1500
12	SILIRUB® LMN	400ml	teak	foilpack	126527	25	1500
12	SILIRUB® LMN	400ml	caramel	foilpack	126523	25	1500
12	SILIRUB® LMN	400ml	black	foilpack	134882	25	1500
12	SILIRUB® LMN	400ml	RAL7016 anthracite	foilpack	134883	25	1500
13	SILIRUB® LM	300ml	brilliant white	cartridge	128335	24	1440
13	SILIRUB® LM	300ml	clear	cartridge	127926	24	1440
13	SILIRUB® LM	300ml	teak	cartridge	128333	24	1440
13	SILIRUB® LM	300ml	caramel	cartridge	128336	24	1440
13	SILIRUB® LM	300ml	black	cartridge	128334	24	1440
13	SILIRUB® LM	300ml	brown	cartridge	128337	24	1440
13	SILIRUB® N	300ml	brilliant white	cartridge	118985	24	1440
13	SILIRUB® N	300ml	white	cartridge	117856	24	1440
13	SILIRUB® N	300ml	clear	cartridge	117857	24	1440
13	SILIRUB® N	300ml	teak	cartridge	117858	24	1440
13	SILIRUB® N	300ml	brown	cartridge	117859	24	1440
13	SILIRUB® N	300ml	caramel	cartridge	122400	24	1440
13	SILIRUB® N	300ml	black	cartridge	122401	24	1440
13	SILIRUB® N	400ml	white	foilpack	123168	25	1500
13	SILIRUB® N	400ml	clear	foilpack	109689	25	1500
SEALING - ALCOXY NEUTRAL CURE SILICONE							
14	SILIRUB® AL	300ml	white	cartridge	120648	24	1440
14	SILIRUB® AL	300ml	clear	cartridge	120647	24	1440
14	SILIRUB® AL	300ml	grey	cartridge	120649	24	1440
14	SILIRUB® AL	300ml	stone	cartridge	120650	24	1440
14	SILIRUB® AL	300ml	bronze	cartridge	120652	24	1440
14	SILIRUB® AL	300ml	black	cartridge	120653	24	1440
14	SILIRUB® AL	300ml	brown	cartridge	120651	24	1440
14	SILIRUB® AL	600ml	clear	foilpack	112474	12	792
SEALING - COLOUR SERVICE							
14	SILIRUB® COLOR	300ml	any RAL colour	cartridge	see list	15	1500

Product Information

PAGE NO.	PRODUCT NAME	SIZE	COLOUR	PACK TYPE	PRODUCT NUMBER	BOX UNITS	PALLET UNITS
14	SILIRUB® COLOR	300ml	RAL1002 sand yellow	cartridge	119643	15	1500
14	SILIRUB® COLOR	300ml	RAL1013 oyster white	cartridge	105822	15	1500
14	SILIRUB® COLOR	300ml	RAL1015 light ivory	cartridge	105827	15	1500
14	SILIRUB® COLOR	300ml	RAL3004 purple red	cartridge	115681	15	1500
14	SILIRUB® COLOR	300ml	RAL3005 wine red	cartridge	105828	15	1500
14	SILIRUB® COLOR	300ml	RAL3007 black red	cartridge	115304	15	1500
14	SILIRUB® COLOR	300ml	RAL3020 traffic red	cartridge	114294	15	1500
14	SILIRUB® COLOR	300ml	RAL5010 gentian blue	cartridge	114299	15	1500
14	SILIRUB® COLOR	300ml	RAL5011 steel blue	cartridge	105829	15	1500
14	SILIRUB® COLOR	300ml	RAL6005 moss green	cartridge	114104	15	1500
14	SILIRUB® COLOR	300ml	RAL6009 fir green	cartridge	105830	15	1500
14	SILIRUB® COLOR	300ml	RAL6022 olive drab	cartridge	114298	15	1500
14	SILIRUB® COLOR	300ml	RAL7006 beige grey	cartridge	115028	15	1500
14	SILIRUB® COLOR	300ml	RAL7011 iron grey	cartridge	114481	15	1500
14	SILIRUB® COLOR	300ml	RAL7012 basalt grey	cartridge	115682	15	1500
14	SILIRUB® COLOR	300ml	RAL7015 slate grey	cartridge	116060	15	1500
14	SILIRUB® COLOR	300ml	RAL7016 anthracite grey	cartridge	105831	15	1500
14	SILIRUB® COLOR	300ml	RAL7021 grey black	cartridge	115271	15	1500
14	SILIRUB® COLOR	300ml	RAL7022 umbra grey	cartridge	114267	15	1500
14	SILIRUB® COLOR	300ml	RAL7030 stone grey	cartridge	113159	15	1500
14	SILIRUB® COLOR	300ml	RAL7032 pebble grey	cartridge	110727	15	1500
14	SILIRUB® COLOR	300ml	RAL7035 light grey	cartridge	118489	15	1500
14	SILIRUB® COLOR	300ml	RAL7039 quartz grey	cartridge	113228	15	1500
14	SILIRUB® COLOR	300ml	RAL8003 clay brown	cartridge	116305	15	1500
14	SILIRUB® COLOR	300ml	RAL8007 fawn brown	cartridge	121808	15	1500
14	SILIRUB® COLOR	300ml	RAL8014 sepia brown	cartridge	114296	15	1500
14	SILIRUB® COLOR	300ml	RAL8017 chocolate brown	cartridge	114750	15	1500
14	SILIRUB® COLOR	300ml	RAL9001 cream white	cartridge	105870	15	1500
14	SILIRUB® COLOR	300ml	RAL9006 aluminium white	cartridge	106735	15	1500
14	SILIRUB® COLOR	300ml	RAL9007 grey aluminium	cartridge	111713	15	1500
14	SILIRUB® COLOR	300ml	RAL9010 pure white	cartridge	118401	15	1500
SEALING - HYBRID POLYMER & NEUTRAL CURE SANITARY SEALANTS							
16	SODASEAL® CLEAN ROOM	290ml	white	cartridge	112302	12	1560
16	STAY FRESH	300ml	ice white	cartridge	125788	12	1488
16	STAY FRESH	300ml	clear	cartridge	125925	12	1488
16	STAY FRESH	300ml	ivory	cartridge	125924	12	1488
16	SILIRUB® 2S	300ml	brilliant white	cartridge	107544	15	1500
16	SILIRUB® 2S	300ml	white	cartridge	101989	15	1500
16	SILIRUB® 2S	300ml	clear	cartridge	101990	15	1500
16	SILIRUB® 2S	300ml	RAL1015 light ivory	cartridge	103734	15	1500
16	SILIRUB® 2S	300ml	grey	cartridge	104846	15	1500
16	SILIRUB® 2S	300ml	RAL7038 light grey	cartridge	102307	15	1500
16	SILIRUB® 2S	300ml	jasmine	cartridge	102772	15	1500
16	SILIRUB® 2S	300ml	RAL9006 aluminium white	cartridge	104205	15	1500
16	SILIRUB® 2S	300ml	RAL9002 grey white	cartridge	105549	15	1500
16	SILIRUB® 2S	300ml	transparent grey	cartridge	105758	15	1500
16	SILIRUB® 2S	300ml	silver grey	cartridge	109034	15	1500
16	SILIRUB® 2S	300ml	concrete grey	cartridge	116521	15	1500
16	SILIRUB® 2S	300ml	bahama beige	cartridge	105753	15	1500
16	SILIRUB® 2S	300ml	RAL9001 cream white	cartridge	105665	15	1500
SEALING - ACETOXY CURE SILICONE WITH FUNGICIDE							
17	SILIRUB® 1	300ml	brilliant white	cartridge	104836	15	1500

PAGE NO.	PRODUCT NAME	SIZE	COLOUR	PACK TYPE	PRODUCT NUMBER	BOX UNITS	PALLET UNITS
17	SILIRUB® 1	300ml	clear	cartridge	104835	15	1500
17	SILIRUB® S	300ml	white	cartridge	101533	15	1500
17	SILIRUB® S	300ml	clear	cartridge	101533	15	1500
17	SILIRUB® S	300ml	grey	cartridge	101533	15	1500
17	SILIRUB® S	300ml	brown	cartridge	102730	15	1500
17	SILIRUB® S	300ml	black	cartridge	101550	15	1500
17	SILIRUB® A	300ml	brilliant white	cartridge	114571	24	1440
17	SILIRUB® A	300ml	white	cartridge	122406	24	1440
17	SILIRUB® A	300ml	clear	cartridge	114570	24	1440
17	SILIRUB® A	300ml	brown	cartridge	122404	24	1440
17	SILIRUB® A	300ml	black	cartridge	122405	24	1440
17	SILIRUB® A	300ml	grey	cartridge	122403	24	1440
SEALING - TAPES, BACKER RODS, TOOLS & ANCILLARIES							
18	SOUDABAND PRO BG1	10/1-2 x 20m	anthracite	tape	110265	30 x 20m	36000
18	SOUDABAND PRO BG1	15/1-4 x 13m	anthracite	tape	110267	20 x 13m	15600
18	SOUDABAND PRO BG1	20/1-4 x 13m	anthracite	tape	121843	15 x 13m	11700
18	SOUDABAND PRO BG1	12/2-6 x 12m	anthracite	tape	121842	25 x 12m	18000
18	SOUDABAND PRO BG1	15/2-6 x 12m	anthracite	tape	110268	20 x 12m	14400
18	SOUDABAND PRO BG1	20/2-6 x 12m	anthracite	tape	121841	15 x 12m	10800
18	SOUDABAND PRO BG1	15/4-9 x 8m	anthracite	tape	121840	20 x 8m	9600
18	SOUDABAND PRO BG1	20/4-9 x 8m	anthracite	tape	122338	15 x 8m	7200
18	SOUDABAND PRO BG1	30/4-9 x 8m	anthracite	tape	123455	10 x 8m	4800
18	SOUDABAND PRO BG1	15/5-12 x 5.6m	anthracite	tape	122844	20 x 5.6m	6720
18	SOUDABAND PRO BG1	15/6-15 x 4.3m	anthracite	tape	122339	20 x 4.3m	1152
18	SOUDABAND PRO BG1	20/6-15 x 4.3m	anthracite	tape	121839	15 x 4.3m	3870
18	SOUDABAND PRO BG1	20/9-20 x 3.3m	anthracite	tape	122845	15 x 3.3m	2970
18	SOUDABAND PRO BG1	25/11-25 x 5.6m	anthracite	tape	124794	12 x 2.6m	1872
18	SOUDABAND PRO BG1	35/18-34 x 2.6m	anthracite	tape	124793	8 x 3.3m	1584
18	SOUDABAND PRO BG1	40/24-42 x 3.3m	anthracite	tape	124795	7 x 2.6m	1092
18	BACKER RODS - PU	15mm	grey	rod	110283	250 x 1m	999
18	BACKER RODS - PU	20mm	grey	rod	110284	200 x 1m	2000
18	BACKER RODS - PU	25mm	grey	rod	110285	100 x 1m	999
18	BACKER RODS - PU	30mm	grey	rod	110286	100 x 1m	999
18	BACKER RODS - PU	40mm	grey	rod	110287	50 x 1m	999
18	BACKER RODS - PU	50mm	grey	rod	110288	50 x 1m	999
18	WINBAG SET (4 PACK)	pack of 4	black	pack of 4	124490	4	360
18	CARTRIDGE CUTTER	n/a	red	cutter	300373	1	23100
19	CARTRIDGE GUN	310ml	orange	gun	106966	24	1152
19	CARTRIDGE GUN - HEAVY DUTY	310ml	black	gun	106617	12	432
19	CARTRIDGE GUN	400ml	red	gun	112107	24	864
19	CARTRIDGE GUN - COX BRAND	400ml	orange	gun	106848	25	1000
19	CARTRIDGE GUN - HEAVY DUTY	400ml	red	gun	117036	12	336
19	MANUAL FOIL PACK GUN - COX BRAND	400ml	aluminium	gun	106557	1	400
19	MANUAL FOIL PACK GUN	400ml	aluminium	gun	114926	1	240
19	MANUAL FOIL PACK GUN	600ml	aluminium	gun	112802	10	160
19	SILICONE REMOVER	100ml	clear	bottle	102853	12	2772
19	TWISTY NOZZLES	n/a	n/a	nozzle	117773	12	1800
SEALING & BONDING - Fix ALL®							
22	Fix ALL® FLEXI	290ml	white	cartridge	106036	12	1440
22	Fix ALL® FLEXI	290ml	black	cartridge	106039	12	1440
22	Fix ALL® FLEXI	290ml	grey	cartridge	106037	12	1440
22	Fix ALL® FLEXI	290ml	brown	cartridge	106038	12	1440

Product Information

PAGE NO.	PRODUCT NAME	SIZE	COLOUR	PACK TYPE	PRODUCT NUMBER	BOX UNITS	PALLET UNITS
22	Fix ALL® FLEXI	125ml	white	tube	131082	10	1600
22	Fix ALL® FLEXI	80ml	white	tube	110833	10	1600
22	Fix ALL® CRYSTAL	290ml	crystal clear	cartridge	118779	12	1440
22	Fix ALL® CRYSTAL	125ml	crystal clear	tube	131080	10	1600
22	Fix ALL® CRYSTAL	80ml	crystal clear	tube	117774	10	1600
23	Fix ALL® HIGH TACK	290ml	white	cartridge	101444	12	1440
23	Fix ALL® HIGH TACK	290ml	black	cartridge	101459	12	1440
23	Fix ALL® HIGH TACK	290ml	grey	cartridge	101454	12	1440
23	Fix ALL® HIGH TACK	290ml	brown	cartridge	119270	12	1440
23	Fix ALL® HIGH TACK	80ml	white	tube	120460	10	1600
23	Fix ALL® HIGH TACK INVISIBLE	290ml	invisible	cartridge	131209	12	1440
24	Fix ALL® X-TREME POWER	290ml	white	cartridge	127479	12	1440
24	Fix ALL® TURBO	290ml	white	cartridge	122236	12	1440
24	Fix ALL® TURBO	125ml	white	tube	131077	10	1600
SEALING & BONDING - HYBRID POLYMERS							
26	SOU DASEAL® 240FC	290ml	white	cartridge	101364	12	1560
26	SOU DASEAL® 240FC	290ml	grey	cartridge	105027	12	1440
26	SOU DASEAL® 240FC	290ml	black	cartridge	104925	12	1440
26	SOU DASEAL® 240FC	600ml	white	foilpack	101809	12	792
26	SOU DASEAL® 240FC	600ml	concrete grey	foilpack	106912	12	792
26	SOU DASEAL® 240FC	600ml	black	foilpack	108148	12	792
26	SOU DASEAL® 250XF	290ml	white	cartridge	113890	12	1440
26	SOU DASEAL® 250XF	290ml	grey	cartridge	113891	12	1440
26	SOU DASEAL® 250XF	290ml	black	cartridge	114120	12	1440
26	SOU DASEAL® 250XF	600ml	white	foilpack	119122	12	792
26	SOU DASEAL® 270HS	290ml	white	cartridge	110207	12	1560
26	SOU DASEAL® 270HS	290ml	black	cartridge	111029	12	1560
26	SOU DASEAL® 270HS	600ml	white	foilpack	113761	12	792
26	SOU DASEAL® 270HS	600ml	black	foilpack	110645	12	792
26	SOU DASEAL® MS CLEAR	290ml	crystal clear	cartridge	111586	12	1440
27	SOU DASEAL® HIGH TACK	290ml	white	cartridge	101639	12	1560
27	SOU DASEAL® HIGH TACK	290ml	black	cartridge	101810	12	1560
27	SOU DASEAL® SUPERTACK	290ml	white	cartridge	118456	12	1440
27	SOU DASEAL® SUPERTACK	290ml	black	cartridge	119764	12	1440
27	SOU DASEAL® SL	600ml	RAL9010 pure white	foilpack	117121	12	792
27	SOU DASEAL® 2K	250ml	grey	cartridge	119245	6	810
27	SOU DASEAL® 2K STATIC MIXER	n/a	n/a	nozzle	119561	10	9000
SEALING & BONDING - POLYURETHANE POLYMERS							
28	SOU DAFLEX® 20LM*	600ml	white	foilpack	127290	12	792
28	SOU DAFLEX® 20LM*	600ml	dark beige	foilpack	127187	12	792
28	SOU DAFLEX® 20LM*	600ml	medium grey	foilpack	127188	12	792
28	SOU DAFLEX® 40FC*	310ml	white	cartridge	102642	12	1440
28	SOU DAFLEX® 40FC*	310ml	grey	cartridge	102640	12	1440
28	SOU DAFLEX® 40FC*	310ml	black	cartridge	102643	12	1440
28	SOU DAFLEX® 40FC*	310ml	teak	cartridge	102641	12	1440
28	SOU DAFLEX® 40FC*	600ml	white	foilpack	102486	12	792
28	SOU DAFLEX® 40FC*	600ml	black	foilpack	104103	12	792
28	SOU DAFLEX® 40FC*	600ml	grey	foilpack	102485	12	792
28	SOU DAFLEX® 40FC*	600ml	concrete grey	foilpack	107561	12	792
28	SOU DAFLEX® JGS*	600ml	concrete grey	foilpack	121059	12	792
28	AQUASWELL*	310ml	champagne	cartridge	124715	12	1440
28	AQUASWELL*	600ml	champagne	foilpack	124909	12	792

PAGE NO.	PRODUCT NAME	SIZE	COLOUR	PACK TYPE	PRODUCT NUMBER	BOX UNITS	PALLET UNITS
29	SOUDAFLEX® 33SL*	600ml	concrete grey	foilpack	130635	12	804
29	SOUDAFLEX® 36FL*	600ml	concrete grey	foilpack	130725	12	792
SEALING & BONDING - SURFACE PREPARATION & PRIMERS							
30	PRIMER 100	500ml	clear	flask	123012	6	900
30	PRIMER 150	500ml	clear	flask	123011	6	900
30	ALU PREP	250ml	clear	flask	122255	6	864
BONDING - SOUDABOND EASY							
33	SOUDABOND EASY GUN GRADE*	750ml	orange	canister	121734	12	780
33	SOUDABOND EASY HAND HELD	750ml	orange	canister	128486	12	648
33	SOUDABOND EASY GENIUS GUN*	750ml	orange	canister	130426	12	468
BONDING - T-REX®							
35	T-REX® - SOLVENT BASED	310ml	beige	cartridge	125935	12	1488
35	T-REX® - SOLVENT FREE	310ml	white	cartridge	126781	12	1488
BONDING - CONSTRUCTION ADHESIVES							
36	CONTACT ADHESIVE 370 SP SPRAYABLE	22L	transparent	canister	128508	1	36
36	CONTACT ADHESIVE 370 SP SPRAYABLE	22L	pink	canister	125780	1	24
36	ERGOGRIP GUN	n/a	n/a	gun	125077	1	999
36	ERGOGRIP GUN FLEXIBLE HOSE	n/a	n/a	hose	125075	1	999
36	ERGOGRIP GUN SPRAY NOZZLE - 15°	n/a	n/a	nozzle	125083	1	999
36	ERGOGRIP GUN SPRAY NOZZLE - 40°	n/a	n/a	nozzle	125086	1	999
36	ERGOGRIP GUN SPRAY NOZZLE - 60°	n/a	n/a	nozzle	125076	1	999
37	ADHESIVE ROLLER - 75mm	n/a	n/a	roller	125077	1	999
37	ADHESIVE ROLLER - 120mm	n/a	n/a	roller	125083	1	999
37	DISSOLVER SP	500ml	transparent	canister	128510	12	624
37	CLEANING ADAPTOR	n/a	n/a	pack of 3	123457	1	1584
37	CONTACT ADHESIVE 270 SP SPRAYABLE	500ml	transparent	canister	128676	12	624
38	CONTACT ADHESIVE 170 TX	750ml	yellow	tin	125778	6	576
38	CONTACT ADHESIVE 170 TX	5L	yellow	tin	125779	4	144
38	CONTACT ADHESIVE 140 LQ LIQUID	750ml	yellow	tin	125777	6	576
38	CONTACT ADHESIVE 140 LQ LIQUID	5L	yellow	tin	125776	4	144
38	Fix ALL® FLOOR & WALL	4 kg	white	bucket	120137	1	80
39	SUPERGLUE MV	20g	clear	bottle	114747	25	1000
39	SUPERGLUE MV	50g	clear	bottle	124041	25	1000
39	SUPERGLUE HV	20g	clear	bottle	124042	25	1000
39	SUPERGLUE HV	50g	clear	bottle	115107	25	1000
39	SUPERGLUE HV	100g	clear	bottle	130475	10	1200
39	MITRE KIT	50g+200ml	clear	multi-pack	115103	12	1440
39	MITRE KIT	100g+400ml	clear	multi-pack	130623	6	600
39	SUPERGLUE ACTIVATOR	200ml	clear	canister	114746	12	1260
39	SUPERGLUE ACTIVATOR	400ml	clear	canister	128709	12	624
BONDING - TIMBER ADHESIVES							
40	PRO 45P*	750gr	brown	bottle	108765	6	600
40	PRO 45P*	5 kg	brown	jerrycan	108902	4	144
40	PRO 40P*	750gr	brown	bottle	108766	6	630
40	PRO 40P*	5 kg	brown	jerrycan	108901	4	144
40	PUROCOL EXPRESS*	310ml	transparent	cartridge	112524	12	1560
40	PUROCOL*	310ml	transparent	cartridge	107300	15	1500
41	PU CONSTRUCT	310ml	beige	cartridge	112523	15	1500
41	PRO 30D	750gr	white	bottle	108769	6	630
41	PRO 30D	5 kg	white	bucket	108900	5	72
41	PRO 30D	20 L	white	jerrycan	103069	1	24
41	PRO 20D	750gr	white	bottle	108767	6	600

Product Information

PAGE NO.	PRODUCT NAME	SIZE	COLOUR	PACK TYPE	PRODUCT NUMBER	BOX UNITS	PALLET UNITS
41	PRO 20D	5 kg	white	bucket	108899	5	72
41	PRO 20D	20 L	white	jerrycan	103057	1	24
41	PRO 10D	750gr	white	bottle	108768	6	630
41	PRO 10D	5 kg	white	bucket	108898	5	72
41	PRO 10D	20 L	white	jerrycan	103051	1	24
FILLING - POLYURETHANE FOAM - WINDOWS & DOORS							
44	SOUDAFOAM® WINDOW & DOOR XTRA GUN GRADE*	750ml	champagne	canister	130578	12	624
44	SOUDAFOAM® WINDOW & DOOR GUN GRADE*	750ml	champagne	canister	130582	12	624
44	SOUDAFOAM® WINDOW & DOOR GUN GRADE* COMBI-BOX APPLICATOR PACK	PACK	champagne	multi-pack	130689	1	52
44	SOUDAFOAM® WINDOW & DOOR CLICK & FIX**	750ml	champagne	canister	130579	12	624
44	SOUDAFOAM® WINDOW & DOOR HAND HELD	750ml	champagne	canister	130581	12	624
44	SOUDAFOAM® WINDOW & DOOR GENIUS GUN® MAX	600ml	champagne	canister	130580	12	624
FILLING - POLYURETHANE FOAM - GAP FILLING							
45	SOUDAFOAM® GAP FILLER XTRA GUN GRADE*	750ml	champagne	canister	130587	12	624
45	SOUDAFOAM® GAP FILLER XTRA HAND HELD MEGA-ADAPTOR	750ml	champagne	canister	130588	12	624
45	SOUDAFOAM® GAP FILLER XTRA GENIUS GUN®	750ml	champagne	canister	130586	12	624
45	SOUDAFOAM® GAP FILLER GUN GRADE*	750ml	champagne	canister	130585	12	624
45	SOUDAFOAM® GAP FILLER GUN GRADE* COMBI-BOX APPLICATOR PACK	PACK	champagne	multi-pack	130690	1	52
45	SOUDAFOAM® GAP FILLER CLICK & FIX**	750ml	champagne	canister	130589	12	624
45	SOUDAFOAM® GAP FILLER HAND HELD	750ml	champagne	canister	130584	12	624
45	SOUDAFOAM® GAP FILLER HAND HELD	500ml	champagne	canister	130583	12	624
45	SOUDAFOAM® GAP FILLER GENIUS GUN®	600ml	champagne	canister	130590	12	624
FILLING - POLYURETHANE FOAM - SPECIALIST							
46	SOUDAFOAM® ONE SHOT HAND HELD	150ml	champagne	canister	130575	12	1296
46	SOUDAFOAM® SMX® HAND HELD	500ml	white	canister	130592	6	624
46	SOUDAFOAM® EXPRESS	400ml	green	canister	130593	12	780
FILLING - POLYURETHANE FOAM - CLEANERS, TOOLS & ANCILLARIES							
46	GUN & FOAM CLEANER - GUN GRADE	500ml	clear	canister	130576	12	624
46	GUN & FOAM CLEANER - CLICK & FIX	500ml	clear	canister	102080	12	624
47	COMPACT PU FOAM GUN - STANDARD	n/a	n/a	gun	109953	1	240
47	COMPACT PU FOAM GUN - CLICK & FIX	n/a	n/a	gun	110226	1	440
47	DESIGN PU FOAM GUN - STANDARD	n/a	n/a	gun	103266	1	240
47	DESIGN PU FOAM GUN - LONG	n/a	n/a	gun	122129	1	320
47	DESIGN PU FOAM GUN - EXTRA LONG	n/a	n/a	gun	119559	1	200
47	DESIGN PU FOAM GUN - CLICK & FIX	n/a	n/a	gun	106016	1	400
47	CURED PU FOAM REMOVER	100ml	clear	bottle	115778	6	1296
47	PU FOAM NOZZLES	n/a	n/a	nozzle	102998	5	864
DECORATING SEALANTS & FILLERS - FLEXIBLE FILLERS48							
48	ACRYRUB®	310ml	white	cartridge	102600	15	1500
48	ACRYRUB®	310ml	grey	cartridge	102598	15	1500
48	ACRYRUB®	310ml	teak	cartridge	102599	15	1500
48	ACRYRUB®	310ml	black	cartridge	102601	15	1500
48	ACRYRUB®	600ml	white	foilpack	102603	12	792
48	ACRYRUB®	600ml	grey	foilpack	102602	12	792
48	ACRYRUB® UK	300ml	extra white	cartridge	111098	24	1440

PAGE NO.	PRODUCT NAME	SIZE	COLOUR	PACK TYPE	PRODUCT NUMBER	BOX UNITS	PALLET UNITS
48	ACRYRUB® UK	380ml	extra white	cartridge	106176	12	1152
48	ACRYRUB® UK	400ml	extra white	foilpack	127349	25	1500
48	DEC CAULK	300ml	white	cartridge	115320	24	1440
48	TRANSPACRYL	310ml	clear	cartridge	102901	15	1500
DECORATING SEALANTS & FILLERS - SPECIALIST FILLERS							
49	REPA-CRYL D	310ml	white	cartridge	106184	15	1500
49	SOUDAFILL LIGHT	900ml	white	tub	119492	6	480
49	PVCu GAP FILLER	300ml	white	cartridge	111324	24	1536
AIRTIGHT CONSTRUCTION - WINDOW CONNECTIONS - SOUDAL WINDOW SYSTEM®							
50	SOUDABAND ACTIV PLUS - BG1 + BGR	54/5-10 x 5.6m	red/grey	tape	123045	5 x 5.6m	60
50	SOUDABAND ACTIV PLUS - BG1 + BGR	64/5-10 x 5.6m	red/grey	tape	123044	4 x 5.6m	60
50	SOUDABAND ACTIV PLUS - BG1 + BGR	74/5-10 x 5.6m	red/grey	tape	123036	4 x 5.6m	60
50	SOUDABAND ACTIV PLUS - BG1 + BGR	84/5-10 x 5.6m	red/grey	tape	123043	3 x 5.6m	60
50	SOUDABAND ACTIV PLUS - BG1 + BGR	54/7-15 x 4.3m	red/grey	tape	123042	5 x 4.3m	60
50	SOUDABAND ACTIV PLUS - BG1 + BGR	64/7-15 x 4.3m	red/grey	tape	123041	4 x 4.3m	60
50	SOUDABAND ACTIV PLUS - BG1 + BGR	74/7-15 x 4.3m	red/grey	tape	123040	4 x 4.3m	60
50	SOUDABAND ACTIV PLUS - BG1 + BGR	84/7-15 X 4.3m	red/grey	tape	123035	3 x 4.3m	60
50	SOUDABAND ACTIV PLUS - BG1 + BGR	54/10-20 x 3.3m	red/grey	tape	123039	5 x 3.3m	60
50	SOUDABAND ACTIV PLUS - BG1 + BGR	64/10-20 x 3.3m	red/grey	tape	123034	4 x 3.3m	60
50	SOUDABAND ACTIV PLUS - BG1 + BGR	74/10-20 x 3.3m	red/grey	tape	123038	4 x 3.3m	60
50	SOUDABAND ACTIV PLUS - BG1 + BGR	84/10-20 x 3.3m	red/grey	tape	123037	3 x 3.3m	60
51	SWS INSIDE TAPE	70mm x 25m	pink	roll	123884	1	480
51	SWS INSIDE TAPE	100mm x 25m	pink	roll	123883	1	360
51	SWS INSIDE TAPE	150mm x 25m	pink	roll	123885	1	240
51	SWS INSIDE TAPE	200mm x 25m	pink	roll	123886	1	168
51	SWS INSIDE TAPE	400mm x 20m	pink	roll	124453	1	96
51	SWS OUTSIDE TAPE	70mm x 25m	white	roll	123887	1	480
51	SWS OUTSIDE TAPE	100mm x 25m	white	roll	123888	1	360
51	SWS OUTSIDE TAPE	150mm x 25m	white	roll	123889	1	240
51	SOUDAFOIL 330D	310ml	white	cartridge	122660	15	1500
51	SOUDAFOIL 330D	600ml	white	foilpack	120158	12	792
51	SOUDAFOIL 360H	600ml	grey	foilpack	120157	12	792
AIRTIGHT CONSTRUCTION - FAÇADE CLADDING							
52	EPDM MEMBRANE FIX	150mm x 20m	black	roll	130283	4	72
52	EPDM MEMBRANE FIX	200mm x 20m	black	roll	130284	4	72
52	EPDM MEMBRANE FIX	250mm x 20m	black	roll	130285	2	36
52	EPDM MEMBRANE FIX	300mm x 20m	black	roll	130286	2	36
52	EPDM MEMBRANE	200mm x 20m	black	roll	130287	4	72
52	EPDM MEMBRANE	250mm x 20m	black	roll	130288	4	72
52	EPDM MEMBRANE	300mm x 20m	black	roll	130289	2	36
52	EPDM MEMBRANE	400mm x 20m	black	roll	130290	2	36
52	SOUDASEAL® EPDM	600ml	black	foilpack	130549	12	792
AIRTIGHT CONSTRUCTION - ROOFING							
53	VAPOURSEAL	300ml	blue	cartridge	122391	15	1500
53	VAPOURSEAL	600ml	blue	foilpack	123020	12	792
53	SOUDATAPE CONNECT	60mm x 40m	yellow	tape	125013	5	600
53	SOUDATAPE FLEX	60mm x 25m	white	tape	125014	10	800
53	SOUDATAPE FLEX	150mm x 25m	white	tape	128401	10	320
53	SOUDATAPE FAÇADE	60mm x 25m	black	tape	125012	10	800
53	SOUDATAPE FAÇADE	60mm x 25m	black	tape	130548	10	800
AIRTIGHT CONSTRUCTION - WALLS & FLOORS							
54	SOUDATIGHT LQ LIQUID	5kg	black	bucket	127954	1	100

Product Information

PAGE NO.	PRODUCT NAME	SIZE	COLOUR	PACK TYPE	PRODUCT NUMBER	BOX UNITS	PALLET UNITS
54	SOUDATIGHT LQ LIQUID	5kg	white	bucket	131608	1	100
54	SOUDATIGHT GEOTEXTILE	150mm x 20m	grey/white	roll	131003	1	60
54	SOUDATIGHT SP SPRAYABLE	10kg	black	bucket	128272	1	33
54	SOUDATIGHT SP SPRAYABLE	10kg	white	bucket	131609	1	33
54	SOUDATIGHT SP GUN	1kg	black	tin	130715	12	600
54	SOUDATIGHT SP GUN	1kg	white	tin	131610	12	600
55	SOUDATIGHT SP APPLICATOR GUN	n/a	n/a	gun	130872	1	200
55	SOUDATIGHT SP APPLICATOR NOZZLE	n/a	n/a	nozzle	131296	12	1800
55	SOUDATIGHT HYBRID	n/a	grey	foilpack	130545	12	792
55	BUTYBAND FLEECE	150mm x 20m	black	roll	125548	2	84
56	COX JETFLOW APPLICATOR GUN	n/a	n/a	gun	131824	1	80
56	COX JETFLOW APPLICATOR NOZZLE	n/a	n/a	nozzle	131896	1	1000
AIRTIGHT CONSTRUCTION - WINDOW FABRICATION							
57	SOUDATHERM SFI 600P	10.4kg	grey	canister	127997	1	36
57	SOUDATHERM SFI 600P NOZZLE	n/a	n/a	nozzle	128221	1	8000
57	SOUDATHERM SFI 600P MULTI GUN	n/a	n/a	gun	128119	1	240
57	SOUDATHERM SFI 600P GUN	n/a	n/a	gun	127337	1	240
57	SOUDATHERM TROLLEY	n/a	n/a	trolley	127270	1	4
WINDOW FABRICATION RANGE							
58	SOUDABOND® 641	310ml	white	cartridge	130870	12	1440
58	SOUDABOND® 642 DUO	620ml (2x310ml)	beige	cartridge	128065	6	810
58	SOUDABOND® 642 DUO APPLICATOR GUN	2x310ml	n/a	gun	128708	1	1000
59	ALUSEAL	310ml	transparent	cartridge	128138	12	1440
59	SURFACE CLEANER	500ml	clear	flask	107789	6	900
59	SURFACE ACTIVATOR	500ml	clear	flask	101638	6	900
59	ACTIVATOR SPRAY	500ml	transparent	aerosol	134507	12	624
GLASS & GLAZING RANGE							
60	SOUDASEAL® MIRROR	290ml	light grey	cartridge	117339	12	1560
60	SMX® 506	290ml	black	cartridge	119538	12	1440
60	SMX® 506	290ml	white	cartridge	120831	12	1440
60	SILIRUB® AQ	300ml	clear	cartridge	102543	15	1500
60	SILIRUB® AQ	300ml	black	cartridge	105751	15	1500
60	UNIVERSAL PUTTY	500gr	natural	tub	106749	12	900
60	UNIVERSAL PUTTY	1kg	natural	tub	106751	12	600
HIGH TEMPERATURE RANGE							
61	SILIRUB® HT-N	300ml	black	cartridge	108266	15	1500
61	SILIRUB® HT-A	300ml	black	cartridge	108265	15	1500
61	FIRECEMENT HT	300ml	black	cartridge	108264	15	1500
FIRE RANGE							
62	FIRE SILICONE B1 FR	300ml	white	cartridge	108998	15	1500
62	FIRE SILICONE B1 FR	300ml	grey	cartridge	102530	15	1500
62	FIRE SILICONE B1 FR	600ml	white	foilpack	122156	12	792
62	FIRE SILICONE B1 FR	600ml	grey	foilpack	109952	12	792
62	FIRECRYL FR	300ml	white	cartridge	106329	15	1500
62	FIRECRYL FR	300ml	grey	cartridge	107433	15	1500
62	FIRECRYL FR	600ml	white	foilpack	105229	12	792
62	FIRECRYL FR	600ml	grey	foilpack	110947	12	792
63	SOUDASEAL® FR	600ml	grey	foilpack	113628	12	792
63	SOUDAFOAM® FR HAND HELD 1K	750ml	pink	canister	108289	12	624
63	SOUDAFOAM® FR GUN GRADE*	750ml	pink	canister	123233	12	624
63	SOUDAFOAM® FR CLICK & FIX**	750ml	pink	canister	110203	12	624
ROOFING RANGE - ADHESIVES							

PAGE NO.	PRODUCT NAME	SIZE	COLOUR	PACK TYPE	PRODUCT NUMBER	BOX UNITS	PALLET UNITS
64	SODATHERM ROOF 330	10.4kg	orange	Canister	124159	1	36
65	SODATHERM ROOF 330 APPLICATOR GUN	600mm	n/a	Gun	121825	1	320
65	SODATHERM ROOF 330 APPLICATOR GUN	1000mm	n/a	Gun	121824	1	200
65	SODATHERM ROOF 330 GUN BACKPACK	n/a	n/a	Backpack	122956	1	128
66	SODATHERM ROOF 250	800ml	orange	Canister	120886	12	624
66	SODATHERM ROOF 250 COMBI-BOX	Pack	n/a	Multi-pack	128609	1	52
67	SODATHERM ROOF 170	5.5kg	yellowish	Jerrycan	125729	4	144
ROOFING & DUCTING RANGE - SEALANTS, TAPES & COATINGS							
68	BUTYRUB - NON-SETTING MASTIC	300ml	white	cartridge	102572	15	1500
68	BUTYRUB - NON-SETTING MASTIC	300ml	black	cartridge	101478	15	1500
68	BUTYRUB - NON-SETTING MASTIC	300ml	grey	cartridge	102570	15	1500
68	BUTYRUB - NON-SETTING MASTIC	600ml	grey	foilpack	102573	12	792
68	SODAFALT - ROOF & GUTTER SEALANT	300ml	black	cartridge	102668	15	1500
68	AQUAFIX - ALL WEATHER SEALANT	300ml	clear	cartridge	104789	15	1500
68	SODALEAD Pb - LEAD SEALANT	300ml	grey	cartridge	113146	15	1800
69	WATERSTOP	4kg	grey	tin	112595	4	96
69	BUTYBAND BUTYL FLASHING TAPE	75mm x 10m	lead	roll	111088	8	640
69	BUTYBAND BUTYL FLASHING TAPE	100mm x 10m	lead	roll	111089	8	480
69	BUTYBAND BUTYL FLASHING TAPE	150mm x 10m	lead	roll	111090	4	320
69	BUTYBAND BUTYL FLASHING TAPE	225mm x 10m	lead	roll	111091	4	160
69	BUTYBAND BUTYL FLASHING TAPE	300mm x 10m	lead	roll	111092	4	160
69	BUTYBAND BUTYL FLASHING TAPE	75mm x 10m	aluminium	roll	111083	8	640
69	BUTYBAND BUTYL FLASHING TAPE	100mm x 10m	aluminium	roll	111084	8	480
69	BUTYBAND BUTYL FLASHING TAPE	150mm x 10m	aluminium	roll	111085	4	320
69	BUTYBAND BUTYL FLASHING TAPE	225mm x 10m	aluminium	roll	111086	4	160
69	BUTYBAND BUTYL FLASHING TAPE	300mm x 10m	aluminium	roll	111087	4	160
69	SODADUCT - DUCTING SEALANT	300ml	grey	cartridge	114411	24	1440
69	SODADUCT - DUCTING SEALANT	600ml	grey	foilpack	118836	12	792
FLOORING RANGE							
70	SMX®-30 PLUS PARQUET ADHESIVE	16 kg	light brown	bucket	124166	1	33
70	SMX®-30 PLUS PARQUET ADHESIVE	3x6kg	light brown	bucket	124036	1	30
70	MS-30 PLUS PARQUET ADHESIVE	16 kg	light brown	bucket	124163	1	33
70	MS-30 PLUS PARQUET ADHESIVE	6 kg	light brown	bucket	124204	1	100
70	MS-30 PLUS PARQUET ADHESIVE	3x6kg	light brown	bucket	124167	1	30
70	MS-20 PLUS PARQUET ADHESIVE	16kg	light brown	bucket	124165	1	33
70	MS-20 PLUS PARQUET ADHESIVE	6 kg	light brown	bucket	124203	1	100
70	MS-20 PLUS PARQUET ADHESIVE	3x6kg	light brown	bucket	124164	1	30
71	SMX®-15P PARQUET ADHESIVE	600ml	light brown	foilpack	122513	12	792
71	MS-25P PARQUET ADHESIVE	600ml	black	foilpack	118015	12	792
71	LVT PREMIUM ADHESIVE	13kg	light beige	bucket	134895	1	33
72	PU-20P PARQUET ADHESIVE	6kg	light brown	bucket	113065	6	72
72	SV-15P PARQUET ADHESIVE	13kg	light brown	tin	112923	1	52
72	DS-10P PARQUET ADHESIVE	15kg	light brown	bucket	112924	1	33
72	TROWEL - SMALL NR3	n/a	n/a	trowel	112946	12	1800
72	TROWEL - LARGE NR11	n/a	n/a	trowel	112945	12	1800
72	TROWEL - LVT ADHESIVE - A2	n/a	n/a	trowel	134925	12	1200
73	WBPR-11P SURFACE PRIMER	5L	white	jerrycan	113357	1	64
73	WBPR-21P DEEP PRIMER	5L	white	jerrycan	113358	1	64
73	EPR-31P EPOXY SEAL	7kg	brown	tin	114605	1	48
73	PARQUET & TIMBER SEALANT	290ml	ash/maple	cartridge	125587	6	1152
73	PARQUET & TIMBER SEALANT	290ml	cherry	cartridge	125588	6	1152
73	PARQUET & TIMBER SEALANT	290ml	medium oak	cartridge	125589	6	1152

Product Information

PAGE NO.	PRODUCT NAME	SIZE	COLOUR	PACK TYPE	PRODUCT NUMBER	BOX UNITS	PALLET UNITS
73	PARQUET & TIMBER SEALANT	290ml	light oak	cartridge	125590	6	1152
73	PARQUET & TIMBER SEALANT	290ml	beech	cartridge	125591	6	1152
73	PARQUET & TIMBER SEALANT	290ml	mocca	cartridge	125592	6	1152
73	PARQUET & TIMBER SEALANT	290ml	merbau	cartridge	125595	6	1152
73	PARQUET & TIMBER SEALANT	290ml	pearl white	cartridge	132208	6	1152
73	PARQUET & TIMBER SEALANT	290ml	light grey	cartridge	127175	6	1470
73	PARQUET & TIMBER SEALANT	290ml	dark grey	cartridge	127174	6	1470
CLEANING RANGE							
75	DUST SHEETS - HEAVY DUTY	9ft x 12ft	natural cotton	sheet	124762	1	500
75	DUST SHEETS - ECONOMY	9ft x 12ft	natural cotton	sheet	131207	1	250
75	STAIR-RUNNER (DUST SHEET)	24ft x 3ft	natural cotton	sheet	124258	1	500
75	TISSUE ROLLS	190mm x 150m	white	roll	123870	6	300
75	TISSUE ROLLS	260mm x 400m	white	roll	124193	2	84
75	TARPAULIN - HEAVY DUTY	9ft x 12ft	blue/white	sheet	127061	1	500
75	TARPAULIN - HEAVY DUTY	18ft x 12ft	blue/white	sheet	127791	1	252
75	TARPAULIN - ECONOMY	18ft x 12ft	blue	sheet	131208	1	250
76	PVCu FRAME CLEANER	1L	clear	bottle	113621	12	480
76	FRAME & GLASS CLEANER - FOIL SAFE	1L	white	bottle	127216	12	480
76	PVCu CREAM CLEANER	1L	clear	bottle	113619	12	480
76	GLASS & MIRROR CLEANER	1L	blue	bottle	113620	12	480
76	GLASS & MIRROR CLEANER	5L	blue	jerrycan	131549	4	160
76	GLASS & MIRROR CLEANER	25L	blue	jerrycan	115319	1	24
76	SWIPEX WIPES	100	n/a	tub	113551	6	396
76	SWIPEX HAND CLEANER	1L	red	bottle	127329	12	480
77	CLEANER & DEGREASER	400ml	n/a	canister	119708	6	1044
77	SEALANT REMOVER	400ml	n/a	canister	119709	6	1044
77	ADHESIVE REMOVER	400ml	n/a	canister	121929	12	1044
77	MULTI CLEANER	400ml	n/a	canister	119711	6	1044
77	BRAKE CLEANER	400ml	n/a	canister	119712	6	1044
LUBRICATING AEROSOLS							
78	VASELINE SPRAY	400ml	n/a	canister	119703	6	1044
78	SILICONE SPRAY	400ml	n/a	canister	119704	6	1044
78	PTFE SPRAY	400ml	n/a	canister	119705	6	1044
78	WHITE GREASE	400ml	n/a	canister	119706	6	1044
78	MULTI-SPRAY	400ml	n/a	canister	119707	6	1044
ENGINEERING AEROSOLS							
79	ZINC SPRAY (MATT)	400ml	n/a	canister	119713	6	1044
79	ZINC SPRAY (SHINY)	400ml	n/a	canister	119714	6	1044
79	CONTACT SPRAY	400ml	n/a	canister	119715	6	1044
79	DEGRIP ALL	400ml	n/a	canister	119716	6	1044
79	CUTTING OIL	400ml	n/a	canister	119717	6	1044
GENIUS SPRAY AEROSOLS							
81	PROTECT ALL - GENIUS SPRAY	300ml	n/a	genius spray	134619	6	1080
81	LUBRICATE ALL - GENIUS SPRAY	300ml	n/a	genius spray	134620	6	1080
81	ALL IN ONE - GENIUS SPRAY	300ml	n/a	genius spray	134621	6	1080
81	CLEAN ALL - GENIUS SPRAY	300ml	n/a	genius spray	134622	6	1080
81	DEGRIP ALL - GENIUS SPRAY	300ml	n/a	genius spray	134623	6	1080
EXPRESS - PREMIUM DIY SEALANTS							
82	EXPRESS COLOURSEAL SILICONE	300ml	vanilla	cartridge	134214	12	1488
82	EXPRESS COLOURSEAL SILICONE	300ml	chocolate	cartridge	134215	12	1488
82	EXPRESS COLOURSEAL SILICONE	300ml	silver grey	cartridge	134216	12	1488
82	EXPRESS COLOURSEAL SILICONE	300ml	black	cartridge	134217	12	1488

PAGE NO.	PRODUCT NAME	SIZE	COLOUR	PACK TYPE	PRODUCT NUMBER	BOX UNITS	PALLET UNITS
82	EXPRESS COLOURSEAL SILICONE	300ml	cement grey	cartridge	134218	12	1488
82	EXPRESS COLOURSEAL SILICONE	300ml	brown	cartridge	134219	12	1488
82	EXPRESS COLOURSEAL SILICONE	300ml	beige	cartridge	134220	12	1488
82	EXPRESS COLOURSEAL SILICONE	300ml	anthracite	cartridge	134221	12	1488
82	EXPRESS COLOURSEAL SILICONE	300ml	jasmine	cartridge	134222	12	1488
82	EXPRESS COLOURSEAL SILICONE	300ml	white	cartridge	134223	12	1488
82	EXPRESS GENERAL PURPOSE SILICONE	300ml	white	cartridge	127235	12	1488
82	EXPRESS GENERAL PURPOSE SILICONE	300ml	clear	cartridge	127236	12	1488
82	EXPRESS GENERAL PURPOSE SILICONE	300ml	brown	cartridge	127237	12	1488
82	EXPRESS WINDOW & DOOR SILICONE	300ml	white	cartridge	127229	12	1488
82	EXPRESS WINDOW & DOOR SILICONE	300ml	brown	cartridge	127234	12	1488
82	EXPRESS DECORATORS SEALANT	300ml	white	cartridge	127238	12	1488
83	EXPRESS KITCHEN SILICONE	300ml	white	cartridge	127231	12	1488
83	EXPRESS KITCHEN SILICONE	300ml	clear	cartridge	127232	12	1488
83	EXPRESS KITCHEN SILICONE	300ml	Black	cartridge	127233	12	1488
83	EXPRESS BATHROOM & SHOWER SILICONE	300ml	white	cartridge	127239	12	1488
83	EXPRESS BATHROOM & SHOWER SILICONE	300ml	ivory	cartridge	127240	12	1488
83	EXPRESS BATHROOM & SHOWER SILICONE	300ml	clear	cartridge	127241	12	1488
83	EXPRESS ROOF & GUTTER	300ml	black	cartridge	127466	12	1488
83	EXPRESS NATURAL STONE SILICONE	300ml	clear	cartridge	131297	12	1488
83	EXPRESS NATURAL STONE SILICONE	300ml	travertine	cartridge	131298	12	1488
83	EXPRESS NATURAL STONE SILICONE	300ml	marble grey	cartridge	131299	12	1488
EXPRESS - PREMIUM DIY FOAM							
84	EXPRESS GENIUS GUN GAP FILLING FOAM	750ml	champagne	canister	123895	12	864
84	EXPRESS GENIUS GUN GAP FILLING FOAM	500ml	champagne	canister	123236	12	684
84	EXPRESS GENIUS GUN INSULATION FOAM	750ml	champagne	canister	123234	12	684
85	EXPRESS GENIUS GUN PLASTERBOARD ADHESIVE	750ml	champagne	canister	130599	12	684
85	EXPRESS GENIUS BUILDING ADHESIVE	750ml	champagne	canister	128404	12	684
PREMIUM DIY SPECIAL APPLICATION ADHESIVES							
86	SODAL GREEN FIX ADHESIVE	290ml	grass green	cartridge	132197	6	1470
86	SODAL POOL FIX ADHESIVE	290ml	aqua blue	cartridge	132196	6	1470
87	SODAL METAL FIX ADHESIVE	290ml	metal grey	cartridge	132436	6	1470
87	SODAL ZINC FIX ADHESIVE	290ml	zinc grey	cartridge	134631	6	1470
88	SODAL MIRROR FIX ADHESIVE	290ml	white	cartridge	132437	6	1170
REPAIR EXPRESS							
89	REPAIR EXPRESS PLASTER	290ml	white	cartridge	122525	12	1440
89	REPAIR EXPRESS PLASTER	250ml	white	tub	122526	12	720
89	REPAIR EXPRESS CEMENT	290ml	grey	cartridge	125786	12	1440
89	REPAIR EXPRESS CEMENT	290ml	beige	cartridge	128000	6	1440
TRADE RANGE - CONSTRUCTION							
90	BUILDING SILICONE	290ml	white	cartridge	128440	12	1440
90	BUILDING SILICONE	290ml	clear	cartridge	128442	12	1440
90	BUILDING SILICONE	290ml	teak	cartridge	128441	12	1440
90	BUILDING SILICONE	290ml	black	cartridge	128443	12	1440
90	MULTI-PURPOSE SILICONE	270ml	brilliant white	cartridge	121643	12	1860
90	MULTI-PURPOSE SILICONE	270ml	clear	cartridge	121644	12	1860
90	MULTI-PURPOSE SILICONE	270ml	brown	cartridge	116713	12	1488
90	MULTI-PURPOSE SILICONE	270ml	black	cartridge	116824	12	1488
90	MULTI-PURPOSE SILICONE	270ml	grey	cartridge	131605	12	1488
90	MULTI-PURPOSE SILICONE 6-Pack	6x 270ml	brilliant white	multi-pack	121645	1	310
90	MULTI-PURPOSE SILICONE 6-Pack	6x 270ml	clear	multi-pack	121646	1	310

Product Information

PAGE NO.	PRODUCT NAME	SIZE	COLOUR	PACK TYPE	PRODUCT NUMBER	BOX UNITS	PALLET UNITS
90	DECORATORS CAULK	290ml	white	cartridge	121638	12	1860
90	DECORATORS CAULK	290ml	magnolia	cartridge	128444	12	1860
90	DECORATORS CAULK	290ml	brown	cartridge	128445	12	1860
90	DECORATORS CAULK 6-Pack	6x290ml	white	multi-pack	121642	1	310
91	GAP FILLER EXPANDING FOAM HAND HELD	750ml	champagne	canister	116744	12	648
91	GAP FILLER EXPANDING FOAM HAND HELD	500ml	champagne	canister	131553	12	648
91	GAP FILLER EXPANDING FOAM HAND HELD	300ml	champagne	canister	131552	12	648
91	GAP FILLER EXPANDING FOAM HAND HELD	150ml	champagne	canister	128448	12	1296
91	GAP FILLER EXPANDING FOAM GUN GRADE	750ml	champagne	canister	116745	12	624
91	GAP FILLER EXPANDING FOAM GENIUS GUN	600ml	champagne	canister	135234	12	624
91	FOAM & GUN CLEANER	500ml	clear	canister	116924	12	624
91	LIGHT WEIGHT GAP FILLER	290ml	white	cartridge	128447	12	1488
91	LIGHT WEIGHT GAP FILLER	900ml	white	tub	128446	6	576
TRADE RANGE - SANITARY							
92	BATHROOM & KITCHEN SILICONE	290ml	brilliant white	cartridge	116714	12	1488
92	BATHROOM & KITCHEN SILICONE	290ml	clear	cartridge	116715	12	1488
92	BATHROOM & KITCHEN SILICONE	290ml	black	cartridge	135518	12	1488
92	SANITARY SILICONE	290ml	white	cartridge	121647	12	1860
92	SANITARY SILICONE	290ml	clear	cartridge	121648	12	1860
92	SEALING STRIP	22mm x 3.35m	white	tape	134029	6	864
92	SEALING STRIP	38mm x 3.5m	white	tape	134028	6	864
92	PIPE & PLUMBING EXPANDING FOAM GENIUS GUN	300ml	champagne	canister	135217	12	780
92	PIPE & PLUMBING EXPANDING FOAM GENIUS GUN	600ml	champagne	canister	135220	12	624
92	PIPE & PLUMBING EXPANDING FOAM GUN GRADE	500ml	champagne	canister	135222	12	624
92	PIPE & PLUMBING EXPANDING FOAM GUN GRADE	750ml	champagne	canister	135221	12	624
TRADE RANGE - GLAZING							
93	EXTERIOR FRAME SILICONE	270ml	white	cartridge	121649	12	1860
93	EXTERIOR FRAME SILICONE	270ml	brown	cartridge	121654	12	1860
93	EXTERIOR FRAME SILICONE	270ml	clear	cartridge	128453	12	1488
93	EXTERIOR FRAME SILICONE	270ml	black	cartridge	128454	12	1488
93	EXTERIOR FRAME SILICONE	270ml	grey	cartridge	128455	12	1488
93	INTERIOR FRAME SEALANT	290ml	white	cartridge	129157	12	1488
93	GLAZING SILICONE SEALANT	290ml	clear	cartridge	121655	12	1860
93	WINDOW & DOOR EXPANDING FOAM GENIUS GUN	600ml	champagne	canister	135223	12	624
TRADE RANGE - ROOFING							
94	LEAD SHEET SEALANT	290ml	grey	cartridge	116726	12	1440
94	ALL WEATHER SEALANT	290ml	clear	cartridge	116727	12	1488
94	ROOF & GUTTER SEALANT	290ml	black	cartridge	121656	12	1860
94	ROOF & INSULATION EXPANDING FOAM GENIUS GUN	600ml	champagne	cansiter	135219	12	624
TRADE RANGE - FIRE & ACOUSTIC							
95	B1 FIRE & ACOUSTIC EXPANDING FOAM HAND HELD	750ml	blue	cansiter	132728	12	648
95	B1 FIRE & ACOUSTIC EXPANDING FOAM GUN GRADE	750ml	blue	cansiter	132730	12	648
95	B1 FIRE & ACOUSTIC EXPANDING FOAM GENIUS GUN	600ml	blue	cansiter	135215	12	624
95	B2 FIRE & ACOUSTIC EXPANDING FOAM HAND HELD	750ml	champagne	cansiter	128449	12	624

PAGE NO.	PRODUCT NAME	SIZE	COLOUR	PACK TYPE	PRODUCT NUMBER	BOX UNITS	PALLET UNITS
95	B2 FIRE & ACOUSTIC EXPANDING FOAM GUN GRADE	750ml	champagne	cansiter	128450	12	624
95	B2 FIRE & ACOUSTIC EXPANDING FOAM GENIUS GUN	600ml	champagne	cansiter	135233	12	624
TRADE RANGE - ADHESIVES							
96	5 MINUTE D4 WOOD ADHESIVE LIQUID	750gr	brown	bottle	134052	6	720
96	30 MINUTE D4 WOOD ADHESIVE LIQUID	750gr	brown	bottle	134053	6	720
96	5 MINUTE D4 WOOD ADHESIVE GEL	290ml	clear	cartridge	134051	12	1560
96	30 MINUTE D4 WOOD ADHESIVE GEL	290ml	clear	cartridge	134050	12	1560
97	WATER RESISTANT D3 WOOD ADHESIVE	1ltr	white	bottle	117245	6	480
97	WATER RESISTANT D3 WOOD ADHESIVE	5ltr	white	jerrycan	116946	4	96
97	MITRE-KITS	50g+200ml	clear	multi-pack	130474	12	630
97	SUPERGLUE HV	50g	clear	bottle	130471	25	1000
97	SUPERGLUE ACTIVATOR	200ml	clear	canister	130632	12	1260
97	GRIP ALL ADHESIVE	290ml	beige	cartridge	116740	12	1488
97	GRIP ALL SOLVENT FREE ADHESIVE	290ml	white	cartridge	116741	12	1488
AUTOMOTIVE RANGE - BODY REPAIR							
98	METAL PLASTIC STANDARD	250gr	grey	tin	103419	12	864
98	METAL PLASTIC STANDARD	1 kg	grey	tin	103420	12	648
98	METAL PLASTIC STANDARD	2 kg	grey	tin	103421	6	420
98	METAL PLASTIC STANDARD	3kg	grey	dispenser tin	105348	4	240
98	METAL PLASTIC SOFT	1 kg	beige	tin	104314	12	648
98	METAL PLASTIC SOFT	2 kg	beige	tin	105975	6	420
98	METAL PLASTIC EXTRA FINE	1 kg	white	tin	103424	12	648
98	METAL PLASTIC EXTRA FINE	2 kg	white	tin	103425	6	420
98	METAL PLASTIC UNIVERSAL	2 kg	green	tin	110347	6	420
98	METAL PLASTIC ALU	2 kg	aluminium	tin	103426	6	420
98	METAL PLASTIC BLACK	2 kg	black	tin	110234	6	420
99	HARDENER	10gr	red	tube	121173	24	20000
99	HARDENER	15gr	red	tube	121175	24	20000
99	HARDENER	30gr	red	tube	121176	24	10000
99	HARDENER	50gr	red	tube	121174	24	8000
99	HARDENER	50gr	white	tube	306123	24	12000
99	HARDENER - DISPENSER SYSTEM	55gr	red	tube	122738	6	900
99	DISPENSER SYSTEM	n/a	n/a	dispenser system	106923	1	40
99	SPRAY FILLER	1 L	grey	tin	100315	6	486
99	CELLUPLAST	175ml	red	tube	102477	12	1248
99	CELLUPLAST	750gr	red	tin	103430	12	648
100	POLY LIQUID	1 kg	brown	tin	103438	6	300
100	FIBRE GLASS MAT	0.5m ²	n/a	pack	104443	12	864
100	FIBRE GLASS MAT	1m ²	n/a	pack	104442	12	576
100	POLYFIBER	250gr	grey	tin	103431	12	1008
100	POLYFIBER	500gr	grey	tin	103432	12	864
100	POLYFIBER	1 kg	grey	tin	103433	12	648
100	POLYFIBER	1.5 kg	grey	tin	103434	6	420
100	POLYFIBER CLEAR	1.5 kg	clear	tin	103435	6	420
100	POLYSET	250gr	n/a	kit	103436	12	576
100	POLYSET	1 kg	n/a	kit	103437	6	240
AUTOMOTIVE RANGE - SEALANTS, ADHESIVES & COATINGS							
101	CARBOND 940 FC	310ml	black	cartridge	103445	12	1152
101	CARBOND 940 FC	310ml	grey	cartridge	103446	12	1152
101	CARBOND 940 FC	310ml	white	cartridge	103447	12	1152

Product Information

PAGE NO.	PRODUCT NAME	SIZE	COLOUR	PACK TYPE	PRODUCT NUMBER	BOX UNITS	PALLET UNITS
101	CARBOND 955 DG	310ml	black	cartridge	105894	6	1200
101	CARBOND 955 DG	30ml	clear	flask	105928	6	12000
101	CARBOND 955 DG	30ml	n/a	flask	105927	6	14400
101	GASKET SEAL	80ml	red	tube	103459	12	2352
101	GASKET SEAL	310ml	red	cartridge	103460	12	1152
102	CARJOINT	310ml	grey	cartridge	103454	12	1560
102	CARSEALER	310ml	grey	cartridge	101838	12	1152
102	CARSEALER	1 kg	grey	tin	102352	6	2376
102	MS SEAM SEALER	290ml	grey	cartridge	110326	12	1200
102	MS SEAM SEALER	290ml	beige	cartridge	110327	12	1200
102	MS SEAM SEALER GUN		n/a	gun	108068	1	999
102	MS SEAM SEALER GUN CONNECTION RING		n/a	connection ring	102582	1	999
102	SOUDAFLOOR SL2	10kg	grey	tin	103483	1	8
102	SL2 PRIMER	5 L	n/a	tin	100226	1	45
102	ROLLER SOUDAFLOOR SL2	n/a	n/a	brush	106690	1	140
102	ANTI SLIP STONE CHIPS	25kg	n/a		100777	1	999
AUTOMOTIVE RANGE - ANTI-CORROSION							
103	UNDERBODY PROTECTION AEROSOL	500ml	black	aerosol	106702	12	600
103	UNDERBODY PROTECTION GUN	1 kg	black	tin	106703	12	600
103	UNDERBODY PROTECTION GUN	5 kg	black	tin	106705	4	384
103	UNDERBODY PROTECTION BRUSH	1 kg	black	tin	106704	4	480
103	UNDERBODY PROTECTION BRUSH	5 kg	black	tin	106662	1	384
103	UNDERBODY PROTECTION BRUSH	60 kg	black	tin	106511	12	6
103	ANTI GRAVEL AEROSOL	500ml	black	aerosol	106706	12	672
103	ANTI GRAVEL AEROSOL	500ml	grey	aerosol	106709	12	600
103	ANTI GRAVEL GUN	1 kg	black	tin	106707	12	600
103	ANTI GRAVEL GUN	1 kg	grey	tin	106710	12	600
103	ANTI GRAVEL GUN	1 kg	white	tin	106708	12	600
103	INCOAT ML AEROSOL	500ml	brown	tin	106711	12	56
103	INCOAT ML GUN	1 L	brown	tin	106712	12	50
103	INCOAT ML WAX GUN	1 L	clear	tin	106713	12	50
103	INCOAT ML WAX GUN	25 L	clear	tin	106763	1	22
103	PNEUMATIC COATING GUN	n/a	n/a	gun	106813	1	200
PROFESSIONAL BIKE RANGE - CLEANERS							
104	BIKE CLEANER	1L	yellow	bottle	128370	6	600
104	CHAIN CLEANER GENIUS SPRAY	500ml	transparent	genius spray	130525	6	1044
105	MUD REMOVER	1L	green	bottle	128363	6	540
105	DISC CLEANER	400ml	transparent	aerosol	128364	6	1044
105	PROTECT & POLISH	400ml	transparent	aerosol	128365	6	1044
105	BIKE WIPES - SPECIAL CYCLING	50 pcs	n/a	tub	128369	6	624
PROFESSIONAL BIKE RANGE - LUBRICATION							
106	DRY WAX	100ml	white	bottle	128366	12	1200
106	DRY WEATHER LUBRICANT	100ml	yellowish	bottle	128406	12	1200
106	WET WEATHER LUBRICANT	100ml	yellowish	bottle	128407	12	1200
106	ALL WEATHER LUBRICANT	400ml	transparent	aerosol	128367	6	1044
107	ASSEMBLY PASTE	200ml	light brown	tub	128545	6	1470
107	CARBON ASSEMBLY PASTE	200ml	anthracite	tub	128596	6	1470
107	SILICONE PASTE	200ml	transparent	tub	128368	6	1470
107	SODAL BIKE BOX	pack	n/a	multi-pack	128546	8	48
MARKETING MATERIAL							
108	RED DISPLAY STAND	n/a	n/a	stand	120165	n/a	n/a

PAGE NO.	PRODUCT NAME	SIZE	COLOUR	PACK TYPE	PRODUCT NUMBER	BOX UNITS	PALLET UNITS
108	RED DISPLAY STAND - PRODUCT TRAY	n/a	n/a	tray	120305	n/a	n/a
108	SWIPEX FREE STANDING DISPLAY UNIT	n/a	n/a	display unit	132770	n/a	n/a
108	GENIUS GUN FREE STANDING DISPLAY UNIT	n/a	n/a	display unit	131302	n/a	n/a
108	T-REX FREE STANDING DISPLAY UNIT	n/a	n/a	display unit	131303	n/a	n/a
108	FIX ALL COUNTER TOP DISPLAY UNIT	n/a	n/a	display unit	127334	n/a	n/a
109	2018 PRODUCT CATALOGUE	n/a	n/a	catalogue	135517	n/a	n/a
109	SILIRUB RANGE DL LEAFLET	n/a	n/a	leaflet	135501	n/a	n/a
109	FIX ALL A3 PRODUCT SELECTOR	n/a	n/a	selector	321447	n/a	n/a
109	FIX ALL RANGE DL LEAFLET	n/a	n/a	leaflet	131586	n/a	n/a
109	SOUDABOND EASY APPLICATION MANUAL	n/a	n/a	manual	131453	n/a	n/a
109	SOUDABOND EASY A5 FLYER	n/a	n/a	flyer	135503	n/a	n/a
109	SOUDABOND EASY A4 PANEL/POSTER	n/a	n/a	flyer	135502	n/a	n/a
110	SOUDAFOAM RANGE A4 LEAFLET	n/a	n/a	leaflet	131623	n/a	n/a
110	SOUDAFOAM RANGE DL LEAFLET	n/a	n/a	leaflet	131624	n/a	n/a
110	BUILDING AIRTIGHTNESS A4 BOOKLET	n/a	n/a	booklet	132327	n/a	n/a
110	SOUDATIGHT LIQUID MEMBRANES A4 BOOKLET	n/a	n/a	booklet	132329	n/a	n/a
110	FIRE SOLUTIONS A4 BOOKLET	n/a	n/a	booklet	128773	n/a	n/a
110	SOUDATHERM ROOF A4 BOOKLET	n/a	n/a	booklet	128034	n/a	n/a
111	TECHNICAL AEROSOLS A4 BOOKLET	n/a	n/a	booklet	132278	n/a	n/a
111	7" LCD SCREEN	n/a	n/a	LCD screen	125627	n/a	n/a
111	SOUDAL PRODUCT BOX	n/a	n/a	box	300034	n/a	n/a
111	SOUDAL PEN	n/a	n/a	pen	122238	n/a	n/a
111	SOUDAL CARRIER BAG	n/a	n/a	bag	132019	n/a	n/a

Silirub® color

RAL CLASSIC Colours	Product Code
RAL 1000 green beige	117256
RAL 1001 beige	119022
RAL 1002 sand yellow	119643
RAL 1003 signal yellow	
RAL 1004 golden yellow	122658
RAL 1005 honey yellow	
RAL 1006 maize yellow	
RAL 1007 daffodil yellow	
RAL 1011 brown beige	119053
RAL 1012 lemon yellow	124439
RAL 1013 oyster white	105822
RAL 1014 ivory	113190
RAL 1015 light ivory	105827
RAL 1016 sulfur yellow	
RAL 1017 saffron yellow	115875
RAL 1018 zinc yellow	123882
RAL 1019 grey beige	114640
RAL 1020 olive yellow	123847
RAL 1021 rape yellow	
RAL 1023 traffic yellow	118764
RAL 1024 ochre yellow	125616
RAL 1026 luminous yellow	
RAL 1027 curry	
RAL 1028 melon yellow	
RAL 1032 broom yellow	123440
RAL 1033 dahlia yellow	
RAL 1034 pastel yellow	
RAL 1035 pearl beige	
RAL 1036 pearl gold	121807
RAL 1037 sun yellow	
RAL 2000 yellow orange	120568
RAL 2001 red orange	121298
RAL 2002 vermilion	
RAL 2003 pastel orange	
RAL 2004 pure orange	
RAL 2005 luminous orange	
RAL 2007 luminous bright orange	
RAL 2008 bright red orange	
RAL 2009 traffic orange	
RAL 2010 signal orange	
RAL 2011 deep orange	

RAL CLASSIC Colours	Product Code
RAL 2012 salmon orange	
RAL 2013 pearl orange	114472
RAL 3000 flame red	116256
RAL 3001 signal red	115954
RAL 3002 carmine red	118878
RAL 3003 ruby red	113060
RAL 3004 purple red	115681
RAL 3005 wine red	105828
RAL 3007 black red	115304
RAL 3009 oxid red	114119
RAL 3011 brown red	123396
RAL 3012 beige red	
RAL 3013 tomato red	117108
RAL 3014 antique pink	
RAL 3015 light pink	114295
RAL 3016 coral red	117137
RAL 3017 rose	
RAL 3018 strawberry red	
RAL 3020 traffic red	114294
RAL 3022 salmon pink	119078
RAL 3024 luminous red	
RAL 3026 luminous bright red	
RAL 3027 raspberry red	
RAL 3031 orient red	
RAL 3032 pearl ruby red	
RAL 3033 pearl pink	
RAL 4001 red lilac	
RAL 4002 red violet	
RAL 4003 heather violet	
RAL 4004 claret violet	
RAL 4005 blue lilac	123959
RAL 4006 traffic purple	
RAL 4007 purple violet	
RAL 4008 signal violet	
RAL 4009 pastel violet	
RAL 4010 telemagenta	
RAL 4011 pearl violet	
RAL 4012 pearl blackberry	
RAL 5000 lilac blue	115029
RAL 5001 green blue	116103
RAL 5002 ultramarine blue	117165

RAL CLASSIC Colours	Product Code
RAL 5003 sapphire blue	114148
RAL 5004 black blue	130375
RAL 5005 signal blue	
RAL 5007 brilliant blue	116146
RAL 5008 grey blue	115253
RAL 5009 azure blue	113809
RAL 5010 gentian blue	114299
RAL 5011 steel blue	105829
RAL 5012 light blue	114242
RAL 5013 cobalt blue	116631
RAL 5014 pigeon blue	115964
RAL 5015 sky blue	111738
RAL 5017 traffic blue	115130
RAL 5018 turquoise blue	116945
RAL 5019 capri blue	123940
RAL 5020 ocean blue	121783
RAL 5021 water blue	116321
RAL 5022 night blue	
RAL 5023 distant blue	114103
RAL 5024 pastel blue	115185
RAL 5025 pearl gentian blue	
RAL 5026 pearl night blue	
RAL 6000 patina green	127326
RAL 6001 emerald green	
RAL 6002 leaf green	116630
RAL 6003 olive green	114007
RAL 6004 blue green	116001
RAL 6005 moss green	114104
RAL 6006 grey olive	117130
RAL 6007 bottle green	122210
RAL 6008 brown green	
RAL 6009 fir green	105830
RAL 6010 grass green	113227
RAL 6011 reseda green	116325
RAL 6012 black green	116617
RAL 6013 reed green	122656
RAL 6014 yellow olive	
RAL 6015 black olive	117002
RAL 6016 turquoise green	121904
RAL 6017 may green	121170
RAL 6018 yellow green	114478

Silirub® color

RAL CLASSIC Colours	Product Code
RAL 6019 whitegreen	114116
RAL 6020 chrome green	121158
RAL 6021 pale green	115986
RAL 6022 olive drab	114298
RAL 6024 traffic green	
RAL 6025 fern green	
RAL 6026 opal green	
RAL 6027 light green	
RAL 6028 pine green	115058
RAL 6029 mint green	119252
RAL 6032 signal green	
RAL 6033 mint turquoise	123284
RAL 6034 pastel turquoise	120430
RAL 6035 pearl green	
RAL 6036 pearl opal green	
RAL 7000 squirrel grey	115391
RAL 7001 silver grey	114243
RAL 7002 olive grey	116710
RAL 7003 moss grey	114568
RAL 7004 signal grey	116632
RAL 7005 mouse grey	113691
RAL 7006 beige grey	115028
RAL 7008 khaki grey	115879
RAL 7009 green grey	114636
RAL 7010 tent grey	113838
RAL 7011 iron grey	114481
RAL 7012 basalt grey	115682
RAL 7013 brown grey	114484
RAL 7015 slate grey	116060
RAL 7016 anthracite grey	105831
RAL 7021 grey black	115271
RAL 7022 umbra grey	114267
RAL 7023 concrete grey	114170
RAL 7024 graphite grey	120487
RAL 7026 granite grey	121199
RAL 7030 stone grey	113159
RAL 7031 blue grey	115230
RAL 7032 pebble grey	110727
RAL 7033 cement grey	115570
RAL 7034 yellow grey	115097
RAL 7035 light grey	118489

RAL CLASSIC Colours	Product Code
RAL 7036 platinum grey	118402
RAL 7037 dusty grey	114005
RAL 7038 agate grey	114293
RAL 7039 quartz grey	113228
RAL 7040 window grey	116968
RAL 7042A traffic grey A	117801
RAL 7043B traffic grey B	117237
RAL 7044 silk grey	116033
RAL 7045 telegrey 1	121263
RAL 7046 telegrey 2	118043
RAL 7047 telegrey 4	114720
RAL 7048 pearl mouse grey	118963
RAL 8000 green brown	126000
RAL 8001 ochre brown	114749
RAL 8002 signal brown	117671
RAL 8003 clay brown	116305
RAL 8004 copper brown	119493
RAL 8007 fawn brown	121808
RAL 8008 olive brown	
RAL 8011 nut brown	121061
RAL 8012 red brown	119172
RAL 8014 sepia brown	114296
RAL 8015 chestnut brown	118186
RAL 8016 mahogany brown	118698
RAL 8017 chocolate brown	114750
RAL 8019 grey brown	116106
RAL 8022 black brown	124358
RAL 8023 orange brown	116567
RAL 8024 beige brown	119814
RAL 8025 pale brown	121279
RAL 8028 terra brown	121060
RAL 8029 pearl copper	
RAL 9001 cream	105870
RAL 9002 grey white	116322
RAL 9003 signal white	124216
RAL 9004 signal black	115955
RAL 9005 jet black	127838
RAL 9006 aluminium white	106735
RAL 9007 grey aluminium	111713
RAL 9010 pure white	118401
RAL 9011 graphite black	

RAL CLASSIC Colours	Product Code
RAL 9016 traffic white	116894
RAL 9017 traffic black	
RAL 9018 papyrus white	121497
RAL 9022 pearl light grey	117131
RAL 9023 pearl dark grey	129174

* Please check standard RAL® Colours



A large rectangular area with horizontal lines, intended for taking notes.



Soudal (UK) Limited
Soudal House, Unit 1,
Centurion Way, Centurion Park,
Tamworth, B77 5PN
☎ 01827 261 092
☎ 01827 284 454
🌐 salesuk@soudal.com

www.soudal.com
www.fixall.co.uk

Headquarters:
Soudal N.V.
Everdongenlaan 18-20,
BE-2300 Turnhout
☎ +32 14 42 42 31
☎ +32 14 42 65 14
🌐 info@soudal.com

Add Us on Social Media:



@soudal_uk



@soudalgroup



Soudal

Distributor information

